

Datalogic Scanning, Inc.  
959 Terry Street  
Eugene, Oregon 97402  
USA  
Telephone: (541) 683-5700  
Fax: (541) 345-7140

An Unpublished Work - All rights reserved. No part of the contents of this documentation or the procedures described therein may be reproduced or transmitted in any form or by any means without prior written permission of Datalogic Scanning, Inc. or its subsidiaries or affiliates ("Datalogic" or "Datalogic Scanning"). Owners of Datalogic products are hereby granted a non-exclusive, revocable license to reproduce and transmit this documentation for the purchaser's own internal business purposes. Purchaser shall not remove or alter any proprietary notices, including copyright notices, contained in this documentation and shall ensure that all notices appear on any reproductions of the documentation. Should future revisions of this manual be published, you can acquire printed versions by contacting your Datalogic representative. Electronic versions may either be downloadable from the Datalogic website ([www.scanning.datalogic.com](http://www.scanning.datalogic.com)) or provided on appropriate media. If you visit our website and would like to make comments or suggestions about this or other Datalogic publications, please let us know via the "Contact Datalogic" page.

**DISCLAIMER**

Datalogic has taken reasonable measures to provide information in this manual that is complete and accurate, however, Datalogic reserves the right to change any specification at any time without prior notice. Datalogic is a registered trademark of Datalogic S.p.A. in many countries and the Datalogic logo is a trademark of Datalogic S.p.A. all licensed to Datalogic Scanning, Inc. All other trademarks and trade names referred to herein are property of their respective owners.

**SERVICES AND SUPPORT**

Datalogic provides several services as well as technical support through its website. Log on to [www.scanning.datalogic.com](http://www.scanning.datalogic.com) and click on the links indicated for further information including:

- PRODUCTS**  
Search through the links to arrive at your product page where you can download specific Manuals and Software & Utilities including:
  - Datalogic Aladdin™, a multi-platform utility program that allows device configuration using a PC. It provides RS-232 interface configuration as well as configuration barcode printing.
- SERVICE & SUPPORT**
  - Technical Support - Product documentation and programming guides and Technical Support Department in the world
  - Service Programs - Warranty Extensions and Maintenance Agreements
  - Repair Services - Flat Rate Repairs and Return Material Authorization (RMA) Repairs.
  - Downloads – Manuals & Documentation, Data Sheets, Product Catalogues, etc.
- CONTACT US**  
Information Request Form and Sales & Service Network

**DECLARATION OF CONFORMITY**



Datalogic Scanning Group Srl  
Via S. Vitalino, 13  
Lippo di Calderara di Reno (BO)  
40012 Italy

EC-037  
Rev.: 3  
Pag.: 1 di 1

dichiara che  
declares that the  
déclare que le  
bescheinigt, daß das Gerät  
declare que el

TOUCH 65 XXX and TOUCH 90 XXX; Barcode Reader

e tutti i suoi modelli  
and all its models  
et tous ses modèles  
und seine Modelle  
y todos sus modelos

sono conformi alle Direttive del Consiglio Europeo sottelenate:  
are in conformity with the requirements of the European Council Directives listed below:  
sont conformes aux spécifications des Directives de l'Union Européenne ci-dessous:  
den nachstehenden angeführten Direktiven des Europäischen Rats:  
cumple con los requisitos de las Directivas del Consejo Europeo, según la lista siguiente:

**2004/108/EC EMC Directive**

Basate sulle legislazioni degli Stati membri in relazione alla compatibilità elettromagnetica ed alla sicurezza dei prodotti.  
On the approximation of the laws of Member States relating to electromagnetic compatibility and product safety.  
Basée sur la législation des Etats membres relative à la compatibilité électromagnétique et à la sécurité des produits.  
Über die Annäherung der Gesetze der Mitgliedsstaaten in bezug auf elektromagnetische Verträglichkeit und Produktsicherheit entsprechen.  
Basado en la aproximación de las leyes de los Países Miembros respecto a la compatibilidad electromagnética y las Medidas de seguridad relativas al producto.

Questa dichiarazione è basata sulla conformità dei prodotti alle norme seguenti:  
This declaration is based upon compliance of the products to the following standards:  
Cette déclaration repose sur la conformité des produits aux normes suivantes:  
Diese Erklärung basiert darauf, daß das Produkt den folgenden Normen entspricht:  
Esta declaración se basa en el cumplimiento de los productos con la siguientes normas:

**EN 55022 (CLASS B ITE ), SEPTEMBER 2006:** LIMITS AND METHODS OF MEASUREMENTS OF RADIO DISTURBANCE CHARACTERISTICS OF INFORMATION TECHNOLOGY EQUIPMENT  
**AMENDMENT A1: OCTOBER 2007:** INFORMATION TECHNOLOGY EQUIPMENT IMMUNITY CHARACTERISTICS LIMITS AND METHODS OF MEASUREMENTS

**EN 55024, SEPTEMBER 1998:** LIMITS AND METHODS OF MEASUREMENTS OF IMMUNITY CHARACTERISTICS OF INFORMATION TECHNOLOGY EQUIPMENT

Lippo di Calderara, November 14th, 2011

Ruggero Cacioppo  
Quality Assurance Manager

*Ruggero Cacioppo*



**Touch™ 65/90 Pro  
CONTACT READERS**



**QUICK REFERENCE GUIDE**



©2007-2012 Datalogic Scanning, Inc. 820048214 (Rev. H)

January-2012

China RoHS		有毒有害物质或元素	
PART	部件名称	Hexavalent Chromium (Cr(VI))	Polybrominated biphenyls (PBB)
Printed Circuit Board Assembly	电路板组件	六价铬	多溴联苯
Asy, Optics Block	光学组件	镉	多溴联苯
Asy, Module	光学组件	汞	多溴联苯


**O:** 代表此种部件的所有均质材料中所含的有毒有害物质的含量均低于中华人民共和国信息产业部颁布的《电子信息产品中有害物质的限量要求》(SJ/T 11363-2006) 规定的限量。  
**X:** 代表此种部件所用的均质材料中, 至少有一类材料其所含的有毒有害物质的含量高于中华人民共和国信息产业部颁布的《电子信息产品中有害物质的限量要求》(SJ/T 11363-2006) 规定的限量

**CONNECTIONS**

**USB**



**WEDGE**

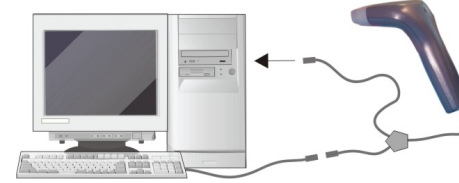

**RS-232**



**PEN**



**DISCONNECTING THE CABLE**



**USING TOUCH™ PRO SERIES READERS**



Touch™ Pro readers scan barcodes on contact. All models have a hardware trigger button, which by default must be pressed to read a code. After configuring the reader interface type, the software trigger parameter (available in this manual) can be selected so that the reader operates like a model without trigger.

Code scanning is performed along an imaginary line passing across the reading window. This imaginary line must pass through the entire code. Successful scanning is obtained by keeping the handle of the reader parallel with respect to the code surface, see the figure above.

**COMPLIANCE**

**LED CLASS**

Class 1 LED product.

This product conforms to EN60825-1:2001.

**FCC COMPLIANCE**

Modifications or changes to this equipment without the expressed written approval of Datalogic could void the authority to use the equipment.

This device complies with PART 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference which may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

**POWER SUPPLY**

This device is intended to be connected to a UL Listed/CSA Certified computer which supplies power directly to the reader or else be supplied by a UL Listed/CSA Certified Power Unit marked "Class 2" or LPS power source rated 5 V, minimum 150 mA, which supplies power directly to the reader via the power connector of the cable.

**PATENTS**

This product is licensed under the following U.S. patent: 6,158,661  
This product is covered by one or more of the following patents:  
U.S. patents 5,917,176; 5,992,740; 6,010,073; 6,305,606 B1; 6,517,003 B2; and 6,712,271 B2

European patents 829,814 B1; 851,378 B1; and 895,175 B1

Additional patents pending.

**WEEE COMPLIANCE**



Waste Electrical and Electronic Equipment (WEEE) Statement

**English**

For information about the disposal of Waste Electrical and Electronic Equipment (WEEE), please refer to the website at [www.scanning.datalogic.com](http://www.scanning.datalogic.com).

**Italian**

Per informazioni sullo smaltimento delle apparecchiature elettriche ed elettroniche consultare il sito Web [www.scanning.datalogic.com](http://www.scanning.datalogic.com).

**French**

Pour toute information relative à l'élimination des déchets électroniques (WEEE), veuillez consulter le site Internet [www.scanning.datalogic.com](http://www.scanning.datalogic.com).

**German**

Informationen zur Entsorgung von Elektro- und Elektronik- Altgeräten (WEEE) erhalten Sie auf der Webseite [www.scanning.datalogic.com](http://www.scanning.datalogic.com).

**Spanish**

Si desea información acerca de los procedimientos para el desecho de los residuos del equipo eléctrico y electrónico (WEEE), visite la página Web [www.scanning.datalogic.com](http://www.scanning.datalogic.com).

**Portuguese**

Para informações sobre a disposição de Sucatagem de Equipamentos Elétricos e Eletrônicos (WEEE - Waste Electrical and Electronic Equipment), consultar o site web [www.scanning.datalogic.com](http://www.scanning.datalogic.com).

**Chinese**

有关处理废弃电气电子设备 (WEEE) 的信息, 请参考Datalogic公司的网站: <http://www.scanning.datalogic.com/>.

**Japanese**

廃電気電子機器 (WEEE) の処理についての関連事項はDatalogicのサイト [www.scanning.datalogic.com](http://www.scanning.datalogic.com), をご参照下さい。

## DEFAULT VALUES

### USB-KBD DEFAULT SETTINGS

USA keyboard, FIFO enabled, inter-character and inter-code delays disabled, control character emulation = ctrl+shift+key.

DATA FORMAT: code identifier disabled, no field adjustment, code length not transmitted, no header, terminator = ENTER, character replacement disabled.

### RS-232 Standard DEFAULT SETTINGS

9600 baud, no parity, 8 data bits, 1 stop bit, no handshaking, delay disabled, rx timeout 5 sec., ack/nack disabled, FIFO enabled, serial trigger lock disabled.

DATA FORMAT: code identifier disabled, no field adjustment, code length not transmitted, no header, terminator = CR-LF, character replacement disabled.

### WEDGE DEFAULT SETTINGS

USA keyboard, caps lock off, caps lock auto-recognition enabled, num lock unchanged, inter-character and inter-code delays disabled, control character emulation = ctrl+shift+key.

DATA FORMAT: code identifier disabled, no field adjustment, code length not transmitted, no header, terminator = ENTER, character replacement disabled.

### PEN DEFAULT SETTINGS

interpret mode, conversion to code 39 disabled, output level normal, idle level normal, minimum output pulse 600 μs, overflow medium, inter-block delay disabled.

### CODE SELECTION

#### Enabled codes

- EAN 8/EAN 13 / UPC A/UPC E without ADD ON check digit transmitted, no conversions
- Interleaved 2/5 check digit control and transmission, variable length code; 4-99 characters
- Standard Code 39 no check digit control, variable length code; 1-99 characters
- Code 128 variable length code; 1-99 characters

#### Disabled codes

EAN 128, ISBT128, Code 93, Codabar, pharmaceutical codes, MSI, Plessey, Telepen, Delta IBM, Code 11, Code 16K, Code 49, RSS Codes

## TECHNICAL FEATURES

Electrical Features		
Power Supply	RS-232 interface	
	5 Vdc ± 5%	
Consumption:		
Maximum	150 mA @ 5 Vdc	
Operating	100 mA @ 5 Vdc	
Sleep mode & USB Suspend Mode	< 500 μA @ 5 Vdc	
Max. Scan Rate	256 scans/sec	
Reading Indicators	LED, Beeper	
Optical Features		
	Touch™ 65 Pro	Touch™ 90 Pro
Sensor	CCD solid state (2048 pixels)	
Reading Field	63 mm typical	80 mm typical
Max. Resolution	0.10 mm (4 mils)	0.13 mm (5 mils)
P.S	min. 15% (Datalogic Test Chart)	
Environmental Features		
Working Temperature	0° to +55 °C / 32° to 131 °F	
Storage Temperature	-20° to +70 °C / -4° to 158 °F	
Humidity	90% non condensing	
Drop Resistance	1.2 m (3 ft 11 in)	
ESD Protection	16 KV	
Protection Class	IP30	
Mechanical Features		
Weight (without cable)	about 160 g (5.6 oz)	about 195 g (6.8 oz)
Cable Length	2 m (6 ft 6 in)	

## RESTORE DEFAULT

### RESTORE DEFAULT



To change the defaults refer to the HHD II Software Configuration Manual or to the DL Sm@rtSet™ Configuration program, both downloadable from the website.

## INTERFACE SELECTION

Select one of the interface codes according to your application.

### USB INTERFACE SELECTION

#### USB-KBD



#### USB-KBD - ALT-mode



#### USB-COM \*



#### USB-IBM-Hand Held



\* When configuring USB-COM, the relevant files and drivers must be installed from the USB Device Installation software, which can be downloaded from the web site <http://www.scanning.datalogic.com>.

### PEN EMULATION INTERFACE SELECTION

#### PEN



### RS-232 INTERFACE SELECTION

#### RS-232 Standard



#### Nixdorf Mode A



#### Fujitsu



#### ICL Mode



### WEDGE INTERFACE SELECTION

#### Wedge IBM AT or PS/2 PCs



#### PC Notebook



#### PC Notebook - ALT mode



#### IBM AT - ALT mode



Many other interfaces are supported and can be selected from the HHD II Software Configuration Manual available online at <http://www.scanning.datalogic.com>. Other supported interfaces:

**USB:** USB-IBM-Table Top; USB-KBD-APPLE

**WEDGE:** IBM XT; IBM SURE1; IBM Terminal 3153; IBM Terminals 31xx, 32xx, 34xx, 37xx; Wyse Terminals ANSI – PC –ASCII – VT220 style Keyboards; Digital Terminal VT2xx/VT3xx/VT4xx; APPLE ADB Bus

## KEYBOARD NATIONALITY

USB-KBD and Wedge users should select one of the following wedge keyboard nationality codes according to your keyboard.

#### Belge



#### Deutsch



#### English



#### Español



#### Français



#### Italiano



#### Japanese



#### Svenskt



#### USA (Default)



## DATA FORMAT TERMINATORS

For your convenience, some common Terminators are given below. For other Header/Terminator selections, Data Format and Advanced Data Format parameters see the HHD II Software Configuration Manual.

#### CR-LF



#### Enter



#### Tab



#### None



## OPERATING TEST

Read the TEST code below.

#### Code 128



t e s t

## TRIGGER SELECTION

After configuring the reader interface type, the software trigger parameter can be selected so that the reader operates like a model without trigger.

#### Software Trigger



#### ◆ Hardware Trigger



## DATALOGIC SCANNING LIMITED FACTORY WARRANTY

### Warranty Coverage

Datalogic warrants this product against defects in workmanship and materials, for a period of 5 years from the date of shipment, provided that the product is operated under normal and proper conditions. Datalogic Scanning ("Datalogic") hardware products are warranted against defects in material and workmanship under normal and proper use. The liability of Datalogic under this warranty is limited to furnishing the labor and parts necessary to remedy any defect covered by this warranty and restore the product to its normal operating condition. Repair or replacement of product during the warranty does not extend the original warranty term. Products are sold on the basis of specifications applicable at the time of manufacture and Datalogic has no obligation to modify or update products once sold.

If Datalogic determines that a product has defects in material or workmanship, Datalogic shall, at its sole option repair or replace the product without additional charge for parts and labor, or credit or refund the defective products duly returned to Datalogic. To perform repairs, Datalogic may use new or reconditioned parts, components, subassemblies or products that have been tested as meeting applicable specifications for equivalent new material and products. Customer will allow Datalogic to scrap all parts removed from the repaired product. The warranty period shall extend from the date of shipment from Datalogic for the duration published by Datalogic for the product at the time of purchase (Warranty period). Datalogic warrants repaired hardware devices against defects in workmanship and materials on the repaired assembly for a 90 day period starting from the date of shipment of the repaired product from Datalogic or until the expiration of the original warranty period, whichever is longer. Datalogic does not guarantee, and it is not responsible for, the maintenance of, damage to, or loss of configurations, data, and applications on the repaired units and at its sole discretion can return the units in the "factory default" configuration or with any software or firmware update available at the time of the repair (other than the firmware or software installed during the manufacture of the product). Customer accepts responsibility to maintain a back up copy of its software and data.

### Warranty Claims Process

In order to obtain service under the Factory Warranty, Customer must notify Datalogic of the claimed defect before the expiration of the applicable Warranty period and obtain from Datalogic a return authorization number (RMA) for return of the product to a designated Datalogic service center. If Datalogic determines Customer's claim is valid, Datalogic will repair or replace product without additional charge for parts and labor. Customer shall be responsible for packaging and shipping the product to the designated Datalogic service center, with shipping charges prepaid. Datalogic shall pay for the return of the product to Customer if the shipment is to a location within the country in which the Datalogic service center is located. Customer shall be responsible for paying all shipping charges, duties, taxes, and any other charges for products returned to any other locations. Failure to follow the applicable RMA policy, may result in a processing fee. Customer shall be responsible for return shipment expenses for products which Datalogic, at its sole discretion, determines are not defective or eligible for warranty repair.

### Warranty Exclusions

The Datalogic Factory Warranty shall not apply to:

- any product which has been damaged, modified, altered, repaired or upgraded by other than Datalogic service personnel or its authorized representatives;
- any claimed defect, failure or damage which Datalogic determines was caused by faulty operations, improper use, abuse, misuse, wear and tear, negligence, improper storage or use of parts or accessories not approved or supplied by Datalogic;
- any claimed defect or damage caused by the use of product with any other instrument, equipment or apparatus;
- any claimed defect or damage caused by the failure to provide proper maintenance, including but not limited to cleaning the upper window in accordance with product manual;
- any defect or damage caused by natural or man-made disaster such as but not limited to fire, water damage, floods, other natural disasters, vandalism or abusive events that would cause internal and external component damage or destruction of the whole unit, consumable items;
- any damage or malfunctioning caused by non-restoring action as for example firmware or software upgrades, software or hardware reconfigurations etc.;
- the replacement of upper window/cartridge due to scratching, stains or other degradation and/or
- any consumable or equivalent (e.g., cables, power supply, batteries, keypads, touch screen, triggers etc.).

### No Assignment

Customer may not assign or otherwise transfer its rights or obligations under this warranty except to a purchaser or transferee of product. No attempted assignment or transfer in violation of this provision shall be valid or binding upon Datalogic.

DATALOGIC'S LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ORAL OR WRITTEN, STATUTORY OR OTHERWISE, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. DATALOGIC SHALL NOT BE LIABLE FOR ANY DAMAGES SUSTAINED BY CUSTOMER ARISING FROM DELAYS IN THE REPLACEMENT OR REPAIR OF PRODUCTS UNDER THE ABOVE. THE REMEDY SET FORTH IN THIS WARRANTY STATEMENT IS THE CUSTOMER'S SOLE AND EXCLUSIVE REMEDY FOR WARRANTY CLAIMS. UNDER NO CIRCUMSTANCES WILL DATALOGIC BE LIABLE TO CUSTOMER OR ANY THIRD PARTY FOR ANY LOST PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL IN-DIRECT, SPECIAL OR CONTINGENT DAMAGES REGARDLESS OF WHETHER DATALOGIC HAD ADVANCE NOTICE OF THE POSSIBILITY OF SUCH DAMAGES.

### Risk of Loss

Customer shall bear risk of loss or damage for product in transit to Datalogic. Datalogic shall assume risk of loss or damage for product in Datalogic's possession. In the absence of specific written instructions for the return of product to Customer, Datalogic will select the carrier, but Datalogic shall not thereby assume any liability in connection with the return shipment.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>