

NEAX®2400IPX
Internet Protocol eXchange

DTERM®
SERIES i
DTERM®
IP
.....
USER GUIDE

NEC

LIABILITY DISCLAIMER

NEC AMERICA, INC. RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS, FUNCTIONS, OR FEATURES, AT ANY TIME, WITHOUT NOTICE.

NEC AMERICA, INC. HAS PREPARED THIS DOCUMENT FOR USE BY ITS EMPLOYEES AND CUSTOMERS. THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF **NEC AMERICA, INC.** AND SHALL NOT BE REPRODUCED WITHOUT PRIOR WRITTEN APPROVAL FROM **NEC AMERICA, INC.**

COPYRIGHT 2003
NEC AMERICA, INC.
PRINTED IN THE USA

TABLE OF CONTENTS



KEYS AND LAMPS	2		
SOFT KEYS	4		
TERMINAL SETUP WITH THE UP/DOWN KEY	10	CALL PARK	33
TERMINAL SETUP WITH THE FEATURE KEY	11	CALL PICK-UP (GROUP)	34
LOGIN/LOGOUT (IP ENABLED DTERM/DTERM IP ONLY)	14	CALL PICK-UP (DIRECT)	34
TO ORIGINATE AN OUTSIDE CALL	16	OUTGOING TRUNK QUEUING	35
TO ORIGINATE AN INTERNAL CALL	16	OFF-HOOK TRUNK QUEUING	36
MULTILINE APPEARANCE	17	EXECUTIVE OVERRIDE	36
TO ORIGINATE A CALL USING SPEED CALLING (ONE-TOUCH BUTTONS)	17	LAST NUMBER REDIAL	37
TO ORIGINATE A CALL USING SPEED CALLING (INDIVIDUAL/GROUP)	18	CALL FORWARDING – ALL CALLS	38
TO ORIGINATE A CALL USING SPEED CALLING – SYSTEM	19	CALL FORWARDING – BUSY LINE	39
ACCOUNT CODE	20	CALL FORWARDING – DON'T ANSWER	41
FORCED ACCOUNT CODE	20	LOGGED OUT IP STATION – CALL DESTINATION	43
AUTHORIZATION CODE	21	CALL BACK	45
VOICE CALL	22	TO SAVE AND REPEAT A NUMBER	46
TO ANSWER A VOICE CALL HANDS-FREE	23	TO LEAVE A MESSAGE	47
AUTOMATIC INTERCOM	23	TO ANSWER A MESSAGE	48
MANUAL INTERCOM	24	VOICE MAIL SYSTEM	49
DIAL INTERCOM	25	MEET-ME PAGING	49
TO PLACE A CALL ON HOLD	26	PAGING TRANSFER	50
TO PLACE A CALL ON EXCLUSIVE HOLD	27	BOSS/SECRETARY TRANSFER	52
TO TRANSFER A CALL	28	BOSS/SECRETARY – MW LAMP CONTROL	53
CONFERENCE	29	BOSS/SECRETARY OVERRIDE	54
TO ESTABLISH A BROKER CALL	30	DO NOT DISTURB	56
TO ANSWER A CAMPED-ON CALL	30	PRIVACY	57
CALL WAITING – ORIGINATING	31	PRIVACY RELEASE	58
		INDEX	60
		LCD DISPLAYS	63
		FACE LAYOUT	70

KEYS AND LAMPS



PROGRAMMABLE KEYS

These are examples of Dterm® features available by pressing the programmable keys. Some features may be programmed by the user. Keys must be programmed by the telephone system administrator.

AICM

Press key to activate "Automatic Intercom."

DICM

Press key to activate "Dial Intercom."

DND (Do Not Disturb)

Press key to activate or cancel "Privacy" feature.

FWD

Press key to activate or cancel "Call Forwarding – All Calls" feature.

FWD-A

Press key to activate, verify or cancel "Call Forwarding – Don't Answer" feature.

MICM

Press key to activate "Manual Intercom."

MULTILINE APPEARANCE

A programmable extra extension key. Press this key to see status of extra extension.

LCD

Liquid Crystal Diode (LCD) display provides Dterm activity information plus date, time and Soft Key operation.

LED

Some Feature keys have a built-in Light Emitting Diode (LED) that lights or flashes according to the activity of that Feature key.

LAMPS

Call Indicator Lamp

Lamp at top of Dterm Display flashes when a call terminates to the terminal. Lamp lights steadily when a message has been left.

FUNCTION KEY ACTIVITIES

- Feature + 1** = Turns microphone on or off.
- Feature + 2** = Adjusts handset receiver volume.
- Feature + 3** = Selects ringer tone.
- Feature + 4** = Adjusts transmission/receiving volume.
- Feature + 5** = Activates hands-free operation.
- Feature + 6** = Deactivates hands-free operation.
- Feature + 7** = Turns call indicator lamp on or off for incoming call notification. (If turned off, this lamp will still light to indicate message waiting.)
- Feature + 8** = Turns Dynamic Dial Pad on or off.

SOFT KEYS



The Soft Keys on the Dterm® Series i/Dterm IP provide a set of functions on the LCD that adapts to the changing state of the telephone. While default Soft Key settings are provided, desired functions can be assigned to individual stations as required. The Soft Keys, at the bottom of the LCD, can display the blinking names of available functions, names of user-assigned functions and names of functions assigned by a specific Soft Key pattern. The Soft Keys displayed can vary, depending on the state of the phone and/or when the Next/Previous button is pressed.

Note: Soft Key functionality is optional and may not be available on your Dterm Series i/Dterm IP telephone.



Exit Key

Press the **Exit** key to exit the Help program.

Help Key

Press the **Help** key. Press desired Soft Key for helpful information about that key.

MIC (Microphone)

Press the Soft Key below "MIC" to activate or deactivate the Microphone. LED on Mic key will illuminate when Mic is on.

DND (Do Not Disturb)

Press the Soft Key to allow denying access to the station line for incoming calls.

DEFAULT FUNCTION DISPLAYS FOR EACH STATUS

Default Soft Key settings are provided corresponding to particular functions. Different Soft Key settings are displayed at the bottom of the LCD depending on the state of the call, as shown below.

Different patterns of Soft Key settings can be registered for individual call states and assigned to individual terminals as required.

IDLE



DIAL TONE/ DIALING

(1)



(2)



RINGING



BUSY



CONNECTION



CONSULTATION
HOLD



SOFT KEY FEATURES

When the Soft Key corresponding to a desired function name is operated, the selected function name starts to blink on the LCD. The blinking display of available functions takes precedence over the display of functions specified by the Soft Key pattern.

FDB (Call Forwarding – Busy)

Permits a call to a busy station to be immediately forwarded to a predesignated station.

FDA (Call Forwarding – All Calls)

Permits all calls destined for a particular station to be routed to another station regardless of the busy or idle status of the called station.

CW (Call Waiting)

Enables a busy station to receive a second incoming call. A camp-on indication tone is sent to the busy station, and the user can use a switchhook flash to answer the second call.

HOLD (Call Hold)

Permits a station user to hold a call in progress and to return to the previously held call.

PICK (Call Pickup – Group)

Permits a station user to answer any call directed to other lines in the user's preset Call Pickup Group.

CONF (Three-way Calling)

Enables a station user to establish a three-way conference by connecting an additional party to an already existing conversation.

VOICE (Voice Call)

Enables the user to make a call to the called party's built-in speaker. If the called party's MIC is on, the called party can converse hands-free.

S-SPD (Speed Calling – System)

Allows a station user to call certain frequently dialed numbers using fewer digits (abbreviated call codes) than would normally be required.

CAS (CAS – Switch Hook Flash)

Allows the user to send a switchhook flash while on an outside trunk.

FLASH (Flash)

Provides the station with a switchhook flash.

FDN (Call Forward – No Answer)

Permits a call to an unanswered station to be forwarded to a predesignated station if the called station does not answer within a predetermined period of time.

DND (Do Not Disturb)

Allows a station user to deny access to the station line for incoming calls.

MIC (Microphone On/Off)

Allows the user to turn the microphone on and off for use with the speakerphone.

HSET (Headset)

Allows the user to go off- and on-hook when using the headset.

RLS (Release Key)

Allows the user to release the current call when using the headset, without waiting for the party to hang up.

CKEEP (Eight-Party Conference Retrain)

Allows all outside parties to stay on a conference when all internal parties hang up.

GPICK (Call Pickup – Group Enhancement)

Allows the user to answer any ringing station within the user's expanded call pickup group.

CHCNF (Call Hold – Conference)

Allows a station user to establish a conference connection by adding a third party, who is held on another line, to the existing two-party connection.

>>> (Display Function Next Page)

Allows the user to scroll to the next display screen.

<<< (Display Function Previous Page)

Allows the user to scroll to the previous display screen.

TERMINAL SETUP WITH THE UP/DOWN KEY

.....

Note: Not Displayed for Dterm 65/Dterm Series III and Dterm 75/Dterm Series E mode.

Dterm Series III/Dterm Series E : North America

Dterm 65/Dterm 75 : Australia, Asia, Latin America, Middle East, Russia

TO ADJUST THE HANDSET RECEIVER VOLUME

- ◆ Press the ▲ or ▼ key in the off-hook status or engaged in a call.

LCD display for North America, Latin America, Asia, Middle East and Russia.



LCD display for Australia.



TO ADJUST THE SPEAKER VOLUME

- ◆ Press the ▲ or ▼ key during speakerphone operation or engaged in a call.



TO ADJUST RINGER TONE

- ◆ Press the ▲ or ▼ key during ringing.



TO ADJUST LCD CONTRAST

- ◆ Press the ▲ or ▼ key in the on-hook status.



TERMINAL SETUP WITH THE FEATURE KEY

.....

MICROPHONE ON/OFF

LED on Mic key shows the status of the built-in microphone.

To change microphone status:

- ◆ Press Soft Key associated with the MIC Display or press **Feature** and **1**.

TO ADJUST INITIAL RECEIVING VOLUME

Handset receiver volume can be changed.

To change the handset receiver volume:

- ◆ Press **Feature** and **2**.
The LCD displays the current volume status.



- ◆ Press **Feature** and **2** to alternate between Large and Small volume.



TO SELECT RINGER TONE

The Dterm Series i/Dterm IP has nine kinds of ringer tones that you can select.

- ◆ Press **Feature** and **3**. The LCD displays the selected tone number (n=1 ~ 9).



Note: Tone number 5~9 may not be available in all feature packages.

TONE NO.	FREQUENCY (Hz)	MODULATION (Hz)
1	520/660Hz	16Hz
2	520/660Hz	8Hz
3	1100/1400Hz	16Hz
4	660/760Hz	16Hz
5	MELODY 1	
6	MELODY 2	
7	MELODY 3	
8	MELODY 4	
9	MELODY 5	

TO ADJUST TRANSMISSION/ RECEIVING VOLUME

Handset volume can be changed.

- ◆ Press **Feature** and **4**.
The LCD displays
the current volume.

T/R VOL. **SMALL**
(Time Display)

- ◆ Press **Feature** and **4**
again to alternate
between Small and
Large volume.

T/R VOL. **LARGE**
(Time Display)

TO ACTIVATE HANDS-FREE

To set hands-free on:

- ◆ Press **Feature** and **5**.
The LCD displays:

HANDS FREE **ON**
(Time Display)

To set hands-free off:

- ◆ Press **Feature** and **6**.
The LCD displays:

HANDS FREE **OFF**
(Time Display)

CALL INDICATOR LAMP ON/OFF

The user can choose to turn the call indicator lamp either on or off during ringing.

- ◆ Press **Feature** and **7**.
The LCD displays:

Direct Dial Pad **ON**
(Time Display)

INDICATOR **OFF**
(Time Display)

Note: The call indicator lamp lights when used as a Message Waiting Lamp, even when it is turned off by the above operation.

TO ORIGINATE AN OUTSIDE CALL

- ◆ Lift handset or press **Speaker** key, receive dial tone.
- ◆ Dial the Central Office access code, e.g. 9.
- ◆ Dial desired telephone number.
- ◆ Use handset or MIC to converse.
- ◆ Display indicates:

Elapsed time	Trunk type	Trunk number
15:39	DDD (Time Display)	3

TO ORIGINATE AN INTERNAL CALL

- ◆ Lift handset or press **Speaker** key.
- ◆ Receive dial tone.
- ◆ Dial desired station number. Display indicates digits dialed.
- ◆ Use handset or MIC to converse.

MULTILINE APPEARANCE

TO ORIGINATE

- ◆ Press the **MULTILINE APPEARANCE** feature key.
- ◆ Lift handset or press **Speaker**, receive Central Office or distant PBX dial tone.
- ◆ Dial the destination.

TO ANSWER

- ◆ Press the **MULTILINE APPEARANCE** feature key (ringing and flashing LED alert user to incoming call).
- ◆ Lift handset or press **Speaker**.
- ◆ Speak with incoming party.

TO ORIGINATE A CALL USING SPEED CALLING (ONE-TOUCH BUTTONS)

- ◆ Press the desired **Speed Call** button, or press **Speaker** and **Speed Call**.

TO PROGRAM

Note: Available only on Dterm stations with speed calling keys.

- ◆ Press **Feature** button.
- ◆ Press desired **Speed Call** button.
- ◆ Enter desired telephone number or feature code on the keypad. Display indicates digits dialed.
- ◆ Press **Feature** again to save the number.



SPEED SET
(Time Display)

TO VERIFY (WITH DTERM 8D/16D/32D)

- ◆ Press **Feature** button.
- ◆ Press desired **Speed Dial** button.
- ◆ Display indicates digits programmed.

Note 1: To program a hook switch for transfer or feature activation, press **Recall** key as first digit. (! displays on LCD.)

Note 2: To program a pause, press the **Recall** key as any digit other than the first digit. (– displays on LCD.)

Note 3: To program a Voice Call, press **Transfer** key after dialing station number. (V displays on LCD.)

Note 4: Speed calling for feature access: Speed call keys may use a feature key by storing the NEAX2400 IPX feature access code. The feature may be programmed on a system basis by the PBX engineer.

Access codes may be stored in conjunction with telephone numbers. For example, one button can be programmed by the user to transfer to a certain extension.

TO ORIGINATE A CALL USING SPEED CALLING (INDIVIDUAL/GROUP)




- ◆ Press the **Redial** button.
- ◆ Press the desired speed calling number.




TO ORIGINATE A CALL USING SPEED CALLING – SYSTEM

.....


TO PROGRAM SPEED CALLING – SYSTEM KEY (ON ONE-TOUCH SPEED CALLING KEY)

- ◆ Press **Feature** key.
- ◆ Press desired one-touch speed key. The LCD displays previously stored digits.
- ◆ Dial the "Speed Calling – System" access code and the abbreviated call code.
- ◆ Press **Feature** again.

TO OPERATE FROM THE SPEED CALLING – SYSTEM KEY

- ◆ Press the "**Speed Calling – System**" key.
- ◆ If the Dterm does not have the "Speed Calling – System" key, dial the "Speed Calling – System" access code, then the abbreviated call code.

TO OPERATE FROM THE DIRECTORY KEY

- ◆ Press the **Directory** key.
- ◆ Dial the abbreviated call code (maximum of 4 digits).

VOICE CALL

- ◆ Lift handset.
- ◆ Dial desired station number.
- ◆ Press **Voice**.
- ◆ Speak to called party.



VOICE (Time Display) 2000

USING THE SOFT KEY

- ◆ Lift handset.
- ◆ Dial desired station number; **VOICE** Soft Key appears while station is ringing.
- ◆ Press **VOICE** Soft Key. Speak to called party.



MIC VOICE >>> (Time Display) 2000

Note 1: A Voice Call may be programmed on a one-touch speed key by pressing **Speed Dial** button, dialing the extension and pressing the **Transfer** key. (**V** displays if programming on an LCD Display Dterm. Save by pressing Speed Dial again.)

Note 2: If called party is on their line when a Voice Call is attempted, calling station's display indicates:



VOICE BUSY (Time Display)

Note 3: A voice call is restricted if called party's station is not a Dterm. Display indicates:



VOICE REST (Time Display)

TO ANSWER A VOICE CALL HANDS-FREE

- ◆ Receive incoming Voice Call.
- ◆ Press the **MIC** Soft Key or **Mic.** LED lights.
- ◆ Respond hands-free.




NOTE: If privacy is required, lift handset.

AUTOMATIC INTERCOM

TO INITIATE

- ◆ Lift handset or press **Speaker** key.
- ◆ Press the **AICM** key.
- ◆ Hear ringback tone.



TO ANSWER

- ◆ **AICM** key flashes red indicating an incoming intercom call.
- ◆ Press **AICM**, lift handset or press **Speaker**. LED lights solid green.
- ◆ If called station is engaged in a non-intercom call, the station may press **AICM** after placing



original caller on hold (with **HOLD** key).



MANUAL INTERCOM



TO INITIATE

- ◆ Press **MICM**, lift handset or press **Speaker**, ringback tone is heard.



- ◆ Press the **SIG** key if it is desired for the called station to hear ringing.

TO ANSWER

- ◆ MICM key flashes, indicating an incoming call. Ring tone may also be heard.



- ◆ Press **MICM**.

- ◆ Lift handset or press **Speaker**, LED lights solid green.
- ◆ If called station is engaged in a non-intercom call, the station may press **MICM** after placing original caller on hold (with **Hold** key).




DIAL INTERCOM



TO INITIATE

- ◆ Lift handset or press the **Speaker** key.
- ◆ Press **DICM** key.
- ◆ Dial desired intercom station number. Receive ringback tone.



TO ANSWER

- ◆ **DICM** LED flashes, indicating an incoming intercom call.
- ◆ Press **DICM**.
- ◆ Lift handset or press **Speaker**. LCD shows solid green.



- ◆ If called station is engaged in a non-intercom call, the station may press **DICM** after placing the original call on hold (with the **Hold** key.)



TO PLACE A CALL ON HOLD



- ◆ Press **Hold**.
Held line wink
flashes.



Note: If held line appears on other Dterm stations, the associated LED flashes red slowly.

TO RETRIEVE

- ◆ Lift handset or press **Speaker**.
- ◆ Press held line. Use handset to converse.

Note: Any station with this line appearance can retrieve the call.

IF UNANSWERED

- ◆ After preprogrammed time, Automatic Recall is initiated.
- ◆ Visual and audible signal (rapid flash and ring burst) is sent to station that placed call on hold.

Note 1: A transfer or conference call may be placed on hold depending on software level of the NEAX2400 IPX.

Note 2: Hold shows as a flashing green LED on your phone. The same line on other phones shows as a flashing red LED. **Recall** shows as a flashing green LED on your phone and flashing red LED on other phones with the same line.

TO PLACE A CALL ON EXCLUSIVE HOLD



- ◆ Press **Hold** twice. Line appearance indicates interrupted wink.



Note: If held line appears on other Dterm stations, LED remains steadily lit red.

TO RETRIEVE

- ◆ Lift handset or press **Speaker**.
- ◆ Press held line. Use handset to converse.

Note: Only the Dterm that set Exclusive Hold option can retrieve the call.

IF UNANSWERED


- ◆ After preprogrammed time, Automatic Recall is initiated.
- ◆ Visual and audible signal (rapid flash and ring burst) is sent to station which placed call on Exclusive Hold. **Recall** shows as a flashing green LED on your phone, and solid red on other phones with same line.

Note: Exclusive Hold excludes any other phone from picking up your held call. Exclusive Hold shows as a flashing green LED on your phone. The same line on other phones appears as a solid red LED.

TO TRANSFER A CALL



- ◆ After conversing, ask party to hold.
- ◆ Press **Transfer**.
Receive interrupted dial tone.



- ◆ Dial destination station's extension, hang up or wait for answer.




- ◆ If transferring party hangs up, that station's number appears in the center of recipient's display.



CONFERENCE



- ◆ With call in progress, ask party to hold.
- ◆ Press **Transfer**, receive interrupted dial tone.
- ◆ Dial desired number.
- ◆ After call is answered, press **Conf. Conf** LED lights.
- ◆ Three-way conference is established.



USING THE SOFT KEY

- ◆ With a call in progress, press **Transfer** and dial desired number.
- ◆ After call is answered, press **CONF** Soft Key.
- ◆ Three-way conference is established.
- ◆ If one party hangs up, other two remain connected. **Conf** LED goes out.



TO ESTABLISH A BROKER CALL

- ◆ While engaged in a call and wishing to consult a third party, press **Transfer**. Caller is automatically placed on hold.
- ◆ Dial desired party to consult.
- ◆ Press **Transfer** to return to original caller. Third party is automatically placed on hold.
- ◆ By repeating these steps, it is possible to alternate between calls.

Note: The display indicates connected station or trunk at any given time.



CALL PICK-UP (GROUP)

.....

WHEN A STATION WITHIN PICK-UP GROUP RINGS

- ◆ Lift handset.
- ◆ Press **CALL PICK-UP** or dial "Call Pick-up" access code (may be stored on one-touch speed calling key).
- ◆ Connection to calling party is established.

- ◆ If currently on a call, press **Transfer** and dial "Call Pick-up" access code. The original party is placed on hold.

	Called station	Calling party
PICK UP	2000 DDD	3
	(Time Display)	

USING THE SOFT KEY

- ◆ Lift handset and press **PICK** Soft Key.
- ◆ Connection to calling party is established.

	Called station	Calling party
PICK UP	2000	2001
	(Time Display)	
MIC		>>>

CALL PICK-UP (DIRECT)

.....

TO PROGRAM PICK-UP DIRECT KEY (ONE-TOUCH SPEED KEY)

- ◆ Press **Feature**.
- ◆ Press one-touch speed key.
- ◆ Dial "Direct Call Pick-up" access code.
- ◆ Press **Feature** again.

WHEN A STATION WITHIN THE SYSTEM RINGS

- ◆ Lift handset, receive dial tone.
- ◆ Press **PICK-DIRECT** and dial the station number to be picked up.

– **OR** –

- ◆ Dial “Direct Call Pick-up” access code and the station number to be picked up.
- ◆ Connection to calling party is established.
- ◆ If busy, original call must be placed on hold before new call can be picked up.

	Called station	Calling party
PICK UP	2000 DDD	3
	(Time Display)	



OFF-HOOK TRUNK QUEUING

- ◆ Press **Speaker**, receive dial tone.
- ◆ Dial "Off-hook Queuing" access code.
- ◆ Dial desired telephone number. Encounter a trunk busy condition.
- ◆ Station user receives service set tone and leaves speaker on.
- ◆ The desired number is automatically dialed when a trunk becomes available.

LAST NUMBER REDIAL



TO RECALL THE LAST NUMBER DIALED

- ◆ Press **Redial**. Last number dialed is displayed.
- ◆ Press **Redial** key until desired number is displayed. Up to 5 previously dialed numbers.
- ◆ Pres * (Note)
The number on the display is automatically redialed.
- ◆ When party has answered, lift handset or speak hands-free.



LNR[# or *]/SPD[_ _] -X
XXXXXX

Note:

μ-law Countries: *

CALL FORWARDING – ALL CALLS

TO SET

- ◆ Press **Speaker**. Receive dial tone.
- ◆ If setting for another station, press **MULTILINE APPEARANCE**.
- ◆ Press **FWD** or dial "Call Forwarding – All Calls" access code. Receive special dial tone.
- ◆ Dial destination station or external telephone number. Receive service set tone.
- ◆ **FWD** LED lights (at your station or at the Dterm of the multiline station you are setting).

- ◆ Press **Speaker**.
Call Forwarding – All Calls is set.



USING THE SOFT KEY


- ◆ Press **FDA** Soft Key. Receive special tone.
- ◆ Dial destination; wait for service set tone.
- ◆ "FORWARD SET" is displayed, Call Forwarding for all calls is set.



TO VERIFY (WITH DTERM 8D/16D/32D)


- ◆ Press **FWD**.
- ◆ Display indicates the station number calls are forwarded to.

Note 1: If recipient station is a Dterm 8D/16D/32D, LCD displays:




Note 2: With Soft Key operation, **FDB** flashes on the display.

TO CANCEL

- ◆ Press **Speaker**. Receive dial tone. If cancelling for another station, press **MULTILINE APPEARANCE**.
- ◆ Press **FWD** or dial "Call Forwarding – All Calls" cancel code. Receive service set tone. LED goes out at your station (or the Dterm of the multiline station).

- ◆ Press **Speaker**. Call Forwarding – All Calls is cancelled.


USING THE SOFT KEY

- ◆ Press **FDA** Soft Key.
- ◆ Receive service set tone and "FORWARD CANCEL" is displayed.


CALL FORWARDING – BUSY LINE

.....

TO SET

- ◆ Press **Speaker**. Receive dial tone.
- ◆ If setting for another station, press **MULTILINE APPEARANCE**.
- ◆ Press **FWD-BY** or dial "Call Forwarding – Busy Line" access code. Receive special dial tone.
- ◆ Dial destination station or external telephone number. Receive service set tone.
- ◆ **FWD** LED lights (at your station or at the Dterm of the multiline station you are setting).
- ◆ Press **Speaker**. Call Forwarding – Busy Line is set.


USING THE SOFT KEY

- ◆ Press **FDB** Soft Key. Receive special dial tone.
- ◆ Dial destination; wait for service set tone.
- ◆ "FORWARD SET" is displayed; Call Forwarding – Busy Line is set.



FORWARD SET
(Time Display)
MIC >>>

TO VERIFY (WITH DTERM 8D/16D/32D)

- ◆ Press **FWD-BY**.
- ◆ Display indicates the station number calls are forwarded to.

Note 1: If recipient station is a Dterm 8D/16D/32D, LCD displays:



Forwarding station
FORWARD 2000
(Time Display)

Note 2: With Soft Key operation, **FDB** flashes on the display.

TO CANCEL

- ◆ Press **Speaker**. Receive dial tone. If canceling for another station, press **MULTILINE APPEARANCE**.
- ◆ Press **FWD-BY** or dial "Call Forwarding – Busy Line" cancel code. Receive service set tone. LED goes out at your station (or the Dterm of the multiline station).
- ◆ Press **Speaker**. Call Forwarding – Busy Line is cancelled.



FORWARD CANCEL
(Time Display)

USING THE SOFT KEY

- ◆ Press **FDB** Soft Key.
- ◆ Receive service set tone and "FORWARD CANCEL" is displayed.



FORWARD CANCEL
(Time Display)
MIC >>>

CALL FORWARDING – DON'T ANSWER

.....

TO SET

- ◆ Press **Speaker**. Receive dial tone.
- ◆ If setting for another station, press **MULTILINE APPEARANCE**.
- ◆ Press **FWD-NA** or dial "Call Forwarding – Don't Answer" access code. Receive special dial tone.
- ◆ Dial destination station or external telephone number. Receive service set tone.
- ◆ FWD LED lights (at your station or at the Dterm of the multiline station you are setting).

- ◆ Press **Speaker**.
Call Forwarding –
Don't Answer is set.



USING THE SOFT KEY

- ◆ Press **FDN** Soft Key. Receive special dial tone.
- ◆ Dial destination; wait for service set tone.
- ◆ "FORWARD SET" is displayed; Call Forwarding – Don't Answer is set.




TO VERIFY (WITH DTERM 8D/16D/32D)

- ◆ If verifying for another station, press **MULTILINE APPEARANCE** while idle.
- ◆ Press **FWD-NA**.

- ◆ Display indicates the station number calls are forwarded to.


Note 1: If recipient station is a Dterm 8D/16D/32D, LCD displays:



Note 2: Call Forwarding for Busy Line and Don't Answer may be combined depending upon system programming.

Note 3: With Soft Key operation, FDB flashes on the display.

TO CANCEL

- ◆ Press **Speaker**. Receive dial tone. If cancelling for another station, press **MULTILINE APPEARANCE**.
- ◆ Press **FWD-NA** or dial "Call Forwarding – Don't Answer" cancel code. Receive service set tone. LED goes out at your station (or the Dterm of the multiline station).A blue rectangular LCD display. The text "FORWARD CANCEL" is displayed in large white capital letters. Below it, the text "(Time Display)" is shown in a smaller white font.
- ◆ Press **Speaker**. Call Forwarding – Don't Answer is cancelled.

TO CANCEL

- ◆ Lift handset or press **Speaker** key; receive Dial Tone.
- ◆ Dial "Logged Out IP Station – Call Destination" cancel code; receive service set tone.
- ◆ Replace handset or press **Speaker** key. Logged Out IP Station – Call Destination is canceled.



FORWARD CANCEL
(Time Display)

USING THE SOFT KEY

- ◆ Lift handset or press **Speaker** key; receive Dial Tone.
- ◆ Press **FDL** Soft Key; receive service set tone.
- ◆ Dial destination station number; receive service set tone.
- ◆ "Logged Out IP Station – Call Destination" lamp goes off and FDL indication disappears on the LCD.



FORWARD CANCEL
(Time Display)
MIC >>>

Option 4

- ◆ Boss presses **Answer** and converses with Secretary. Trunk A is placed on hold.
- ◆ Boss denies call, presses **Transfer** to return to Trunk A.
- ◆ Secretary is returned to Trunk B.

Note: If boss has 8/16/32 button display terminal, display always indicates the connected station or trunk at any given time.

DO NOT DISTURB



WHILE IDLE (ON-HOOK)

- ◆ Press **DND**. LED lights.



DND SET
(Time Display)

Note: With Soft Key operation, "DND" flashes when set.

TO CANCEL

- ◆ Press **DND**. LED goes out.



DND CANCEL
(Time Display)

USING THE SOFT KEY

- ◆ Press flashing **DND** Soft Key.



DND CANCEL
MIC DND >>>

Note: **DND** must be programmed by the PBX engineer on a programmable feature key.

Note 1: Station A can be a single-line station if it appears on the Station B Dterm.

Note 2: Up to six parties can break into a two-party conversation (additional hardware required).

INDEX



A

Account Code	20
Answering a Camped-on Call	30
Answering a Message	48
Answering a Voice Call Hands-free	23
Authorization Code	21
Automatic Intercom	23

B

Boss/Secretary – MW Lamp Control	53
Boss/Secretary Override	54
Boss/Secretary Transfer	52
Broker Call, Establishing	30

C

Call Back	45
Call Forwarding – All Calls	38
Call Forwarding – Busy Line	39
Call Forwarding – Don't Answer	41
Call Park	33
Call Pick-up (Direct)	34
Call Pick-up (Group)	34
Call Transfer	28
Call Waiting – Originating	31
Camped-on Call, Answering	30
Conference	29

D

Dial Intercom	25
Do Not Disturb	56

E

Establishing a Broker Call	30
Exclusive Hold	27
Executive Override	36
Exit	5

F

Forced Account Code	20
Function Keys and Lamps	2

H

Headset Key	9
Help	5
Hold	26

I

Internal Call Origination	16
---------------------------	----

L

Last Number Redial	37
Leave a Message	47
Logged Out IP Station – Call Destination	43
Login/Logout (IP Enabled Dterm Only)	14

M

Manual Intercom	24
Meet-me Paging	49

Message, Answering	48
Message, Leaving	47
Microphone Key	5
Multiline Appearance	17

N

Number Save and Repeat	46
------------------------	----

O

Off-hook Trunk Queuing	36
Originating a Call Using Speed Calling (Individual/Group)	18
Originating a Call Using Speed Calling (One-touch Buttons)	17
Originating a Call Using Speed Calling – System	19
Originating an Internal Call	16
Originating an Outside Call	16
Outgoing Trunk Queuing	35
Outside Call Origination	16

P

Paging Transfer	50
Placing a Call on Exclusive Hold	27
Placing a Call on Hold	26
Privacy	57
Privacy Release	58

S

Saving and Repeating a Number	46
Speed Calling – System	19
Speed Calling Call Origination (Individual/Group)	18
Speed Calling Call Origination (One-touch Buttons)	17

T

Terminal Setup with the Feature Key	11
Terminal Setup with the Up/Down Key	10
Transfer a Call	28

V

Voice Call	22
Voice Call Hands-free, Answering	23
Voice Mail System	49

LCD DISPLAYS



15:39 DDD X

Time elapsed, trunk type and number for outside call. Time elapsed for parked call.

XXX DDD X

Parked call retrieved from a remote station, showing the number of the station that parked the call.

C

CALLBACK XXXX

Call Back is activated, showing called or calling number.

CALLBACK SET XXXX

Call Back set for busy called station.

CALLPARK SET X

Incoming call is parked.

CAMP ON DDD X

Camped on call placed on hold.

CONF

Three-party conference established.

Conference for Executive Override.

Conference for Privacy Release.

C WAIT **XXXX**

OR

C WAIT SET **XXXX**

Call Waiting tone sent to or received at busy station show in called or calling number.

Call received on boss' station from secretary's station.

D

DND SET/CANCEL

Do Not Disturb set or canceled.

Direct Dial Pad ON/OFF.

Dynamic Dial Pad status.

E

E-HOLD **XXXX**

Station placed on Exclusive Hold.

F

FORWARD **XXXX**

Station displays forwarding destination.

Call Forwarding – All Calls.

Call Forwarding – Busy Line.

Call Forwarding – Don't Answer.

Logged Out IP Station – Call Destination.

FORWARD SET/CANCEL

Call Forwarding set or canceled.

Call Forwarding – All Calls.

Call Forwarding – Busy Line.

Call Forwarding – Don't Answer.

Logged Out IP Station – Call Destination.

H

HANDS-FREE **ON/OFF**

Hands-free status.

HOLD **XXXX**

Station placed on hold.

I

ICM **X**

Intercom call with called or calling party number.

Automatic Intercom.

Manual Intercom.

Dial Intercom.

Boss Secretary Transfer.

INDICATOR O/OFF

Indicator Lamp status.

L

LNR[*]/SPD[_]-N

Prompt for last number called or Speed Calling number.

Stack Dial.

LOGIN

The IP Enabled Dterm becomes operational when the user enters "Login Code" and "Password."

LOGOUT

Press preassigned Logout button to logout.

M

MSG XXXX HH:MMPM

Message waiting (calling station and time of message).

MESSAGE BUSY

Called station message memory Busy – cannot store addition messages.

MESSAGE CANCEL

Message erased.

MESSAGE REST

Called Station message receipt restricted – not equipped to receive messages.

MESSAGE SET XXXX

Message indication left and busy called station.

MW SET/CANCEL

Message Waiting set or canceled on boss' station from secretary's station.

O

OG-Q SET

Outgoing Trunk Queue – call placed in queue for next available outgoing trunk.

OVERRIDE **X**

Overriding intercom call through bridging.

Automatic Intercom.

Dial Intercom.

Manual Intercom.

OVERRIDE **XXXX**

Executive Override.

P

PICK UP **XXXX** **X**

Call Pickup of station within group showing called and calling stations.

PAGING **X**

OR

PAGING **DDD** **X**

Ready to page station, page waiting or page call connection.

P-RLS SET

Privacy Release set.

P-RLS ?

Prompt requesting privacy release for incoming call.

PRIVACY SET/CANCEL

Privacy set or canceled.

R

RCV VOL. SMALL/LARGE

Receiver Volume status.

RINGER TONE X

Ready for Ringer tone selection.

S

SPEED SET

Speed Calling number saved in memory.

T

TRANSFER

Ready to transfer a call.

TRANSFER XXXX

Transferred station or trunk number.

Page Call Transfer.

TRANSFER XXXX X

Transferring station number.

TRANSFER 3

Transferring page call to another station.

T/R VOL. SMALL/LARGE

Transmission Receiving Volume status.

V

VOICE XXXX

Voice Call showing called or calling station number.

VOICE BUSY/REST

Voice Call station called is busy or restricted.

W

WAIT P-RLS?

Prompt when requesting privacy release at another station.

FACE LAYOUT



1 CALL INDICATOR LAMP

Lamp at top corner of Dterm Display flashes when a call terminates to the terminal. Lamp lights steadily when a message has been left.

2 LCD(NOTE 1)

Liquid Crystal Diode (LCD) display provides Dterm activity information plus date, time and Soft Key Operation. The LCD display has 24-character, 3-line capability.

3 EXIT

The user can escape from the Help key mode by pressing this key.

4 SOFT KEYS

Any feature shown at the bottom of the LCD display is available. The appropriate feature key is displayed on the screen according to the call handling process.

5 HELP

Explanations of the Soft Keys can be called up on the LCD display by pressing this key.

6 PROGRAMMABLE KEYS

[Programmable by telephone system administrator (Flexible Line/Feature Keys)]

- Station line access
- Trunk line access
- Feature access

[Programmable by user (Flexible Line/One-Touch Speed Dial)]

<Flexible Line>

- Station line access

- Trunk line access
- Feature access
- <One-Touch Speed Dial> (Note 2)
- Any feature can be assigned.
- Direct station selection
- Station speed dial

7 RECALL

Press key to terminate established call and return to the internal dial tone.

8 FEATURE

Used to activate terminal setup functions and to program One-Touch Speed Dial/Feature Keys.

9 DIRECTORY (NOTE 3)

Press key to activate speed calling – system feature.

10 MESSAGE (NOTE 3)

Press key to access the voice mail system.

11 MIC

Press key to respond hands free. LED on this key lights during speakerphone operation.

12 CONF

Press key to establish a three-way conversation. LED on key lights when key is active.

13 LNR/SPD (LAST NUMBER CALL/SPEED CALLING)

Press key to activate redial feature. Press redial and scroll back through numbers that have been dialed until the desired number is displayed. Press the * or # (Note 4) key to activate dialing.

14 MICROPHONE

Built-in microphone is used for hands free operation with speakerphone.

15 UP/DOWN

(▼ DOWN ▲ UP)

Used to adjust LCD contrast, speaker/receiver volume, and ringer volume.

- LCD Contrast:
Press (▼) or (▲) key while idle.
- Speaker/Receiver Volume:
Press (▼) or (▲) key during conversation.
- Ringer Volume:
Press (▼) or (▲) key during ringing.

16 ANSWER

When LED on this key is lighted, press key to answer a waiting call.

17 SPEAKER

Controls the built-in speaker which can be used for Hands-free dialing/monitoring. LED on key lights when key is active.

18 TRANSFER

Allows the station user to transfer established calls to another station, without attendant assistance.

19 HOLD

Press key to place an internal or external call on hold.

20 DTERM IP ADAPTER

Dterm IP adapter can be attached to Dterm Series i 8D/16D/32D terminals. It supports the same telephony service as the original Dterm terminal.

Note 1: Not applicable for Dterm 8.


Note 2: Not applicable for Dterm 8/8D/16D.

Note 3: Not available for Dterm 65/Dterm Series III and Dterm 75/Dterm Series E mode.


Dterm Series III/Dterm Series E: North America
Dterm 65/Dterm 75: Australia, Asia, Latin America, Middle East, Russia

Note 4: A-law Countries: #
μ-law Countries: *
(USA uses μ-law)


DTERM 16D (16-LINE WITH DISPLAY)

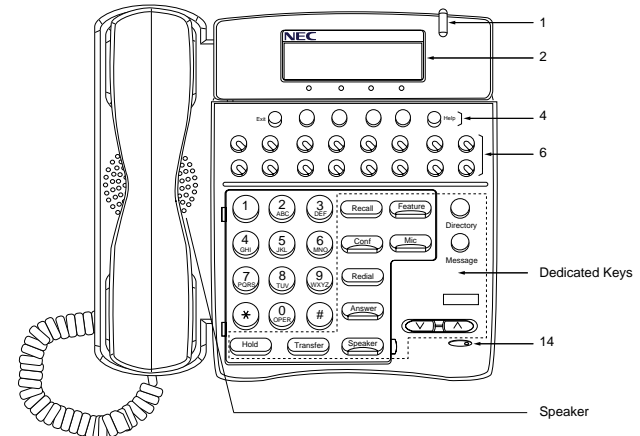


DTERM 32D (32-LINE WITH DISPLAY)

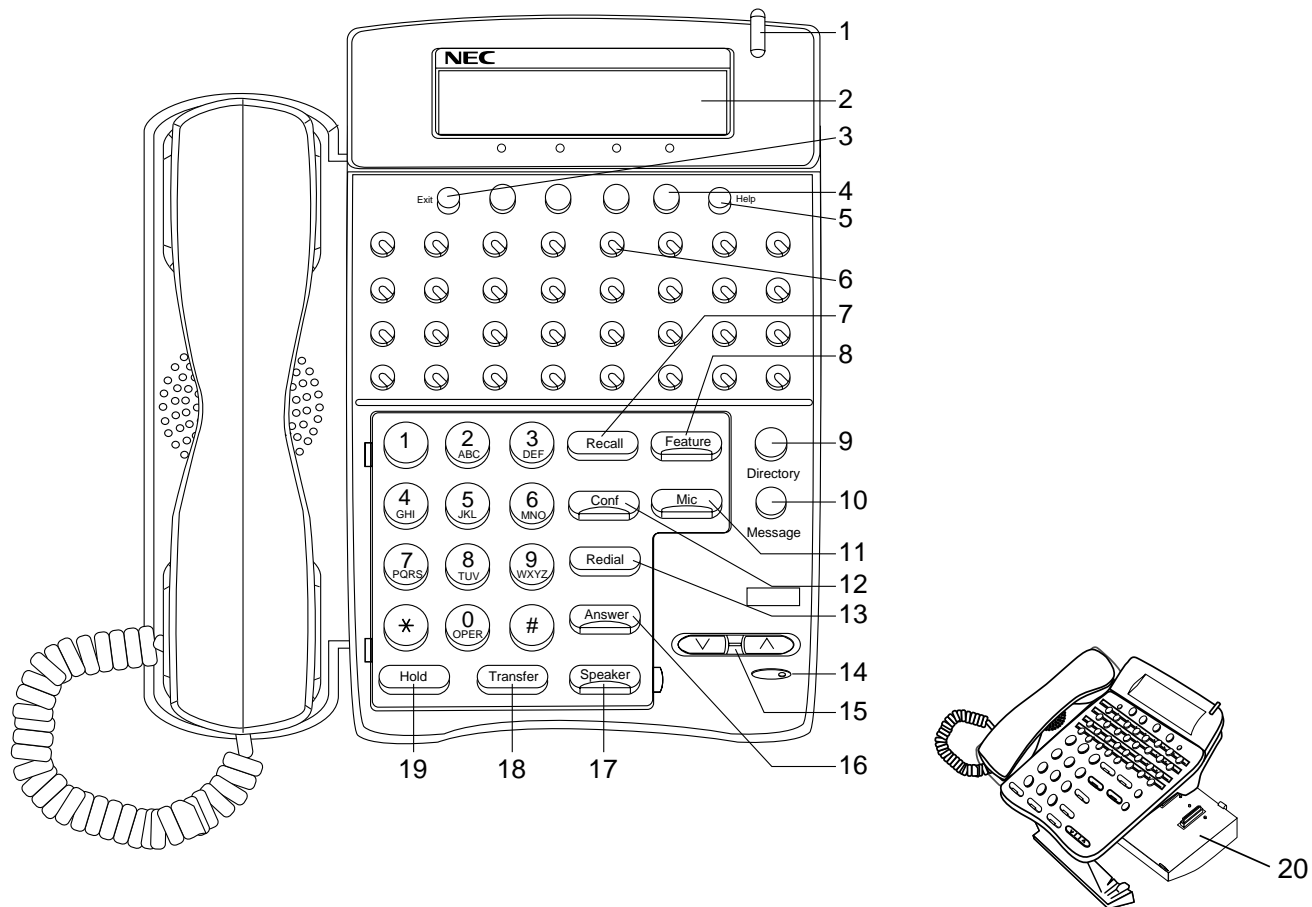


DTERM8 (8-LINE NON DISPLAY)

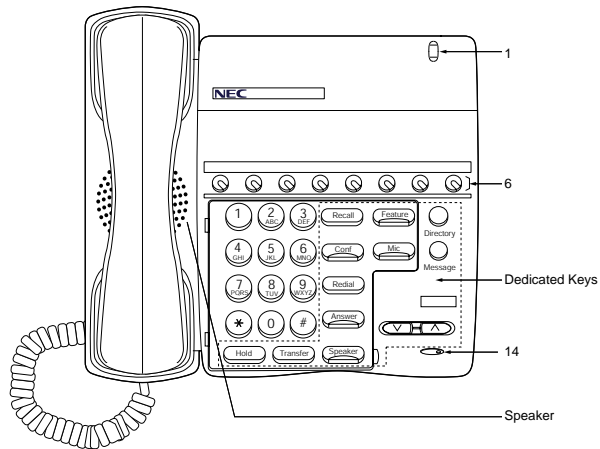

DTERM8D (8-LINE WITH DISPLAY)

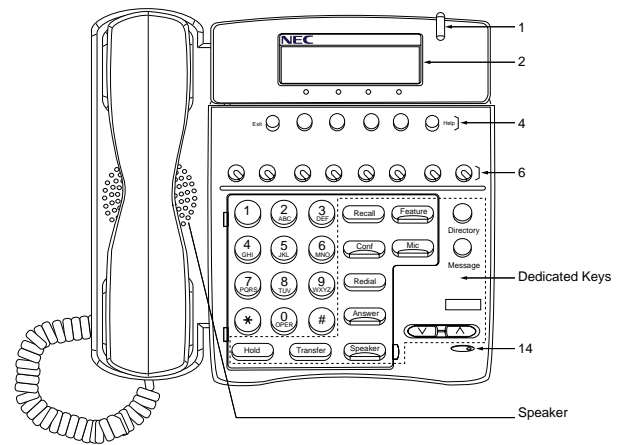

For more information contact:



©NEC America, Inc. 2003
NEAX and Dterm are registered trademarks of
NEC Corporation.

NEC America, Inc.
Corporate Networks Group
6555 N. State Highway 161
Irving Texas 75039
Visit our Web site at www.cng.nec.com

FPO BAR CODE

188301

Empowered by Innovation

NEC

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>