



PPHP803MU



PPHP103MU



PPHP123MU



PPHP153MU

2-Way PA Speaker System with Aux-in & USB/SD Card Readers

USER'S MANUAL

www.pyleaudio.com

Before using your new Speaker System Please review the following instructions, for the safety and investment.

INSTRUCTIONS

Before connecting the speaker, make sure the system is off and the controls on the minimum level. On the contrary the system could damage

- 1.Plug the power cable to the AC outlet and to the system and the speaker
- 2.Plug the microphone in the "MIC" input
- 3.Connect (CD, DECK, MP3, DVD, etc) on "LINE IN" input
- 4.Turn on the systems. A green LED will light up to indicate the speaker is on
- 5.Set the volume on the low level on the MIC and the LINE IN input
- 6.Increase the master volume (place on the right side of the LINE OUT *connector)
- 7.Set TREBLE and BASS controls to equalize the sound
- 8.A red LED will light up when the system detects overload power. You will must decrease the volume.

CAUTIONS

Do not place the microphone against the speaker, it can cause feedback echo and it will damage the system

SPECIFICATIONS:

| | PPHP803MU | PPHP103MU | PPHP123MU | PPHP153MU |
|--------------------|-------------|-------------|-------------|-------------|
| Woofers | | | | |
| Impedance | 4ohms | 4ohms | 4ohms | 4ohms |
| Sensitivity | 93dB/m/w | 94dB/m/w | 95dB/m/w | 97dB/m/w |
| Freq.Resp | 40Hz-20KHz | 40Hz-20KHz | 30Hz-22KHz | 30Hz-22KHz |
| Diameter | 8" | 10" | 12" | 15" |
| Coil Diameter | 1.5" | 2" | 2.5" | 3" |
| Magnet | 30oz | 40oz | 50oz | 60oz |
| Tweeter | | | | |
| Impedance | 8ohms | 8ohms | 8ohms | 8ohms |
| Sensitivity | 100dB/m/w | 100dB/m/w | 100dB/m/w | 100dB/m/w |
| Freq.Resp | 800Hz-20KHz | 800Hz-20KHz | 800Hz-20KHz | 800Hz-20KHz |
| Coil Diameter | 1" | 1" | 1.34" | 1.75" |
| Magnet | 12oz | 12oz | 13.5oz | 23oz |
| Built-in Amplifier | Yes | Yes | Yes | Yes |

Electrical safety

All products are fitted with a detachable power cord (supplied) which connects to the AC mains and the back panel of the loudspeaker. The power cord has an IEC female connector on one end and male mains connectors on the other end. This cord is supplied specially to accommodate the different worldwide safety and electrical code requirements. The power cord supplied with your product has a 3-pin type plug. Do not cut off or damage the grounding plug. Like any electrical appliance, your EON powered speakers should not be used in water or when wet.

Product design and specifications are subject to change without previous notice.

FEATURES

PPHP803MU

600Watts Powered Two-WAY PA Speaker

- 8" Woofer
- compression Driver with 1 " Titanium Diaphragm
- 1/4 "Mic Inputs
- stereo RCA Line Input
- 1/4 " Line Outputs
- Master Volume,Mic Level
- Player MP3 USB Stick
- 3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
- Frequency Response:45Hz-20KHz
- Power Output:300Watts RMS, 600Watts Peak
- Crossover Frequency:3.0KHz
- Integrated 35mm Speaker stand Mount
- Dimensions:11.8"WX9.8"DX17.3"H

PPHP103MU

800Watts Powered Two-WAY PA Speaker

- 10" Woofer
- compression Driver with 1 " Titanium Diaphragm
- Full Featured 3 Channel Mixer
- XLR and 1/4" Mic Inputs
- XLR & stereo RCA Line Input
- 1/4" Line Outputs
- Master Volume,Treble,and Bass Controls, Mic Level and Line Level
- Player MP3 From SD Card / USB Stick
- 3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
- Frequency Response:45Hz-20KHz
- Power Output:400Watts RMS, 800Watts Peak
- Crossover Frequency:3.0KHz
- 110/220 Voltage Selectable
- Integrated 35mm Speaker stand Mount
- Dimensions:14.1"WX11.4"DX21.2"H

PPHP123MU


1000Watts Powered Two-WAY PA Speaker

- 12" Woofer
- compression Driver with 1.34 " Titanium Diaphragm
- Full Featured 3 Channel Mixer
- XLR and 1/4" Mic Inputs
- XLR & stereo RCA Line Input
- XLR & 1/4" Line Outputs
- Master Volume,Treble,and Bass Controls,MP3 Control, Mic Level and Line Level
- Player MP3 From SD Card / USB Stick
- 3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
- Frequency Response:30Hz-22KHz
- Power Output:500Watts RMS, 1000Watts Peak
- Crossover Frequency:2.2KHz
- 110/220 Voltage Selectable
- Integrated 35mm Speaker stand Mount
- Dimensions:16.5"WX13.7"DX25.1"H

PPHP153MU

1200Watts Powered Two-WAY PA Speaker

- 15" Woofer
- compression Driver with 1.75" Titanium Diaphragm
- Full Featured 3 Channel Mixer
- XLR and 1/4" Mic Inputs
- XLR & stereo RCA Line Input
- XLR & 1/4" Line Outputs
- Master Volume,Treble,and Bass Controls,MP3 Control, Mic Level and Line Level
- Player MP3 From SD Card / USB Stick
- 3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
- Frequency Response:30Hz-22KHz
- Power Output:600Watts RMS, 1200Watts Peak
- Crossover Frequency:2.2KHz
- 110/220 Voltage Selectable
- Integrated 35mm Speaker stand Mount
- Dimensions:19"WX15.7"DX29.1"H

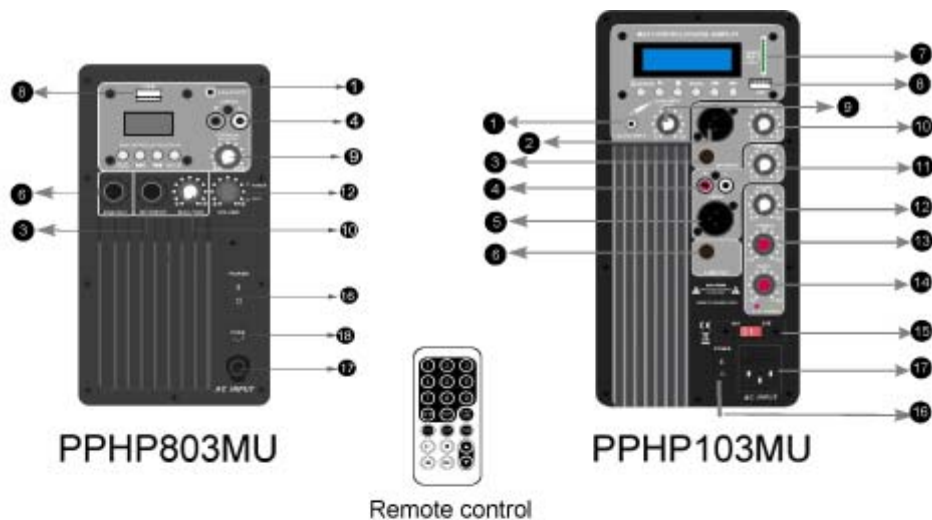

1. iPhone input
Allows you to connect an iPhone with a 3.5mm connector.
2. Balanced Microphone Input
Connector for a balanced microphone input.
3. Microphone input
Allows you to connect a microphone with a 6.3mm connector.
4. RCA Line-In
Allows you to connect an external audio device (CD, radio / DVD, etc) with RCA connectors
5. XLR Line-In
Allows you to connect an external audio device (CD, radio / DVD, etc) with XLR connectors
6. Signal output
Use 6.35mm jack to connect amplifier or even another powered speaker cabinet in cascade using a XLR connector
- 7/8. SD card /USB
9. MP3/ iPhone Volume control
Set the MP3/ iPhone volume level
10. Mic volume control
Use this control to set the volume level of Microphone
11. Line-In signal volume control
Use this control to set the volume level of the Line-In signal
12. Volume control
Set the volume level
13. Treble
Use it to set the treble level
14. Bass
Use it to set the bass level
15. AC 110/220 Voltage Selectable
16. On/Off Power Switch
Press to power on/off the speak box
17. AC power
To connect the AC power cord
18. Fuse



1. iPhone input
Allows you to connect an iPhone with a 3.5mm connector.
2. Balanced Microphone Input
Connector for a balanced microphone input.
3. Microphone input
Allows you to connect a microphone with a 6.3mm connector.
4. RCA Line-In
Allows you to connect an external audio device (CD, radio / DVD, etc) with RCA connectors
5. XLR Line-In
Allows you to connect an external audio device (CD, radio / DVD, etc) with XLR connectors
- 6/7. Signal output
Use 6.35mm jack to connect amplifier or even another powered speaker cabinet in cascade using a XLR connector
- 8/9. SD card / USB
10. MP3/ iPhone Volume control
Set the MP3/ iPhone volume level
11. Mic volume control
Use this control to set the volume level of Microphone
12. Line-In signal volume control
Use this control to set the volume level of the Line-In signal
13. Volume control
Set the volume level
14. Treble
Use it to set the treble level
15. Bass
Use it to set the bass level
16. AC 110/220 Voltage Selectable
17. On/Off Power Switch
Press to power on/off the speak box
18. AC power
To connect the AC power cord

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>