

Stealthbox®

INSTALLATION GUIDE for the SB-F-TRKEXT/8W1 (1997-1999 F-150 SuperCab)



This Stealthbox is a product which requires professional installation skills and tools.

Please read this installation guide thoroughly before beginning the project. It will guide you step by step through the installation. Several of the steps in this process may require two people to accomplish.


It is absolutely vital that the enclosure be properly mounted to the vehicle according to these instructions. Failure to mount the enclosure properly presents two problems: 1) The sub-bass performance will suffer due to the movement of the enclosure caused by the force exerted by the woofer(s) and 2) A loose enclosure presents a serious safety hazard in the event of a collision or sudden deceleration.

Please enjoy your JL Audio Stealthbox responsibly.

JL AUDIO®
Ahead of the Curve™


www.jlaudio.com

**START
HERE**

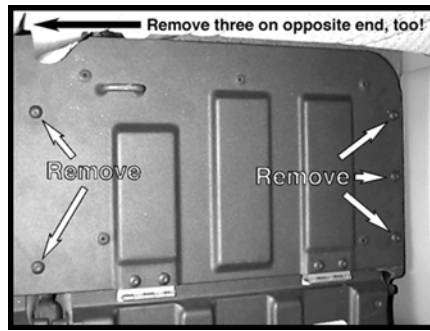

STEP 1: Flip the rear seat up, this will expose the metal plate that needs to be removed.


With a T-30 socket, remove the 8 factory bolts.

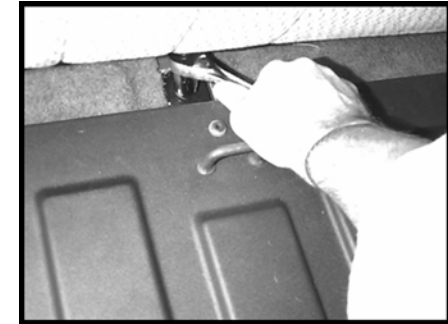

STEP 2: Remove the two bolts that secure the panel to the rear of the cab, with a 18mm socket.



STEP 3: With all the mounting bolts removed, remove the rear seat.

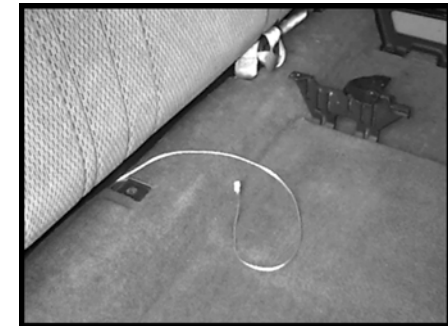


STEP 4: Run speaker wire to the enclosure location. At this time, check the woofers for proper operation.

Attach the speaker wire to the enclosure terminal
Place the enclosure on the rear passenger's side rear floor.

Continued on Next Page →

Cont. From Previous Page

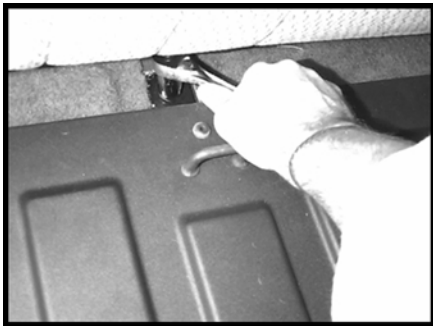

**CONGRATULATIONS!
INSTALL COMPLETE.**

STEP 5: Place the rear seat back into the truck. Start securing the plate by bolting in the two bolts that were removed in **STEP 2**.

STEP 6: Replace and secure all eight T-30 bolts, that were removed in **STEP 1**.

STEP 7: Fold the rear seat cushion back down.

Included Hardware:
A whole lot of nothing, don't look for it. No, you didn't throw it away and no we didn't forget it.


Difficulty Of Installation:



Specifications:

- Enclosure Type:** Sealed
- Driver Type:** 2) 8W1
- Nominal Impedance:** 4Ω
- Cont. Power Handling:** 150Watts

JL Audio recommends using a high quality amplifier such as the JL Audio e-2150. The diagram below shows the recommended crossover and equalizer settings for the e2150 when being used to power your Stealthbox®.

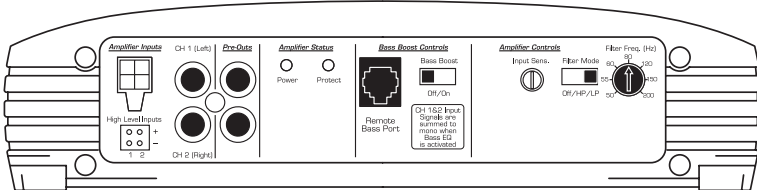

The JL Audio e2150 is a very versatile audio component. Please consult the owner's manual for detailed information about installing and tuning this amplifier.

Mid/High Frequency Driver Information:

Front Location Driver Size:
5"x7" / 6"x8"

Applicable JL Audio Products:
TR, XR CSI/CXi & ZR570-CSi



Rear Location Driver Size:
5"x7" / 6"x8"

Applicable JL Audio Products:
TR & XR 570-CXi



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>