


Features



- Can accommodate most manufacturers light or occupancy sensor switch.
- Line or low voltage.
- Fits standard or slot grid ceiling systems.
- Plug-in connection to mating fixture (ordered separately).
- Secures to ceiling "T" (Standard or Slot Grid).
- Ceiling tile hold-down.
- 18 gauge steel fascia.
- Mates with 2' x 2' and 2' x 4' recessed fixture products:

Alter Classic (QVS)	Paralyte (PL)
Alter High Efficiency (QHE)	Paraplus (PP)
Alter Louver (QVS-LV)	Prismalyte (PL)
Coffaire (CF)	Sidelyte (SM)
Deepcel (DP)	Specplus (SP)
HP90 (HP)	Video Tele-Conference (VT)
Mini-Beam (MB)	Vision Smart 2' x 2' (VP/VR)
Mini-Beam HP (MB)	Vision Smart 2' x 4' (VP/VR)
Parabaffle (MP)	

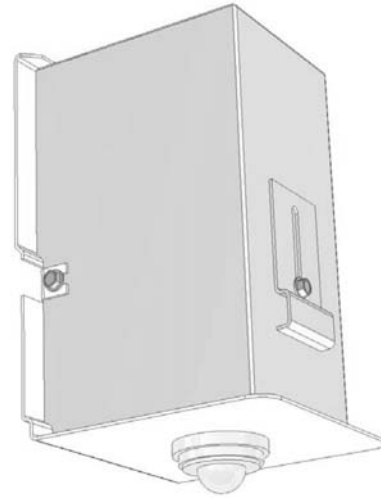


patent pending

Mounting Methods

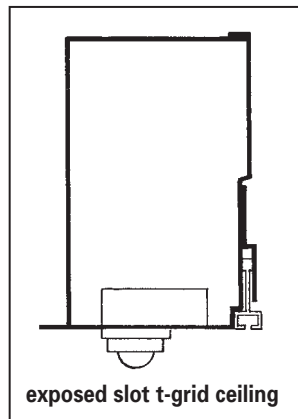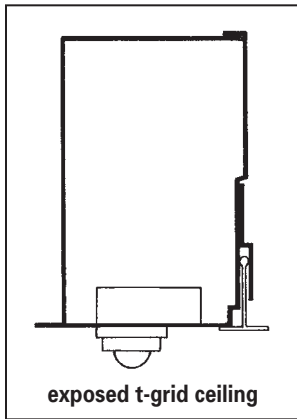


Dimensions

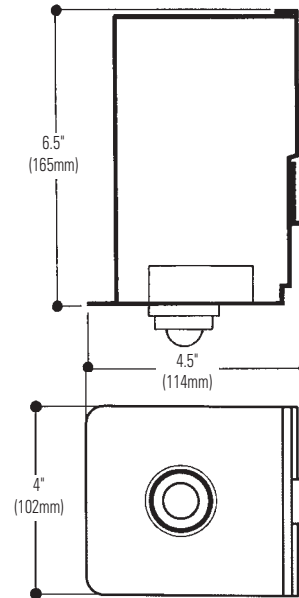


Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Volts/Ballast:	


Lightolier a Genlyte company www.lightolier.com
 Technical Information: (978) 657-7600 • Fax (978) 658-0595
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2006 a Genlyte company **Options/Accessories Folio OA20-10**

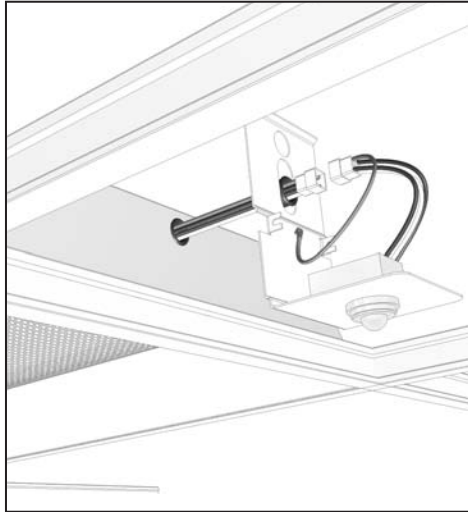

plug-in connection

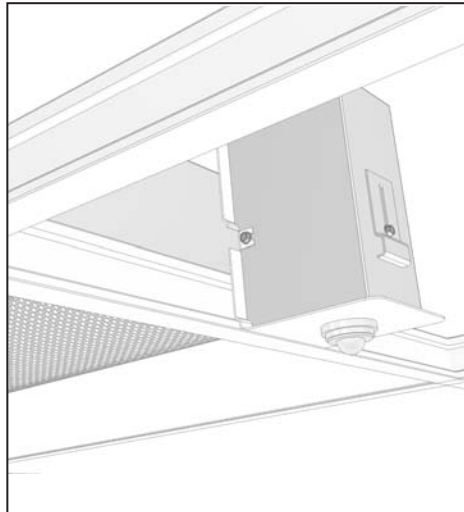

mates with 2' x 2' / 2' x 4' recessed fixtures

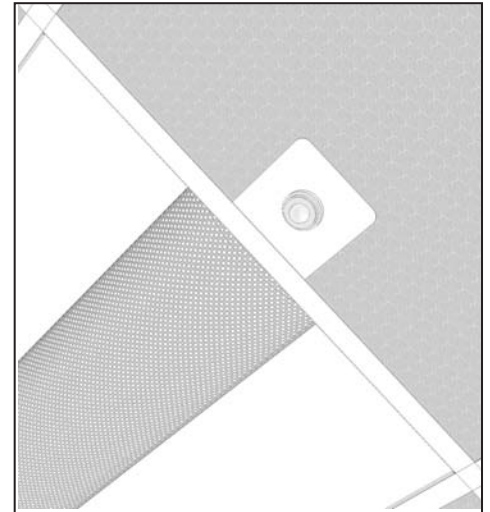

completed installation

The ULM Module is an enclosure that will accommodate most manufacturers motion or daylight sensors in either line or low voltage. It is designed to interface and quick connect to most of our 2x4 and 2x2 recessed lighting fixtures.


The ULM Module creates the convenience of being able to build a motion or daylight sensor (produced by others) into any of our recessed fixtures eliminating the potential errors in how the sensors and fixtures are electrically connected.

NOTE:

Fixtures and ULM Modules are ordered as separate items. Sensors used and wiring of fixtures will be based on information provided by specifier.

Ordering Information

Ordering Information Explanation of Catalog Number: UL2F-WS1

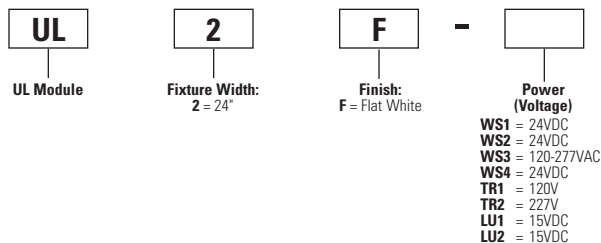

Catalog No.	Part No.	Manufacturer	Power
UL2F-TR1	DSI Smart 120V	Tridonic	120V
UL2F-TR2	DSI Smart 277V		277V
UL2F-WS1	FS205	Watt Stopper	24VDC
UL2F-WS2	FS305		24VDC
UL2F-WS3	FS255		120-277VAC
UL2F-WS4	FS405		24VDC
UL2F-LU1	C-R-M1-WH	Lutron	15VDC
UL2F-LU2	C-SR-M1-WH		15VDC

NOTE: Contact Sensor Manufacturer for additional information. Contact factory (LOL) for other sensors you may want to use.

Specifications

Materials: 18 gauge cold rolled steel fascia.

Finish: Flat white.

Housing: 24 gauge galvanized steel.

Labels: I.B.E.W.

Job Information **Type:**

Lightolier a Genlyte company www.lightolier.com
 Technical Information: (978) 657-7600 • Fax (978) 658-0595
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2006 a Genlyte company **Options/Accessories Folio OA20-10**

LIGHTOLIER®

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>