

# BATTERY CHARGER CH08


## Features:

- For charging of the batteries of the control box CB08-XA, directly connected to the control box or via the handset HB40A.
- For charging CB7 directly or charging the BA18 via a CB7 system
- For charging of the batteries in battery box BAJ2 (JUMBO system)
- Mains: 240V/230V/120V/100V/50-60 Hz
- Charging voltage: 27.6 V DC  $\pm$  2%
- Charging current. Max. 300 mA
- Colour: Black
- Cable: 2000 mm with DC-plug (5.0 x 2.5)

Order number: CH08 + specification of mains voltage and type of main plug:

240V/50 Hz: English plug  
240V/50 Hz: Australian plug  
230V/50 Hz: Euro plug  
100V/50 Hz: Japanese plug  
120V/60 Hz: American/UL plug

- Approved according to VDE 0750

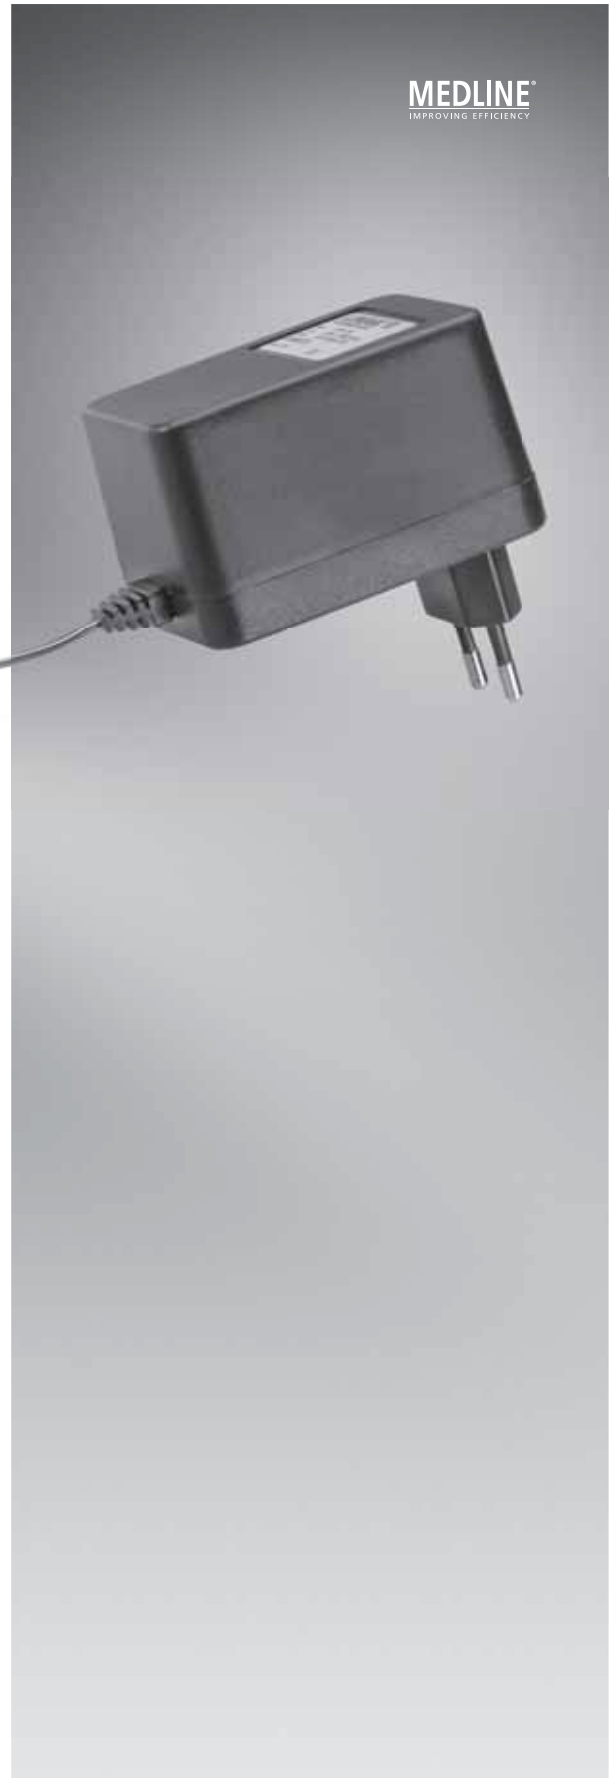



Please be aware that CH08 is not approved for use in the patient area.

---

Specifications subject to change without prior notice.  
It is the responsibility of the product user to determine the suitability of LINAK A/S products for a specific application. LINAK will at point of delivery replace/repair defective products covered by the warranty if promptly returned to the factory. No liability is assumed beyond such replacement/repair.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>