

# 16x16 Analog Video Only Router

## Model 860-XL1616A



16X16 VIDEO, NO AUDIO FOLLOW

- ◆ 16 x16, Digital, Video Only
- ◆ Local or Remote Control Panel
- ◆ AFV, breakaway, or X-Y Control
- ◆ Maximum of 256 Remote Panels
- ◆ RS-232 Serial Control, Standard

The 800 Series Routing Switchers are wide bandwidth vertical interval switchers designed for professional video production facilities. The compact design of Link's routing switchers makes them an essential part of any facility.

Packaged in a 19" rack mountable chassis, the switchers are supplied with a single front-loaded power supply. An optional redundant power supply is available. High quality front panel push buttons are used for selection of inputs and outputs.

Remote control panels are interconnected with standard Ethernet 10Base2 single coax connections. RS-232 is provided through a standard D-sub connector. Panels can be set to control a single output bus or the entire matrix. The router is supplied with the control panel with audio break-away.

The Link Switcher's flexibility is unmatched in the industry. Modular construction offers unique flexibility to the user, and provides an easy means of adding additional features or upgrading to digital modules. Power supplies are accessible from the front of the unit and may be easily installed or removed. Analog switchers can easily be upgraded to digital by adding field installable modules.

Industry standard BNC connectors are used for video inputs and removable 3-Pin connectors are used for stereo audio inputs and outputs.

Routers are available for analog video only, analog video with stereo audio follow, digital video only, and digital video with two-stream AES/EBU audio follow. SUPPLIED WITH CONTROL PANEL WITH AUDIO BREAK-AWAY

The Link 16 x16 routing system features:

- Modular Design – plug-in modules for video & audio. No active components on the frame.
- Two power supply slots are accessible from the front panel. One power supply is standard.
- A redundant power supply is available as an option.
- Detachable X-Y front panel control with Ethernet 10Base2 coax connection.
- Analog video only models and models with audio follow video.
- Digital video only models and models with analog audio follow.
- Digital video only models and models with digital audio follow.
- RS-232 control standard.
- The 16X16 Video switcher is in a 1 RU and the audio follow in a 1 RU

### Remote Mounting Kits for Control Panels

The supplied control panel for all switchers is shipped installed into the front of the main electronics chassis. The control panel can be removed from the electronics chassis in the field and installed into a remote mounting kit. The mounting kit hardware includes rack-mounting hardware for the control panel, a blank panel(s) that is installed onto the front of the electronics chassis, and a power supply. Order the appropriate rack mounting kit from the list below:

- |                    |   |          |
|--------------------|---|----------|
| <b>860-XL1616A</b> | 16 x16 Analog Video Only Routing Switcher                           | One Rack |
| <b>860-XL1616C</b> | 16 x16 Analog Video Routing Switcher with Stereo Audio Follow Video | One Rack |

# 16 x 16 Routing Switching Systems

## MODEL 860-XL1616A

### SDI VIDEO INPUT:

Number: ..... 16  
Video Level: ..... 800mV  
Impedance: ..... 75 $\Omega$  Looping  
Coupling: ..... DC  
Connector: ..... BNC  
Return Loss: ..... 40 dB @ 3.58 or 4.43 MHz

### COMPOSITE VIDEO OUTPUTS:


Number: ..... 16  
Connector: ..... BNC  
Level: ..... Unity Gain,  $\pm 0.1$  dB  
Character Video: ..... 90 IRE Units  
Return Loss: ..... 35 dB @ 3.58 or 4.43 MHz  
Character Background: ..... 10 IRE Units  
Impedance: ..... 75 $\Omega$   $\pm 1\%$   
Vertical Interval Switching: ..... Line 6, NTSC  
Frequency Response: .....  $\pm 0.1$  dB to 5MHz  
..... -3.0dB to 50MHz  
Differential Gain: ..... 0.10%, 10% to 90% APL  
Differential Phase: ..... 0.10°, 10% to 90% APL  
Crosstalk: ..... 62dB to 5 MHz, worse case  
Propagation Delay: ..... 5 nS, typical  
Hum and Noise: ..... >60dB to 5 Hz  
DC Offset: ..... <25mV  
Line Rate Tilt: ..... <0.1%  
Field Rate Tilt: ..... <0.1%  
SNR: ..... -73dB

### ENVIRONMENTAL:

Temperature: ..... 0° to 50° C ambient  
Humidity: ..... 10%/90% non-condensing  
Power: ..... 9.5 VAR  
AC Voltage: ..... 120/240 VAC  $\pm 10\%$ , 50/60Hz

### MECHANICAL:

Height: ..... 1.75 inches  
Width: ..... 19 inches  
Depth: ..... 9.25 inches  
Weight: ..... 9lbs

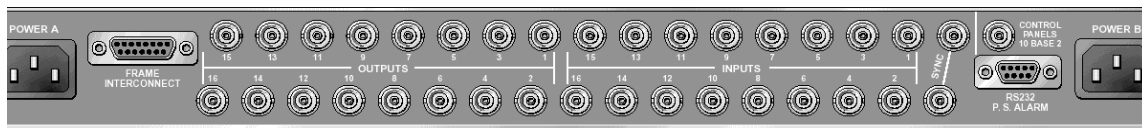

VIDEO ROUTER REAR VIEW

**LINK** ELECTRONICS, INC. 2137 Rust Avenue Cape Girardeau, MO 63703-7668  
Phone 573 334 4433 FAX 573 334 9255

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>