

Getting to know your Alcatel 4073 GS Smart telephone

Navigator:
Allows you to move through the menus and to confirm entries:

- Display previous choice. Erase last character entered.
- Display next in list. Transfer (long press).
- Validate entry.
- Scroll the display pages.

Initiate a call by name/Personal directory

Function keys:
The function is obtained by a long press on the key (2 beeps).

- Sending DTMF codes (long press).
- Customizing your telephone.
- R: send timed break (long press).
- Adjusting your telephone (long press).
- Activating vibrate mode while deactivating the ringer, or vice-versa (long press).
- Message function. Forward function (long press).
- On-Off (long press).
- During a call: adjusting earpiece sound volume.



Green light indicating:
Incoming call: flashes with call ringing if ringer and vibrate mode are deactivated.
Going out of radio coverage: fast flashing.

Display and corresponding icons:
Has 2 lines of 16 alphanumeric characters and 1 line of 8 icons.

Radio reception icon (1):

- Limit of coverage or outside coverage (flashing). Poor reception (light on).
- Reception OK (light on).

Battery icon (1):

- Battery discharged or defective (flashing).
- Battery on charge (flashing).
- Battery fully charged (light on).

Option icons (4):

- Lock/unlock.
- Message.
- Forward.
- Ringer disabled.

Call keys:

- Off hook. Redial function (long press).
- Hang up.

GETTING STARTED

Installing the battery in the telephone

remove the cover connect the battery socket position the two wires under the battery and slide the battery into position click the cover into position

Check correct polarity: red wire towards inside of telephone

Switching on your telephone:

long press → display comes on → wait a moment (= 3 sec.) → battery and radio coverage icons light up → your telephone is switched on

Conversely, if the display does not come on, charge the battery.

If you are outside radio coverage, the radio coverage icon flashes. If "AUTO-INSTALL, System 1 - OK?", is displayed, see paragraph "Registering your telephone in the system".

Switching off your telephone:


long press

SETTING UP

Selecting language


short press → 5 JKL / 4 GHI → you have the choice of 4 predefined languages

Selecting language (cont.)

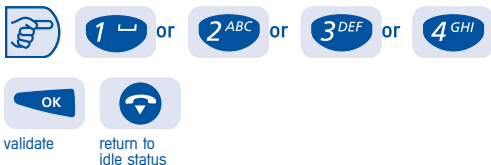

Adjusting the audio functions

When your telephone is in standby, you can customize some of its functions:

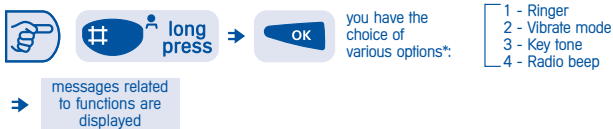

* to select the option

For each function, transition between "active" mode and "inactive" mode (and vice-versa) is obtained by:



Example:



When the selection is completed:



Adjusting your ringer

You can select your ringer tune (choice of 7) and adjust the volume (3 levels):



To play the various ringer tunes proposed:



Adjusting ringer volume:




Selecting your receiver sound volume



A beep indicates maximum volume selected.
The last adjustment entered is retained for the next call.

USING YOUR TELEPHONE

Making a call

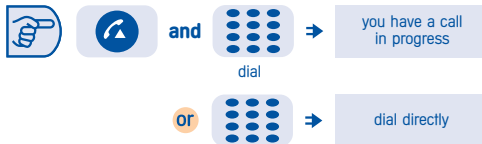

Answering a call:



To terminate a call:




Calling your correspondent by name (company directory)



When name is found:



Calling from your personal directory

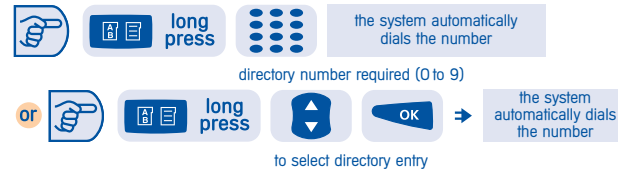

Calling from the common directory

Your terminal has access to the common directory of short outside numbers:



Redialling the last number dialled (redial)



Requesting automatic callback

Internal extension busy



After busy extension, hangs up. Callback recall is received.






HANDLING SEVERAL CALLS

Making a second call during a conversation

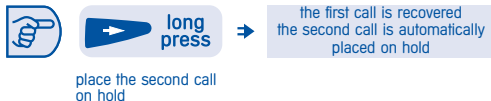

Recovering the first call:



If you make a mistake, hang up . Your telephone rings and you recover your first call by pressing .

Answering a second call during a conversation




→ the first call is placed on hold

Recovering the first call:



Transferring a call

To transfer your call to another number:

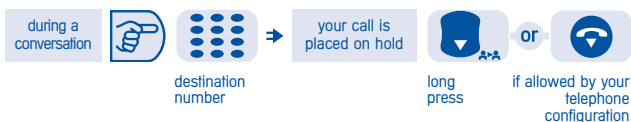

Switching between calls (Broker call)

During a call, a second call is on hold. To switch between the two calls:



Three-way conference with internal and/or external correspondents (conference)

During a conversation, another call is on hold:

For a three-way conference:



To hang up calls:



Cancelling the conference and recovering your first call:



CUSTOMIZING YOUR TELEPHONE

Programming your personal directory

Your directory can contain up to 10 numbers, which you can enter through the numeric keypad (keys 0 to 9).




1 - Programming a number (first time)




Programming your personal directory (cont.)

2 - Modifying a number

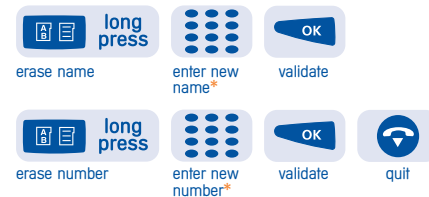

*Example: Enter a name.




Wait a short period and cursor would jump to a next position.

* Use the  keys to back space.


Charging your telephone battery

Connect the charger to a power supply (AC/DC transformer plugged into mains). Install the telephone in the charging holder and observe the battery icon.

Battery charge low (less than 5 %):



Battery charge at least 50 %:



Battery charge OK:



Install the telephone in its charging holder **regularly**.

Charging holder

The holder is an integral part of the charger used with this telephone. It is a convenient means of stowing the telephone while simultaneously charging the battery. The telephone can be "On" or "Off".

The holder comprises:

1. a position for the telephone,
2. a mains power connection cable, through and AC/DC transformer.

The mains power socket used must be close to the charger/holder and easily accessible, so that it can be used as an "on/off" facility.

The level of charge is shown on the telephone display (battery icon).

Registering your telephone in the system

To operate correctly, any DECT telephone needs to be registered in at least one system (subscription operation).

When using your 4073 GS Smart telephone for the first time, prepare your system for registration (see Office System Installation guide).

When the system is ready:



switch the telephone "On"



select system (1 to 3)

Two possibilities for "AC Code?"

■ if no system code:




■ if system code:



enter code

Subscription accepted:



max. 2 minutes

Subscription failure:



This may be because your system has not been prepared for the registration. Consult your installation technician.

Your telephone provides access to a number of functions, depending on your system version and configuration.

See the installation guide or contact your installation technician.

Alcatel Business Systems, in keeping with its policy of constant product improvement for the customer, reserves the right to modify product specifications without prior notice.

Alcatel Business Systems
56, avenue Jean-Jaurès
F-92707 Colombes Cedex
R.C. Paris 602 033 185

Ref.: 3AC 21260 AUAB Ed. 01

Grande Extême

ACCESSORIES

Case

Various models of carrying case are available. These cases provide effective protection against impact (being dropped), dust and liquids.

Carrying cases are strongly recommended in severe environments. For the characteristics of each model, contact your installation technician.



Remove the belt clip from your telephone to facilitate case insertion and removal.

Table of codes provided by Alcatel Office

Function	Default code	Your code
Answer general bell	*1	
Answer paging	#95	
Automatic callback if terminal busy	5	
Broker call	2	
Cancel all diversions	*00	
Cancel automatic callback	#99	
Common directory numbers	8000 to 8399	
Conference	3	
Divert group calls	#06	
Divert if busy	*02	
Divert to paging	*04	
Do not disturb	*05	
DTMF End to End	##	
Follow me diversion	*06	
Group call pick-up	*6	
Hunting group in	*4	
Hunting group out	#4	
Immediate diversion	*01	
Intrude on a call	4	
Locking/Unlocking	*3	
Paging	7	
Park/retrieve parked call	*7	
Protect a call	*98	
Redial last number	#1	
Selective diversion		
Terminal call pick-up	#6	
Text message (call back later)	*91	

QUICK GUIDE



ALCATEL

4073 GS Smart

mobile
telephone

DECT
DIGITAL

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>