


Fire Brigade Interface

FWI016-1

- **Relay output with dry changeover contact**
- **Line-monitored output with selectable surveillance current**
- **8 inputs and 7 outputs for control tasks**
- **Connection of country-specific fire brigade control units**

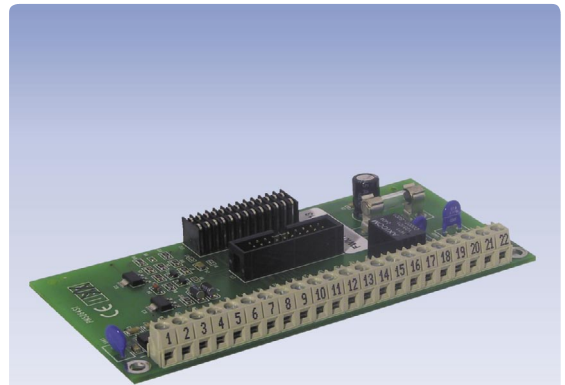

Description

The Fire Brigade Interface FWI016 allows for the connection of two independent transmitting devices for direct interconnection to a designated alarm respondent (e.g., the fire brigade) as well as the connection of a country specific fire brigade control unit to Fire Detection Control Panels Series BC016.

A dry contact and a line-monitored output are available for the connection of the transmitting devices.

The parameters of the eight inputs and seven outputs can also be freely set and thus are available for general control tasks.

Specifications

Current consumption at 24V	typ. 4mA
Contact rating of relay contact	60V/1A/30W
Contact life	approx. 300,000 switching cycles (at 24VDC/1A)
Ambient temperature	-5°C to +50°C
Dimensions L x W x H	130 x 65 x 15 (mm)
Weight	70g
Part No.	210111
Order name	Fire Brigade Interface FWI016-1



Building Safety. Building Security.

LST

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>