


Thermal Max Detector

HT-11002

- **Addressable conventional technology**
- **Alarm temperature 61°C**
- **Individual detector addressing by means of optional address module**
- **Optional connection of remote indicator**
- **Extremely flat design**
- **Sealed electronics**

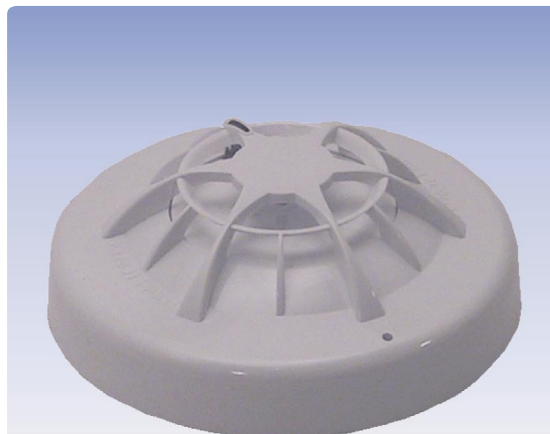

Description

The Thermal Max Detector HT-11002 recognises a maximum temperature of 61°C as sign of fire. It complies with Class A2S and can be used up to a room height of 6m.

Addressable conventional technology is used for alarm transmission to the fire detection control panel. By means of the optional Address Module NG60-1, each

detector can be addressed individually, thus allowing to display the detector address, as well as an assigned element text, on a suitable fire detection control panel.

A detector fault is indicated by a yellow flashing of the multicoloured status LED.

The detector can be attached to various bases and it can be protected against theft.

Specifications

Operating voltage	Supply through the detector line voltage
Current consumption	typ. 65µA (quiescent)
Alarm temperature	typ. 61°C
Operating temperature	max. +50°C
Ambient temperature	-40°C to +70°C (no condensation or icing)
Relative humidity	0 – 98% (no condensation)
Dimensions ø × H	100 × 36 (mm)
Colour	white
Weight	70g
Approval	VdS G204034
Order number	242031
Order name	Thermal Max Detector/Conv./ORBIS/Apo HT-11002



Building Safety. Building Security.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>