


Feature rich programmable/non-programmable all-in-one thermostat

7-day • 5/2-day  
Programmable • Non-Programmable

## Product Highlights

- ✓ All in-one programmable/non-programmable
- ✓ 2-heat/1-cool heating & AC
- ✓ Dual powered
- ✓ Adjustable heating and cooling limits
- ✓ 3 year warranty
- ✓ Adjustable 2nd stage heat offset

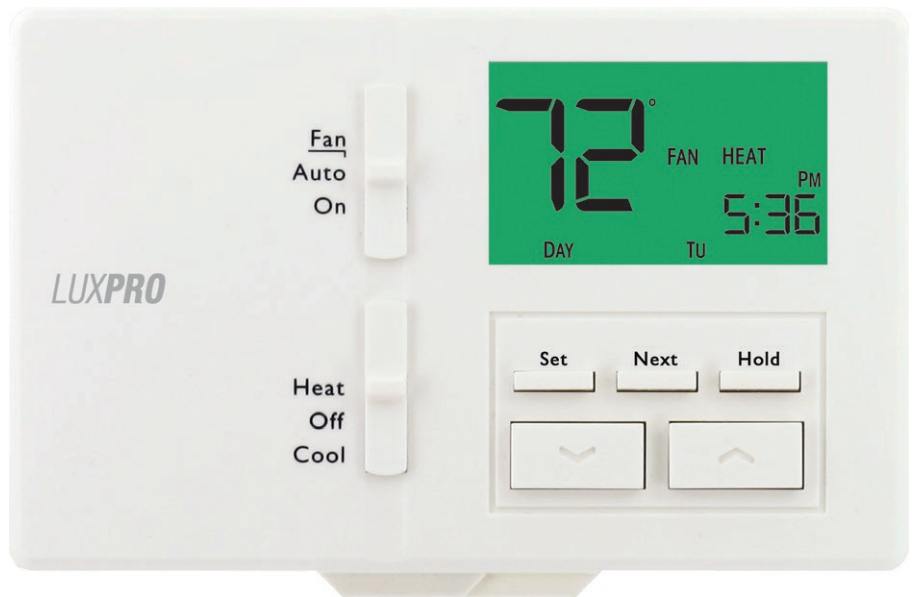

## Product Features

- Easy installation
- Program 7-day, 5/2-day, or non-programmable
- Easy-view back light
- Optional wall plate model #WP567
- User option: 2 or 4 periods per day
- Keypad lock for unauthorized use
- Temporary override and manual hold
- Dual powered (2AA) Alkaline Batteries (included)
- Temporary Compressor protection bypass
- 5/2 minute selectable time delay for equipment protection
- User temperature calibration
- Adjustable heating and cooling limits
- Display option: fahrenheit or celsius temperature
- Adjustable temperature differential/swing
- Conventional heat & heat pump

## Installation

### Compatible With


- For most 24V heating and A/C systems
- 2-heat/1-cool: gas, oil, or electric systems (Non-heat-pumps)
- 2-wire heat only hydronic systems (hot water baseboard & radiator)
- Millivolt systems (wall heaters/furnaces & gas fireplaces)

### Not Compatible With

- Heat pump systems
- 3-wire hydronic zone valve systems
- Line voltage systems (120/240 VAC)

# SPECIFICATIONS

MODEL# **P721**

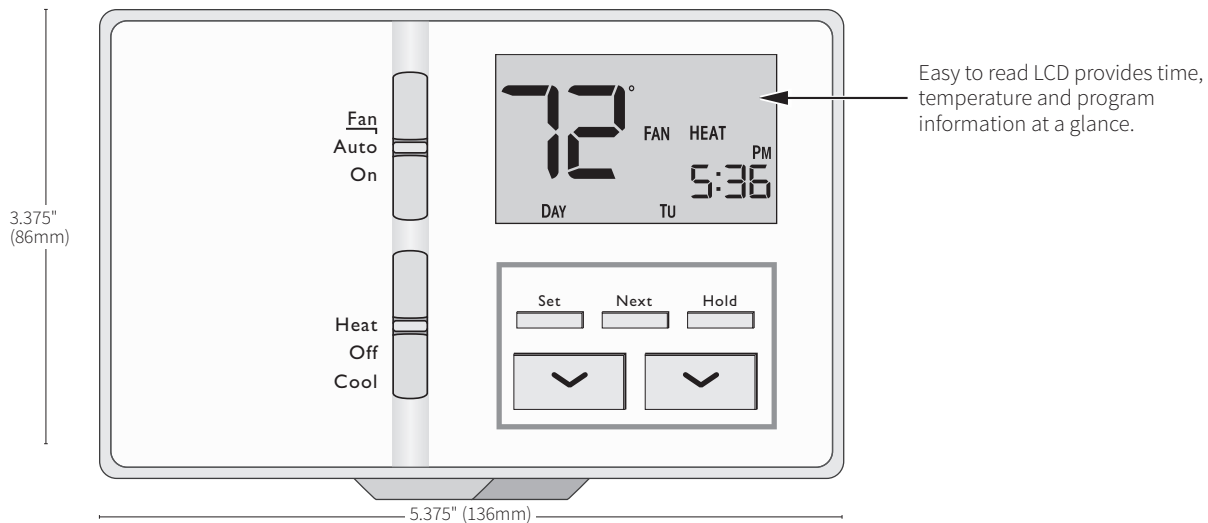

<b>Dimensions</b>	5.375" (136mm) wide x 3.375" (86mm) tall x 1.25" (32mm) deep
<b>Heat/Cool Terminals</b>	RH, RC, W, Y, G, C, W2 (solid pins for 24v and Millivolt systems)
<b>Electrical Ratings</b>	1.5 Amps per terminal at 24 volts
<b>Temperature Control Range</b>	<ul style="list-style-type: none"> <li>Temp control 45°F to 90°F (7°C to 32°C)</li> <li>Display range: 23°F to 99°F (-5°C to 37°C)</li> <li>Temperature Differential: adjustable from ±0.25°F to ±2.25°F</li> </ul> <i>Accuracy ±1°F over a range of 45°F to 90°F.</i>
<b>Environmental Limits</b>	<ul style="list-style-type: none"> <li>Moisture and Dust: meets IP20</li> <li>Operating Humidity: 20% to 90% (non-condensating)</li> <li>Operating temperature: 14°F to 114°F (-10°C to 45°C)</li> <li>Storage temperature: -4°F to 140°F (-20°C to 60°C)</li> <li>Electrical Immunity: meets relevant EMI/EMC specifications</li> </ul>
<b>Compatible With</b>	<ul style="list-style-type: none"> <li>For most 24V heating and A/C systems</li> <li>2-heat/1-cool: gas, oil, or electric systems (Non-heat-pumps)</li> <li>2-wire heat only hydronic systems (hot water baseboard &amp; radiator)</li> <li>Millivolt systems (wall heaters/furnaces &amp; gas fireplaces)</li> </ul>
<b>Not Compatible With</b>	<ul style="list-style-type: none"> <li>Heat pump systems</li> <li>3-wire hydronic zone valve systems</li> <li>Line voltage systems (120/240 VAC)</li> </ul>
<b>Packaging</b>	<ul style="list-style-type: none"> <li>Master Carton: 10 units</li> <li>UPC: 0 21079 14721 2</li> </ul>

Project Name \_\_\_\_\_

Date \_\_\_\_\_

Contractor / Engineer \_\_\_\_\_

Location \_\_\_\_\_



LuxProProducts.com

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>