

Screen 2P

Two-way passive system

cinema

features

- ▶ Two-way passive design
- ▶ Very shallow profile
- ▶ High SPL
- ▶ Low distortion

applications

- ▶ Behind screen placement
- ▶ For rooms up to 150 seats




The Screen 2P Cinema system has been developed to accommodate the various digital formats of modern films, providing the essentials of low distortion, wide bandwidth, with uniform coverage for the smaller room. This makes the Screen 2P ideally suited for small cinemas, preview theatres, screening rooms and post production suites.

A 1.2kHz internal passive crossover network ensures smooth transition between the LF and HF sections.

technical specifications

TYPE	Two-way passive screen system
DRIVERS	1 x 15" (380mm) low frequency 1 x 1" (25mm) exit HF compression driver
FREQUENCY RESPONSE (1)	45Hz-20kHz \pm 3dB
RATED POWER (2)	400W AES, 1600W peak
SENSITIVITY (3)	98dB
CROSSOVER	1.2kHz passive
IMPEDANCE	8 ohms
DISPERSION (-6dB)	90° horizontal, 90° vertical
DIMENSIONS	LF: (W) 650mm x (H) 765mm x (D) 307mm (W) 26ins x (H) 30ins x (D) 12ins HF: (W) 285mm x (H) 344mm x (D) 185mm (W) 11.2ins x (H) 13.5ins x (D) 7.3ins
INSTALLED DIMENSIONS	(W) 650mm x (H) 1080mm x (D) 350mm (W) 26ins x (H) 42.5ins x (D) 13.8ins
WEIGHT	LF: 40kg (88.2lbs) HF: 4.5kg (9.9lbs)

overall dimensions

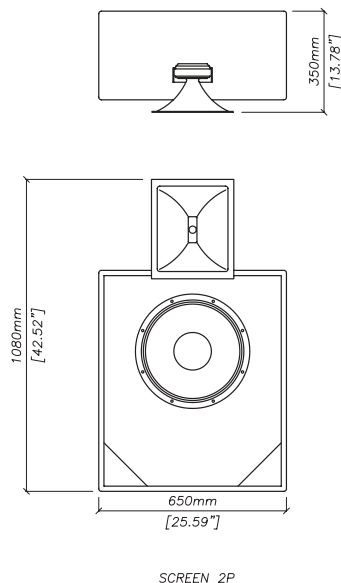

Century Point, Halifax Road, Cressex Business Park,
High Wycombe, Buckinghamshire HP12 3SL, England.
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669
E-mail: info@martin-audio.com
All information is Copyright © 2003 Martin Audio Ltd.



www.martin-audio.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>