


User Manual


GENERATR S100

MODEL:GN6001GY

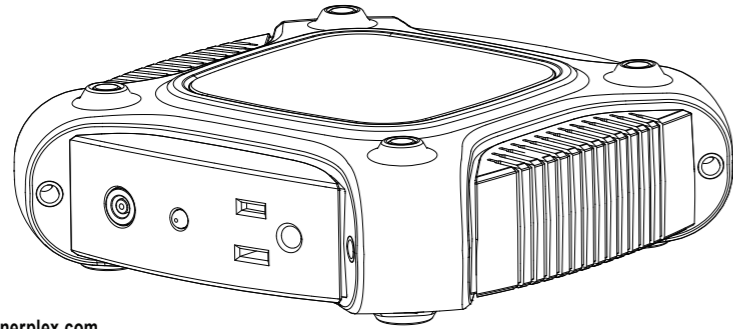

Warranty information available at goenerplex.com
If you require assistance please contact us
support@goenerplex.com

Ascent Solar Technologies Inc.
12300 Grant St. Thornton, CO 80241

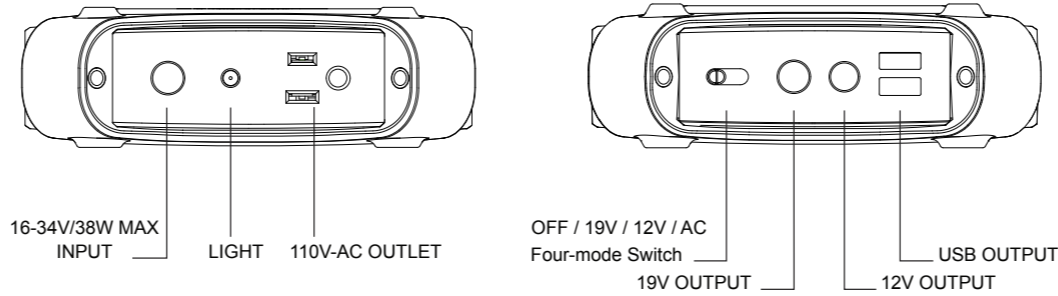

Generatr S100

Technical Specifications	
Usage:	
We recommend that you leave your EnerPlex S100 plugged in before use. If this is not possible, charge it every 3 months.	
Charging With:	
AC Wall Charger	5 hours
EnerPlex Commander XII™	
6~16 hours (1 pcs) depending on solar conditions	
3~8 hours (2 pcs) depending on solar conditions	
Charging Port (7.4 x 5.0 mm)	
16~34V, 38W MAX	
Outputs	
USB Port(Type -A)	5V, 2.4A MAX x 2
12V Port (6.3 x 3.0mm)	12V, 10A MAX
Laptop Port (7.4 x 5.0 mm)	19V, 90W MAX
AC	110V AC 100W RATED 120W MAX

Internal	
Battery Type	Lithium-ion
Battery Capacity	94.0Wh (10.8V/8700 mAh)
Life-span	
More than 300 cycles	
General	
Weight	2.05lbs(930g)
Dimensions	6 X 6 X 1.9inch(152.5X 152.5 X 48.5mm)
Tested and Certified	FCC, CE, RoHS
Operating Usage Temp.	14 - 122F (-10 - 50°C)

Light and Beep Indicators	
ON	Slide the Switch to 19V/12V/AC Position (Beeps 0.3 Seconds)
OFF	Slide the Switch to OFF Position (Beeps Twice)
Charging	Plug-in Power (Beeps 0.3 Seconds)
LED Sequential	Charging
All LED On	Charging Completed
All LED Fast Blinking	Overloading, UNPLUG OUTPUTS
LED Blinking	Battery Remaining Display
Last LED Fast Blinking	Low Battery (Beeps 3 Seconds)

POWER		CHARGE	
Ensure your gear is compatible by reviewing the specifications on your device and the S100. Plug in any USB, 12V, 19V or AC device.		Plug it in to fully charge from AC or solar panels.	
1		2	
FLIP		RECHARGE	
Flip the switch to the appropriate mode and power your devices.		Recharge with EnerPlex solar chargers or AC wall power.	
3		4	

Generatr S100	
	30+ CHARGES
	12 - 15 CHARGES
	15 - 18 CHARGES
	2 - 4 CHARGES
	1 - 2 CHARGES
	X

Packing List For GENERATR S100

19V/30W Input Adaptor
Output Power Cord
User Manual
Dell Tip (M9)
HP Tip (M20)
IBM Tip (M11)
19V Output Tip (M12)


Included with the Generatr S100 are laptop charging tips that can be used with the 19V output cable to directly charge Dell, HP, and ThinkPad laptops. Check with the laptop manufacturer to ensure the intended tip is compatible with your laptop. These tips optimize the charging process by removing the conversion of current to 110V. If the correct tip is not included, the 110V AC output can be used to charge laptops.

Warranty available at goenerplex.com

Manuel d'utilisateur


GENERATR S100

MODELE : GN6001GY

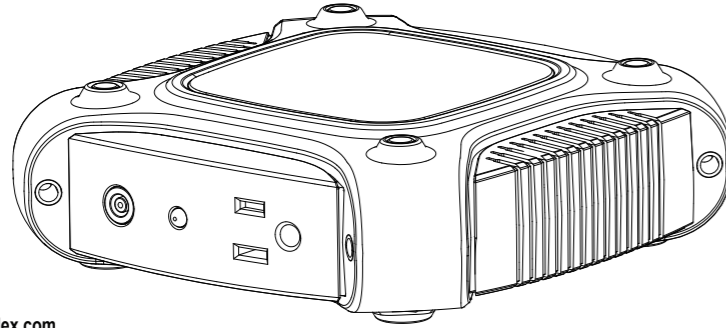

Garantie disponible sur le site goenerplex.com
Si vous avez besoin d'aide, n'hésitez pas à nous contacter
support@ascentsolar.com

Ascent Solar technologies Inc.
12300 Grant St. Thornton, CO 80241

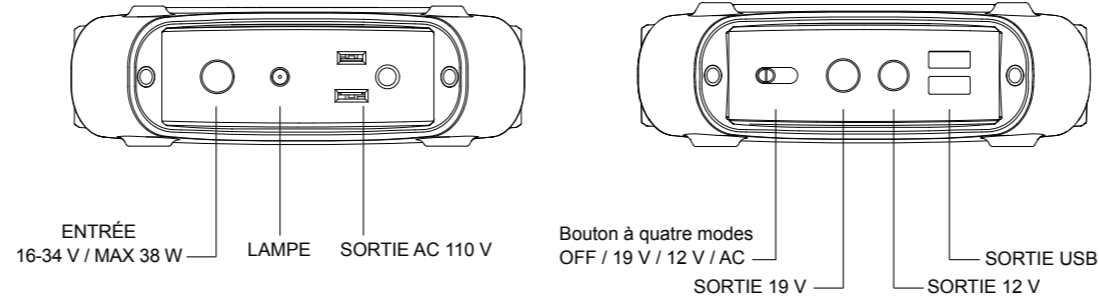

Connaître votre matériel

Spécifications techniques

Utilisation :

Nous vous recommandons de laisser votre EnerPlex S100 branché avant son utilisation. Si cela n'est pas possible, le recharger tous les 3 mois.

Se charge avec : Durées de charge approximatives

Chargeur AC prise murale 5 heures

Enerplex Commandr™

6-16 heures (1 pièce) en fonction des conditions d'ensoleillement

3-8 heures (2 pièces) en fonction des conditions d'ensoleillement

Entrées

Port de charge (7,4 x 5,0 mm) 16-34 V, MAX 38 W

Sorties

Port USB (Type -A) 5 V, MAX 2,4 A x 2

Port 12 V (6,3 x 3,0 mm) 12 V, MAX 10 A

Port Ordinateur portable (7,4 x 5,0 mm) 19 V, MAX 90 W

AC 110 V AC 100 W Réglé sur MAX 120 W

Intérieur

Type de batterie Lithium-ion

Capacité de la batterie 94,0 Wh (94.0Wh (10,8V/8700 mAh))

Longévité Plus de 300 cycles

Général

Poids 2,05 lb (930 g)

Dimensions 6 x 6 x 1,9 pouces (152,5 x 152,5 x 48,5 mm)

Testé et certifié FCC, CE, RoHS

Température d'utilisation 14 - 122 F (-10 - 50°C)




CHARGE

D'une prise murale ou
panneaux solaires


1

ALIMENTATION

Brancher n'importe quel appareil USB,
12 V, 19 V ou AC*

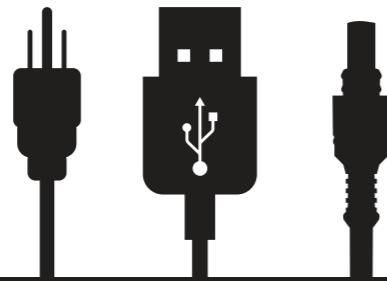

2



RECHARGER

Pour rester prêt garder S100 branché
sur une prise murale, ou l'alimentation
électrique du panneau solaire

3

Liste du contenu pour GENERATR S100

19V/30W adaptateur

Cable de recharge


Manuel d'utilisateur

Dell Tip x 2pcs (M9)

HP Tip (M20)

IBM Tip (M11)

19V Sorties Tip

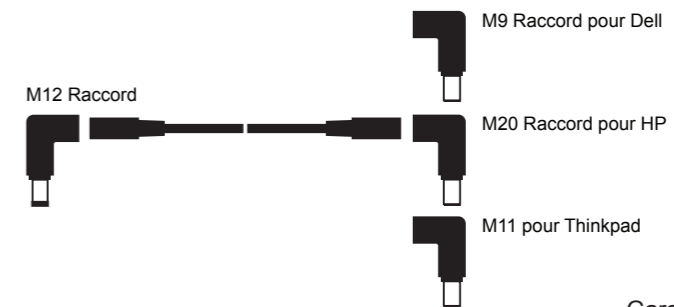

Garantie disponible sur le site goenerplex.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>