






## Function Keys

	IOS	Android	Windows	FN on Windows
	Home	Home	ESC	Web browser
	Decrease	N/A	<u>f1</u>	N/A
	Increase	N/A	<u>f2</u>	N/A
	Virtual keyboard	N/A	<u>f3</u>	N/A
	N/A	Back	N/A	N/A
	N/A	Email	N/A	Email
	Search	Search	<u>f5</u>	Search
	Language exchange	Language exchange	<u>f6</u>	Language exchange
	Previous track	Previous track	F7	Previous track
	Play/pause	Play/pause	F8	Play/pause
	Next track	Next track	F9	Next track
	Mute	Mute	<u>f10</u>	Mute
	Volume down	Volume down	<u>f11</u>	Volume down
	Volume up	Volume up	<u>f12</u>	Volume up
<b>Delete</b>	Delete	Delete	Delete	N/A
<b>FN+</b>	Lock	Lock	N/A	N/A
				

## Warranty

Califone warrants this product to be free from defective material and workmanship for one year from the purchase date. Our "Project Intercept" Customer Satisfaction program will replace defective parts and repair malfunctioning equipment under this warranty when the defect occurs under normal use.

### All Damage Claims Must Be Made With the Freight Carrier

Notify the freight carrier immediately if you observe any damage to the shipping carton or product. Repack the unit in the carton and await inspection by the carrier's claim agent. Notify your dealer of the pending freight claim.

### Returning Your Unit for Service or Repairs

Should your unit require service, contact our Customer Service Department online at [califone.com/techsupport](http://califone.com/techsupport) or via email [warranty@califone.com](mailto:warranty@califone.com) or by phone at 800-722-0500 / 818-407-2400 to first obtain an RA (Return Authorization) number before returning it to Califone. The unit must be returned to our factory via prepaid transportation only after the factory issues an RA number, which must be clearly written on the outside of the box.

### Califone<sup>®</sup> International, Inc.

1145 Arroyo Avenue, #A  
San Fernando, CA 91340 USA

Toll Free 800.722.0500 | Toll Free Fax 877.402.2248

International Customers call 818.407.2400


or Fax 818.407.2405

[califone.com](http://califone.com)

Califone KB4 Bluetooth Keyboard 03/20/2015



# Model KB4 Bluetooth Keyboard

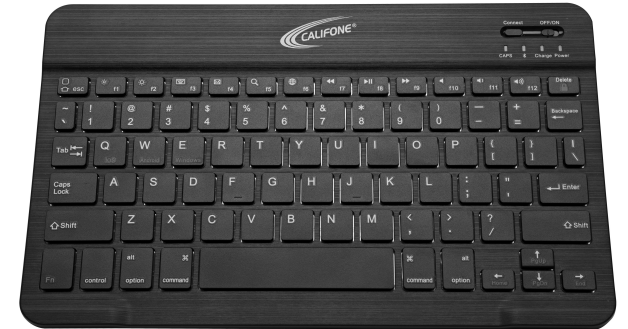

## User Manual

# CALIFONE® KB4 Bluetooth Keyboard

Thank you for purchasing the Califone® Model KB4 Bluetooth Keyboard.

We encourage you to visit [www.califone.com/registration](http://www.califone.com/registration) to register your product for its warranty coverage, to sign up to receive our newsletter, download our catalog, and learn more about the complete line of Califone® audio visual products, including portable and installed wireless PA systems, multimedia players and recorders, headphones and headsets, computer peripheral equipment, visual presentation products and language learning materials.

## Package Contents

- Ultra-slim KB4 Bluetooth keyboard
- Micro-USB charging cable
- User manual

## Specifications

<b>Bluetooth Specification</b>	Broadcom 3.0 chip
<b>Dimensions</b>	247 x 150 x 6.5mm
<b>Operating Range</b>	Up to 10 meters
<b>Modulation System</b>	GFSK
<b>Standby time</b>	30 days
<b>Charge time</b>	4 hours
<b>Uninterrupted Work Time</b>	44 hours
<b>Lithium Battery Capacity</b>	110 mAh
<b>Lithium Battery Life</b>	3 years
<b>Key Life</b>	3 million clicks



## Getting Started Guide

### How to Sync the Keyboard

**Step 1:** Slide the power button to “on”. The blue status light will illuminate for 4 seconds. The KB4 is still on.

**Step 2:** Press the [connect] button, the [Bluetooth] indicator light will be blinking blue

**Step 3:** On the device to be synced with the KB4, select: <Setting/General / Bluetooth / On>

**Step 4:** The device will display “Bluetooth 3.0 keyboard or Califone Keyboard” as an available device.

**Step 5:** Select “Bluetooth 3.0 keyboard” on the device and the device will immediately then display a code generated by the KB4

**Step 6:** Type the code on the KB4 and press enter; keyboard will now be paired to the device.

After pairing for the first time, your device will connect to the keyboard automatically when powering on the keyboard.

**Note:** In case of connect failure, delete the pairing record from your device and try the above procedures again.

## Button



On/Off slider switch: ON or OFF to control power for the device.



**Bluetooth connect button:** The On/Off switch is already in the On position, Press the [connect] button, The KB4 is now ready to be connect to your device.

## Status Light



CAPS

**Caps lock light:** Status light when stay on under the uppercase



**Bluetooth connect button:** The On/Off switch is already in the On position, Press the [connect] button, The KB4 is now ready to be connect to your device.



CHARGE

**Charging light (Red):** lights when charging and will turn off once the KB4 is fully charged.



POWER

**Battery status light:** slider the power button on. The red status light will illuminate for four seconds and then turn off to save power. THE KB4 keyboard is still on.

## Note:

Press FN and Q,W or E keys together to shift between Android, Windows or iOS systems after successfully connecting the KB4. Otherwise the keyboard's function key will be invalid.

Q - iOS

W - Android

E - Windows

## Power Saving Mode

The keyboard cover will enter sleep mode after being idle for 15 minutes. To activate it, press any key and wait for 3 seconds.

## Charging the keyboard

To charge the KB4, connect it to a powered USB port using the cable that comes with the keyboard.

## Usage tips

1. Do not place heavy objects on the keyboard cover.
2. Do not knock or dismantle the product.
3. Keep the product away from oil, chemicals, and organic liquids.
4. Clean the product by lightly rubbing it with a slightly damp cloth.
5. Dispose of batteries according to local laws.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>