

DVX-2002F

Small and Medium Business

IP-PBX

VERSION 2.00

Quick Installation Guide








D-Link[®]

VOIP

1 Package Contents

Thank you for purchasing D-Link IPPBX. These are the items Included with your IPPBX purchase:

	IP PBX		Power Adapter
	QuickInstallation Guide		CD-ROM (containing Manual and Quick Installation Guide)
	Warranty & Safety Information		

2 Hardware Installation

The followings are the instructions for setting up DVX-2002F IP PBX. Please refer to the illustration and follow the simple steps below to quickly install your IP phone.

2.1 Safety Precautions


Notes:

To avoid any device damage and bodily injury caused by improper use, please observe the following rules.

- Use only the power adapter provided with IP PBX.
- Make sure that the supply voltage matches the specifications indicated on the rear panel of IP PBX.
- To avoid the electric accident, do not open or remove the cover of IP PBX when it is working as well as off the power.
- Before cleaning the device, cut off the power supply. Do not clean it by the waterish cloth, and never use any other liquid cleaning method.

2.2 Physical Connection

DVX-2002F

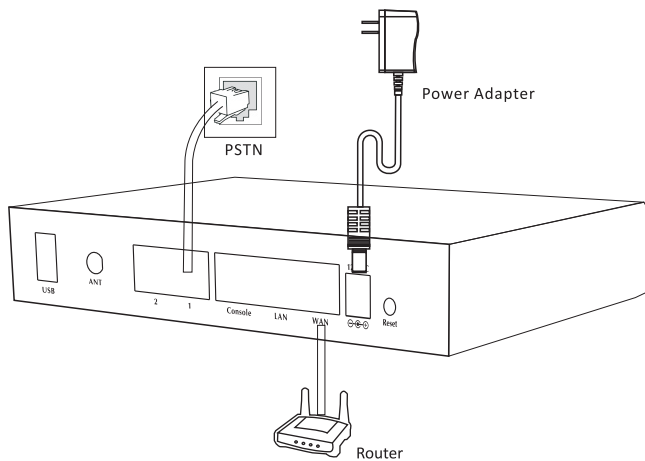

2.3 LED Definitions

Indication	Function	Status	Explanation
PWR	Power Status	On	Power on
		Off	Power off
SYS	System Status	Blink	System works
		Off	System failure
		On	System doesn' t boot
WAN	WAN Data Status	Blink	Data transfer
		Off	Disconnected
		On	Connected but no data transfer
LAN	LAN Data Status	Blink	Data transfer
		Off	Disconnected
		ON	Connected but no data transfer

3 Basic System Configuration

3.1 Web Login

- Step 1. Connect a computer and the DVX-2002F IPPBX in the same network. IP address is usually in the 192.168.1.X range.
- Step 2. Start a web browser. To use the user interface, you need a PC with Internet Explorer (version 7.0 or higher), Firefox, Chrome.
- Step 3. Enter the default address “https://192.168.1.100:9999” of the DVX-2002F IPPBX into the URL address box.
- Step 4. Enter the default username (admin) and password (admin). Then click “Login” to enter the Web-based user interface.



Default URL address:

Default address of WAN port: https://192.168.1.100:9999


Default address of LAN port: https://192.168.10.100:9999

Default Username: admin

Default Password: admin

3.2 Network Configuration

Step 1. Go to Network Settings → Network

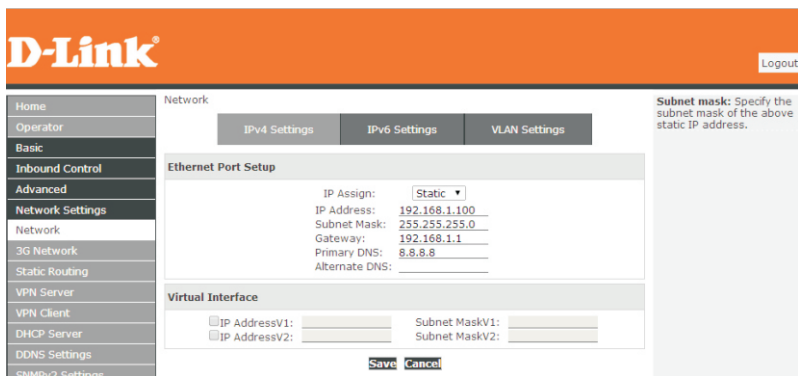

Home Operator Basic Inbound Control Advanced Network Settings Network 3G Network Static Routing VPN Server VPN Client DHCP Server DNS Settings SNMPv2 Settings

Network

IPv4 Settings IPv6 Settings VLAN Settings

Logout

Ethernet Port Setup

IP Assign: Static
IP Address: 192.168.1.100
Subnet Mask: 255.255.255.0
Gateway: 192.168.1.1
Primary DNS: 8.8.8.8
Alternate DNS:

Virtual Interface


IP AddressV1: Subnet MaskV1:
 IP AddressV2: Subnet MaskV2:

Save Cancel

Subnet mask: Specify the subnet mask of the above static IP address.

Step 2. Configure the network information

There are three types of network connection. They are Static, DHCP, PPPoE(Point-to-Point Protocol over Ethernet). You can find detailed settings in the user manual.

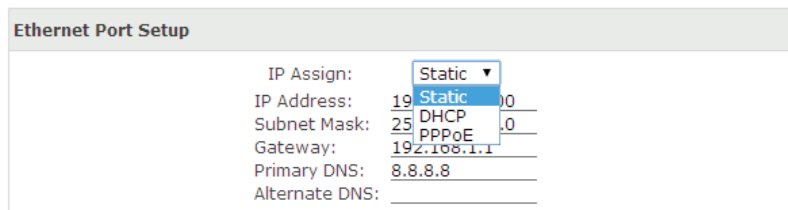


Ethernet Port Setup

IP Assign: Static
IP Address: 192.168.1.100
Subnet Mask: 255.255.255.0
Gateway: 192.168.1.1
Primary DNS: 8.8.8.8
Alternate DNS:

3.3 Choose the Module

Go to System → Module Settings

When using the module except DVX-2020 module, you need to set the module parameters with the below page.

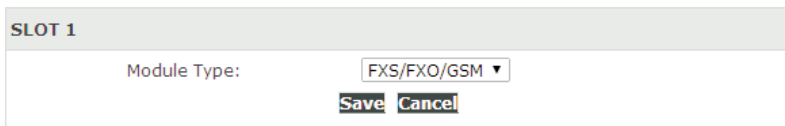

The screenshot shows a configuration window titled "SLOT 1". Inside, there is a label "Module Type:" followed by a dropdown menu currently displaying "FXS/FXO/GSM". Below the dropdown are two buttons: "Save" and "Cancel".

Module Type: Select the module type of the device slot.

- DVX-2020 module Default type. You don't need set anything for these modules.

4 Further configuration

Thank you for purchasing D-Link products. The above steps introduce simple configuration for DVX-2002F. For further configuration, please refer to the user manual.

5 Hazardous Substances List

DVX-2002F	Hazardous Substances					
	Pd	Hg	Cd	VI	PBB	PBDE
Housing	X	O	X	O	O	O
PCBA	X	O	O	O	O	O
Power supply	X	O	O	O	O	O

Notice:

O: The content of hazardous Substances meets the restriction of SJ/T 11363-2006

X: The content of hazardous Substances in part of device is over the restriction of SJ/T 11363-2006, but it is still in the exception list of Directives 2002/95/E

P NO.:OTR0317

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>