

## The Kramer SI-VGAT UXGA Step-In Commander

Congratulations on purchasing your Kramer TOOLS® **SI-VGAT UXGA Step-In Commander** which is ideal for boardrooms and presentation rooms.

The Kramer **SI-VGAT** is a UXGA (up to WUXGA) and unbalanced stereo audio remote control panel that is used to remotely take control of a compatible switcher, for example, the **VP-81KSi**.

[Figure 1](#) and [Table 1](#) define the **SI-VGAT UXGA Step-In Commander**.

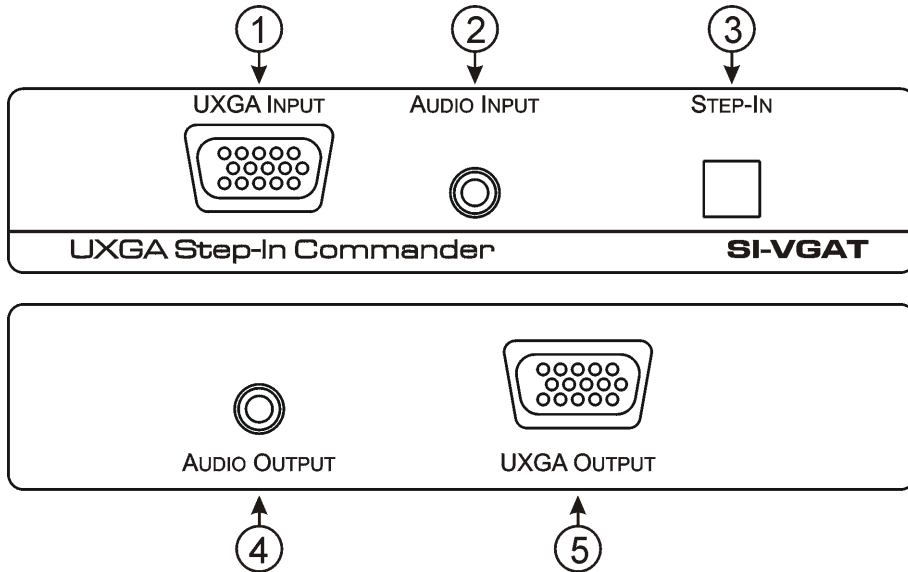


Figure 1: SI-VGAT UXGA Step-In Commander Front and Rear Panel

Table 1: SI-VGAT UXGA Step-In Commander Front and Rear Features

#	Feature	Function
1	UXGA INPUT 15-pin HD (F) Connector	Connect to the UXGA video source (up to WUXGA)
2	AUDIO INPUT 3.5mm Mini Jack	Connect to the unbalanced stereo audio source
3	STEP IN Button	Press to switch the input to this remote control panel. The button lights when active
4	AUDIO OUTPUT 3.5mm Mini Jack	Connect to the 3.5mm mini jack audio input connector of a compatible switcher (for example, the VP-81KSi)
5	UXGA OUTPUT 15-pin HD (F) Connector	Connect to the UXGA video input connector of a compatible switcher (for example, the VP-81KSi)

[Figure 2](#) illustrates connecting the **SI-VGAT** to a source and the **VP-81KSi** switcher.

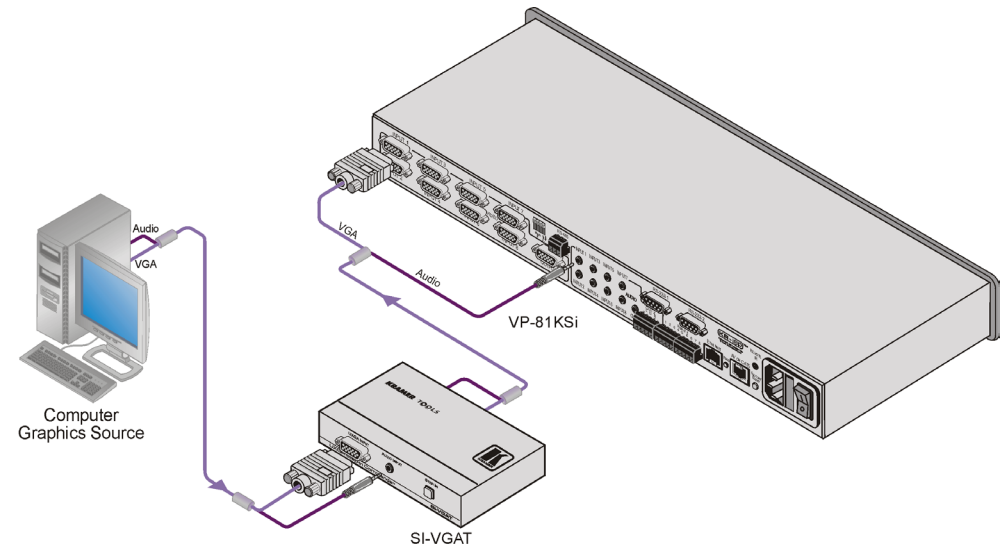


Figure 2: SI-VGAT Wiring Connections

To connect the **SI-VGAT** as illustrated in [Figure 2](#):

1. Connect the UXGA video source (for example, a computer graphics source) to the UXGA INPUT connector on the front panel of the **SI-VGAT**.
2. Connect the unbalanced stereo audio source (for example, a computer graphics source) to the 3.5mm mini jack AUDIO INPUT connector on the front of the **SI-VGAT**.
3. Connect the AUDIO OUTPUT 15-pin HD connector on the rear panel of the **SI-VGAT** to one of the 3.5mm mini jack audio inputs on the rear panel of the **VP-81KSi**.
4. Connect the UXGA OUTPUT 15-pin HD connector on the rear panel of the **SI-VGAT** to one of the UXGA inputs on the rear panel of the **VP-81KSi**.

## Product Details

Product Details of the **SI-VGAT** are shown in [Table 2](#).

Table 2: Product Details<sup>1</sup> of the SI-VGAT UXGA Step-In Commander

DIMENSIONS:	12cm x 7cm x 2.5cm (4.9" x 2.8" x 0.98") W, D, H
WEIGHT:	0.3kg (0.66lbs) approx

<sup>1</sup> Product details are subject to change without notice



# SI-VGAT UXGA Step-In Commander Installation Instructions

---

For the latest information on our products and a list of Kramer distributors,  
visit our Web site at [www.kramerelectronics.com](http://www.kramerelectronics.com)

---



**Kramer Electronics, Ltd.**

Web site: [www.kramerelectronics.com](http://www.kramerelectronics.com)

E-mail: [info@kramerel.com](mailto:info@kramerel.com)

P/N: 2900-000728 REV 1

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>