

## 8x8 Analog Video Router w/ AAF

Model 860-XL818C



- ◆ 8 x 8, Analog Video, Analog Audio
- ◆ Local or Remote Control Panel
- ◆ AFV, breakaway, or X-Y Control
- ◆ Maximum of 256 Remote Panels
- ◆ RS-232 Serial Control, Standard

The 800 Series Routing Switchers are wide bandwidth vertical interval switchers designed for professional video production facilities. The compact design of Link's routing switchers makes them an essential part of any facility.

Packaged in a 19" rack mountable chassis, the switchers are supplied with a single front-loaded power supply. An optional redundant power supply is available. High quality front panel push buttons are used for selection of inputs and outputs.

Remote control panels are interconnected with standard Ethernet 10Base2 single coax connections. RS-232 is provided through a standard D-sub connector. Panels can be set to control a single output bus or the entire matrix.

The Link Switcher's flexibility is unmatched in the industry. Modular construction offers unique flexibility to the user, and provides an easy means of adding additional features or upgrading to digital modules. Power supplies are accessible from the front of the unit and may be easily installed or removed. Analog switchers can easily be upgraded to digital by adding field installable modules.

Industry standard BNC connectors are used for video inputs and removable 3-Pin connectors are used for stereo audio inputs and outputs.

Routers are available for analog video only, analog video with stereo audio follow, digital video only, and digital video with two-stream AES/EBU audio follow. **SUPPLIED WITH CONTROL PANEL WITH AUDIO BREAD-AWAY.**

The Link 8 x 8 routing system features:

- Modular Design – plug-in modules for video & audio. No active components on the frame.
- Two power supply slots are accessible from the front panel. One power supply is standard.
- A redundant power supply is available as an option.
- Detachable X-Y front panel control with Ethernet 10Base2 coax connection.
- Analog video only models and models with audio follow video.
- Digital video only models and models with analog audio follow.
- Digital video only models and models with digital audio follow.
- RS-232 control standard.

### Remote Mounting Kits for Control Panels

The supplied control panel for all switchers is shipped installed into the front of the main electronics chassis. The control panel can be removed from the electronics chassis in the field and installed into a remote mounting kit. The mounting kit hardware includes rack-mounting hardware for the control panel, a blank panel(s) that is installed onto the front of the electronics chassis, and a power supply.

<b>860-XL818A</b>	8 x 8 Analog Video Only Routing Switcher	One
<b>860-XL818C</b>	8 x 8 Analog Video Routing Switcher with Stereo Audio Follow Video	One

# 8 x 8 Routing Switching Systems

## MODEL 860-XL818C

### COMPOSITE VIDEO INPUT:

Number: ..... 8  
 Video Level: ..... 1.0Vpp ±6dB  
 Impedance: ..... 75S Looping  
 Coupling: ..... DC  
 Connector: ..... BNC  
 Return Loss: ..... 40 dB @ 3.58 or 4.43 MHz

### AUDIO INPUT:

Connector Type: ..... Weco, 3-Pin Disconnect  
 Impedance: ..... 20KS  
 Level: ..... +26dBu, maximum  
 CMRR: ..... 60dB @ 1 KHz

### COMPOSITE VIDEO OUTPUTS:

Number: ..... 8  
 Connector: ..... BNC  
 Level: ..... Unity Gain, ±0.1 dB  
 Character Video: ..... 90 IRE Units  
 Return Loss: ..... 35 dB @ 3.58 or 4.43 MHz  
 Character Background: ..... 10 IRE Units  
 Impedance: ..... 75S ±1%  
 Vertical Interval Switching: ..... Line 6, NTSC  
 Frequency Response: ..... ±0.1dB to 5MHz  
 ..... -3.0dB to 50MHz  
 Differential Gain: ..... 0.10%, 10% to 90% APL  
 Differential Phase: ..... 0.10°, 10% to 90% APL  
 Crosstalk: ..... 62dB to 5 MHz, worse case  
 Propagation Delay: ..... 5 nS, typical  
 Hum and Noise: ..... >60dB to 5 Hz  
 DC Offset: ..... <25mV  
 Line Rate Tilt: ..... <0.1%  
 Field Rate Tilt: ..... <0.1%  
 SNR: ..... -73dB

### AUDIO OUTPUTS:


Signal Type: ..... Balanced  
 Connector Type: ..... Weco, 3-Pin Disconnect  
 Impedance: ..... >30S  
 Level: ..... 26dBu, maximum  
 Frequency Response: ..... ±0.1dB to 20kHz, ref 1kHz  
 Crosstalk: ..... 90dB @ 10 KHz  
 DC Offset: ..... <50mV  
 SNR: ..... <100dB, 20Hz to 20KHz  
 IM/THD: ..... <0.02%

### ENVIRONMENTAL:

Temperature: ..... 0° to 50° C ambient  
 Humidity: ..... 10%/90% non-condensing  
 Power: ..... 9.5 VAR  
 AC Voltage: ..... 120/240 VAC±10%, 50/60Hz

### MECHANICAL:

Height: ..... 1.75 inches  
 Width: ..... 19 inches  
 Depth: ..... 9.25 inches  
 Weight: ..... 9lbs

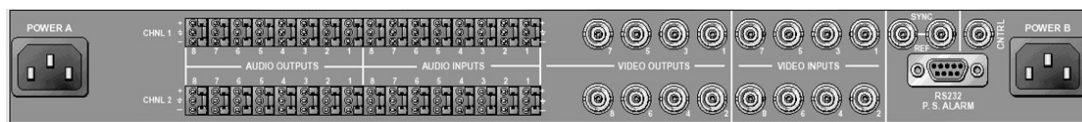

860XL818C REAR PANEL

**LINK ELECTRONICS, INC.** 2137 Rust Avenue Cape Girardeau, MO 63703-7668  
 Phone 573 334 4433 FAX 573 334 9255

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>