


Redundant Alarm Converter NNU5-1

- **Monitors up to 126 members of a Fire Detection Control Panel BCnet216**
- **Circular redundant alarm line monitored for wire breakage**
- **Meets redundancy requirements of ÖNORM F 3000**
- **Easy installation in fire detection control panel Series BC216**

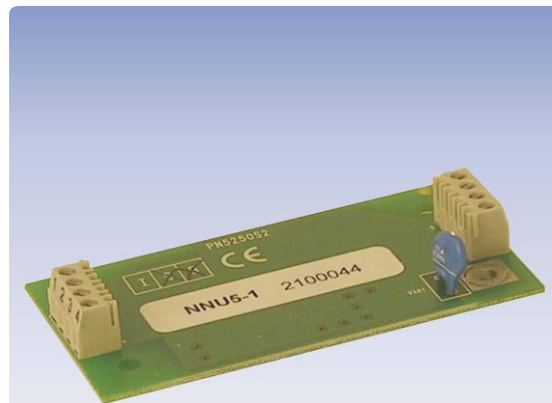

Description

The Network Redundant Alarm Converter NNU5-1 is required in the network fire detection control panel BCnet216 for the alarm transmission according to ÖNORM F 3000. It has to be installed in every sectional

control panel that is connected to the transmitting device to the fire brigade. The componentry guarantees the alarm transmission to a transmitting device despite multiple line failures in the GSSnet.

Specifications

Current consumption at 24V	typ. 4mA
BCnet redundant alarm line	2-core circular line
Line resistance	max. 1k Ω
Ambient temperature	-5°C to +50°C
Dimensions L x W x H	75 x 40 x 15 (mm)
Weight	40g
Part No.	214031
Order name	Network Redundant Alarm Converter NNU5-1

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>