

Heavy Duty Indoor Pan-tilt Head



Example of use with HD AK-HC1500




Panasonic introduces new advanced high performance pan-tilt system AW-PH405 that supports teleprompters and long throw lenses for various applications.

Pan-tilt Systems

Key performance

- High pan-tilt speed: 45 ° /sec
- Quiet motion: Noise level under NC35 (at 30 ° /sec)
- Accurate preset motion: ± 0.05 ° (using with a camera, a lens and a teleprompter)
- Maximum load: 15 kg
- Pan range: 300 ° Tilt range: 300 °

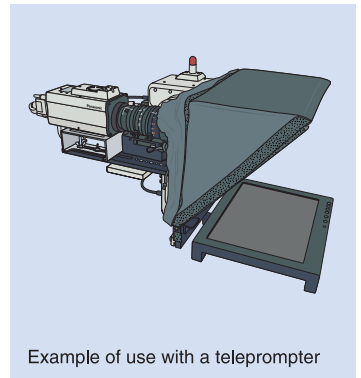


Example of use with a teleprompter

Key features

- 50 preset positions and 10 tracing memories (Maximum time: 300 sec) are available by using the pan-tilt head controller AW-RP655.
- Teleprompter output is available.
- Up to five camera systems can be controlled using Panasonic controllers (AW-RP655/RP555/RP400*¹)
- Maximum control distance:
1 500 m ... AW-RP400 + AW-IF400 (Optional protocol converter)*²
1 000 m ... AW-RP655/RP555
- A removable tally light is available on the pan-tilt head with an optional 6" tally light as well.
- RS-232C controllable (Through Panasonic controllers)
- Professional motor drive lenses and broadcast ENG lenses*⁴ can be connected.

System example

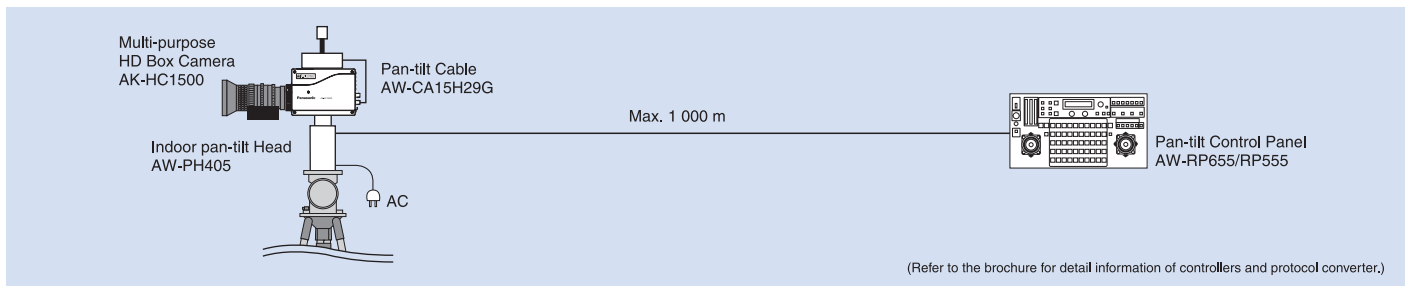

Specifications

Pan/tilt range	Pan: 300 ° Tilt: 300 °	Max. control distance	1.5 km (AW-RP400+AW-IF400)* ²
Pan speed	45 ° /sec (15 ° /sec with tele-prompter)		1.0 km (AW-RP655/AW-RP555)
Tilt speed	45 ° /sec (15 ° /sec with tele-prompter)	Operating temperature	-5 °C to +45 °C
Stop accuracy	± 0.05 ° (± 3 ')	Power supply	AC220 V to 240 V
Noise level	NC35 (at 30 ° /sec)	Power consumption	Approx. 120 W
Maximum load	15 kg	Weight	Approx. 10 kg
Input/Output	Video output	Y, Pr/C, Pb, VIDEO, SDI* ³	Dimension (WxHxD)
	GENLOCK input	Tri-level SYNC/Black Burst	
	Others	AUX, tele-prompter input (BNC)	
Lens interface	Broadcast ENG* ⁴ (Fujinon RD/Canon IAS)/ Professional Motor Drive (MD)		

*1 Use together with AW-IF400 if you use AW-RP400.

*2 You can't use tracing memories if you use AW-RP400 in combination with AW-IF400.

*3 Maximum transmission distance of video signals will be compensated 500 m by using AW-RC400.

*4 Use an optional cable if you use a broadcast ENG lens.

• See operators manual for model number and ordering information if you use a tele-prompter and tally light. • Specifications and features are subject to change without notice.

Panasonic

Matsushita Electric Industrial Co., Ltd.
Panasonic System Solutions Company
Corporate Broadcast and Multimedia Division

4-3-1 Tsunashima-Higashi,
Kohoku-ku, Yokohama City 223-8639, Japan

<http://panasonic.biz/broad/>

Australia +61 2 9887 6222
Bahrain +973 252292
Egypt +20 2 3938151
Indonesia +62 21 385 9449
Iran +98 21 2271463
Jordan +961 6 586 1914
Kazakhstan +7 3272 980 891

Kuwait +965 481 2123
Lebanon +961 1 216827
Malaysia +60 3 5549 5422
New Zealand +64 9 272 0100
Pakistan +92 5370320 21
Russia & CIS +7 495 980 42 06
Saudi Arabia +966 1 465 0709
Singapore +65 6270 0110
South Africa +27 11 313 1400

Thailand +66 2 731 8888
U.A.E. +971 4 282201
Ukraine +380 44 4903437
[ext. 112]

AW-JPBPH405



Printed in Japan

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>