




755 SERIES MULTI-DISPLAY TIMERS

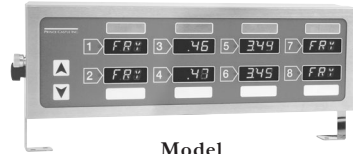


Model
755-HM8

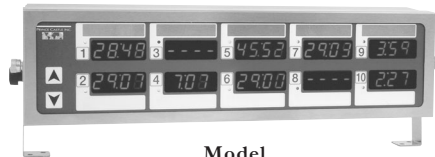

Model
755-HM10

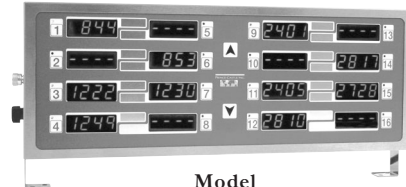

Model
755-HM16



The 755 Series Multi-Display Timers includes three economical, single-function timers in eight, ten and sixteen channel models.

These easy-to-use timers count down or up in minutes and seconds, or hours and minutes. Each channel has its own display, and can be programmed independently. Slide in replaceable menu strips identify the product being timed on each channel, and are replaceable as restaurant menus change.

Prince Castle timers are easy to program and simple to use. The push of a button activates each channel; an audible alarm and flashing channel button alert the operator when timing is complete. Operators also have the option to program a preliminary alarm to warn the end of the timing cycle is near.

Prince Castle timers are standard 120V and are backed by a one-year parts and labor warranty.

STANDARD FEATURES

- Each channel counts down or up in minutes and seconds, or hours and minutes
- Each channel has its own display - capable of displaying both alpha and numeric characters
- Toggles between countdown (or count-up) time and duty function
- Each channel capable of storing two different programs
- Features an Alert alarm to warn, "The end is near"
- Removable identification strips can be easily changed to accommodate new menu items
- Program time and one duty function per channel
- 8 programmable volume levels
- Transformer built into housing (no fat plug)
- One-year parts and labor warranty

755 SERIES MULTI-DISPLAY TIMERS




PRINCE CASTLE INC. 
WORLDWIDE

SPECIFICATIONS




DIMENSIONS

MODEL NUMBER	WIDTH IN. (CM)	HEIGHT IN. (CM)	DEPTH IN. (CM)
755-HM8	14.69 (37.3)	7.06 (17.9) Top Mount 6.15 (15.6) Bottom Mount	2.77 (7.0)
755-HM10	18.17 (46.1)	6.56 (16.6) Top Mount 6.71 (17.0) Bottom Mount	2.86 (7.2)
755-HM16	18.08 (45.9)	7.08 (17.9) Top Mount 8.46 (21.4) Bottom Mount	2.86 (7.2)





ELECTRICAL

MODEL NUMBER	DESCRIPTION	VOLTS*	HZ.	WATTS	AMPS	PLUG NUMBER	PLUG CONFIG.
755-HM8	8-Channel Multi-Display	100-240	50/60	25 max	.10 max	NEMA 5-15P	
755-HM10	10-Channel Multi-Display	100-240	50/60	25 max	.10 max	NEMA 5-15P	
755-HM16	16-Channel Multi-Display	100-240	50/60	25 max	.10 max	NEMA 5-15P	

*All 755 Series timers work on any voltage and are single phase.

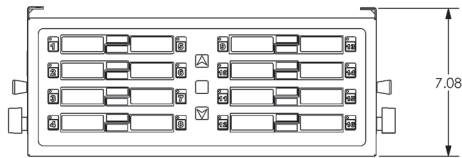

WITH TOP MOUNT BRACKETING

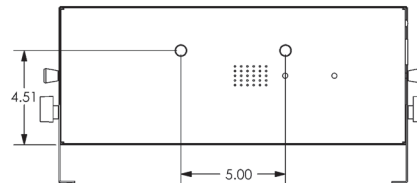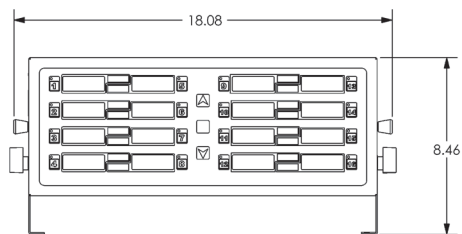

WITH BOTTOM MOUNT BRACKETING

MULTI-DISPLAY TIMERS

755 SERIES



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>