


NEC MultiSync® MD213MG


21.3" high-resolution 3MP grayscale LCD display
ideal for medical imaging applications

Designed exclusively for the demanding needs of radiology and PACS, the NEC MultiSync MD213MG, a 21.3" 3-Megapixel (MP) grayscale display, delivers unrivaled imaging performance. Benefits you'll realize from this medically certified display include:


- NEC's UA-SFT 3MP (1536 x 2048) liquid crystal technology offers long life at high brightness without compromising contrast or viewing angles, resulting in outstanding grayscale image quality.
- Digital uniformity correction reduces screen uniformity errors and compensates for differences in grayscale and luminance across the entire screen
- Built-in front sensor constantly monitors calibration and corrects for minor fluctuations of light output, helping to maintain the factory calibration throughout the life of the monitor
- Each NEC MultiSync MD213MG monitor is calibrated out of the box to the DICOM grayscale display function for luminance.
- 12-bit gamma provides for more finely detailed, high-definition rendering of images and crisper display of even the most delicate shadings
- GammaComp™ MD software, included with each display, ensures consistent image quality. The software provides a simple interface for conformance to the DICOM standard, while providing an easy-to-use QA environment for medical imaging. Optionally, GammaComp MD Administrator provides computer networks with centralized control and management of multiple display systems.

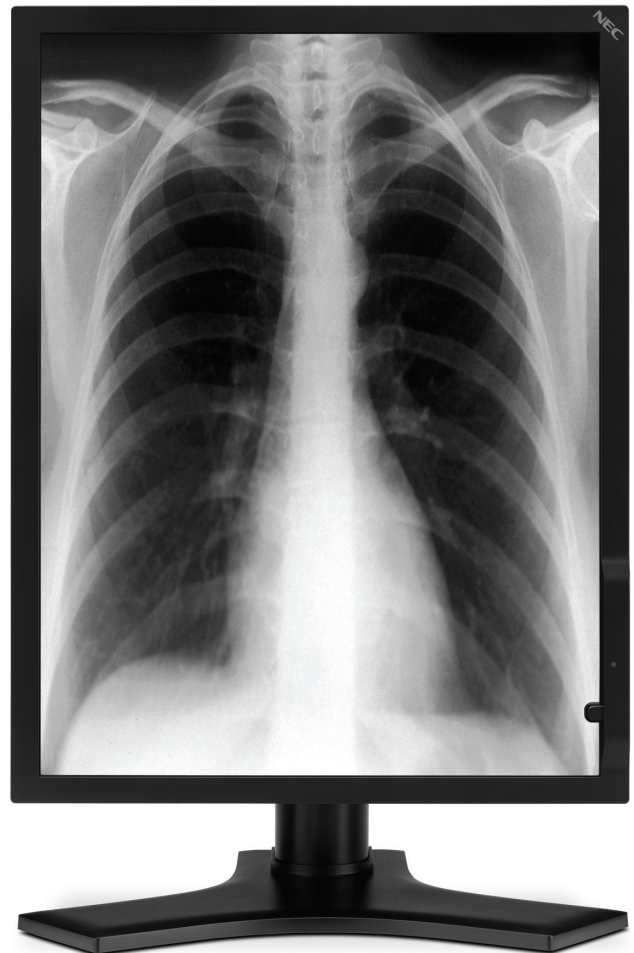

NEC MULTISYNC  SERIES The clear choice in diagnostic displays.

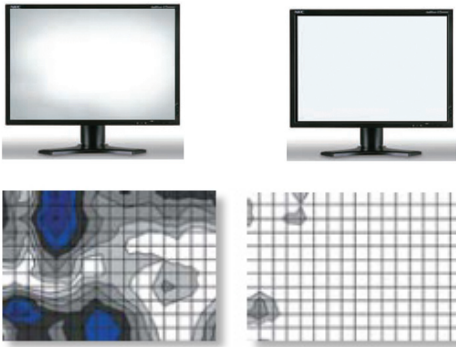


Achieve complete and brightness uniformity. By nature, LCD panels contain uniformity errors, which are visible as slightly brighter or darker areas on the screen. To combat this inherent trait, each MultiSync MD213MG display is individually characterized during production using a fully automated system that measures multiple points across the screen at different gray levels. These measurements are used to build a 3-D correction matrix stored inside the display. This data is used to compensate for the uniformity not only as a function of position on the screen but of gray level as well. In turn, this technology reduces the non-uniformity to virtually unnoticeable levels and applies a digital correction to each pixel on the screen to compensate for differences in luminance.

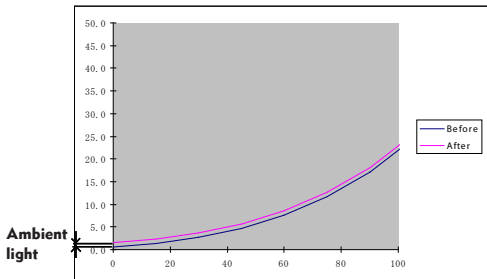

For optimal image viewing in any lighting condition, the MD213MGs built-in ambient light sensor can automatically adjust the calibration of the display to suit the environment.

For consistent image quality, the built-in front sensor constantly monitors and maintains brightness for optimal DICOM GSDF calibration. For non-assisted conformance, calibration and reporting functions, the sensor is capable of measuring monitor brightness, whitepoint and contrast response.




The MD213MG's design allows you to adjust the display to your exact ergonomic preferences. In addition to tilt and swivel functionality, the height adjusts up to 150mm, and the display pivots between landscape to portrait orientations.

Model	MultiSync MD213MG	
Display	Viewable Size Image: 21.3" Pixel Pitch: 0.21mm Pixels Per Inch: 120 Brightness (typical): 400 cd/m ² calibrated / 1450 cd/m ² max Contrast Ratio (typical): 900:1 Viewing Angle (typical): 176° Vert., 176° Hor. (88U/88D/88L/88R)@ CR > 10 Response Time (typical): Rapid Response™ 24ms (12ms Gray-to-Gray) Panel Bit Depth: 12-bit internal LUTs, displays up to 1024 shades of gray out of 4096	
Synchronization Range	Horizontal: 31.5 - 93.8 KHz (Analog) / 31.5 - 95.4 KHz (Digital) Vertical: 50 - 85 Hz Video Bandwidth: 25.2 - 209.3 MHz (DualLink)	
Input Signal	Video: Analog RGB 0.7 Vp-p/75 Ohms Sync: Separate sync: TTL Level (Positive/Negative) Composite sync: TTL Level (Positive/Negative) Composite sync on green: (0.3Vp-p negative 0.7Vp-p positive)	
Inputs	DVI-D and DVI-I	
Resolutions Supported (Analog/Digital)	640 x 400 @ 70-85 Hz* 1600 x 1200 @ 60-75 Hz 720 x 400 @ 70-85 Hz 1920 x 1200 @ 60 Hz 640 x 480 @ 60-85 Hz 2048 x 1536 @ 60 Hz 800 x 600 @ 56-85 Hz 832 x 624 @ 75 Hz 1024 x 768 @ 60-85 Hz 1152 x 864 @ 70-85 Hz 1152 x 870 @ 75 Hz 1280 x 960 @ 60 Hz 1280 x 1024 @ 60-85 Hz	
Native Resolution	2048 x 1536 @ 60 Hz landscape / 1536 x 2048 @ 60 Hz portrait	
Additional Features	Ultra-thin frame (bezel), No Touch Auto Adjust™, VESA Mount, tilt, swivel, height-adjustable stand (5.9 in./150mm), pivot, vacation switch, 12-bit LUTs, black level adjustment, AmbiBright, ColorComp uniformity correction, overdrive, Analog/Digital CableComp™, GammaComp™ MD software, standalone calibration	
Voltage Rating	AC 100-120V / AC 220-240V	
Power Consumption (typical)	On: 100W Power Savings Mode: 2W	
Dimensions (WxHxD)	Net (with stand): 18. x 17.1 - 23 x 12 in. / 467.8 x 434.3 - 584.3 x 306mm Net (without stand): 18.4 x 14.2 x 4.4 in. / 467.8 x 361.6 x 110.7mm	
Net Weight	(with stand): 23.5 lbs. / 10.7 kg (without stand): 16.5 lbs. / 7.5 kg	
VESA Hole Configuration Specifications	100 x 100mm	
Environmental Conditions	Operating Temperature: 5-35° C / 41-95° F Operating Humidity: 30-80% Operating Altitude: 3000m / 9842 ft. Storage Temperature: -10-60° C / 14-140° F Storage Humidity: 10-85% Storage Altitude: 12,192m / 40,000 ft.	
Safety Standards	UL/C-UL, UL60601-1, Gost/PCT, PSB, CCC, FCC Class B/Canadian DOC, C-tick, MPR II / MPR III, VCCI (class 2), JIS C 61000-3-2, static electricity guideline, low emission guideline, ISO9241-307, TCO '03, TCO '06, US Mercury regulations, WEEE, RoHS, SASO, Energy Star, J-Moss, FDA 510k pending, CE-MDD, IRAM, TUV GM, EPEAT, AAPM-TG-18, DIN V 6868-587 (Germany) CATB	
Limited Warranty**	5 years parts and labor, including Advanced Overnight Exchange	

* Digital only

** Backlight usage limited to 500 cd/m² or less for entire duration of warranty

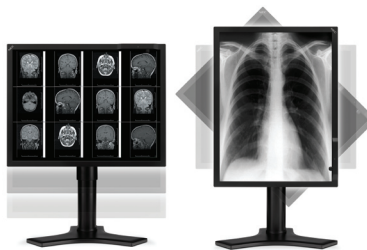

MultiSync is a registered trademark, and ColorComp and GammaComp are trademarks of NEC Display Solutions. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change. 3/09 Ver. 2.
©2009 NEC Display Solutions of America, Inc. All rights reserved.

NEC Display Solutions
500 Park Boulevard, Suite 1100
Itasca, IL 60143
866-NEC-MORE



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>