

a brilliant performance
begins with
confidence



NEC LT220, LT240K and LT260K
Portable Projectors

LT220	SVGA, 2,000 ANSI
LT240K	XGA, 2,000 ANSI, standard short throw lens
LT260K	XGA, 2,400 ANSI

Empowered by Innovation

NEC

confidence comes with the right equipment

From the lens to the connector panel, NEC projectors are precision-crafted for performance, quality and long-term reliability. As one of the world's largest electronics companies, we have the technology and expertise to anticipate your needs and provide you with tomorrow's products today. NEC is equally committed to our environment. We use environmentally-friendly materials and continually look for ways to improve efficiency. In addition, our care extends well beyond the sale with world-class service and support. Our projectors are covered by InstaCare®, which provides free repair and return within three business days or next business day replacement. When overnight isn't fast enough, we offer InstaCare XpressSM for next flight replacements. TravelCareSM provides service coverage for the international traveler. No matter where you are, NEC will be there too.

Bright enough for installation and light enough for travel, the easy-to-use **LT260K** may be the only projector you'll ever need. It's specifically designed for high resolution computers and for displaying detailed information like financial data and graphics. It's ideal for any small- to large-sized business, school or government that needs equipment for meeting or conference rooms as well as portable display. It offers maximum brightness for large rooms or rooms with significant ambient light. The LT260K features best-in-class functionality ensuring that every presentation, regardless of the environment, will be a winner.

The **LT240K** is an affordable choice for high-resolution display for a variety of applications. It features a short throw lens allowing you to project large screen images over short distances. Even in small meeting rooms, you can be confident that all eyes will be on your message.

The value priced **LT220** is for computers and software that operate in lower resolutions and is ideal for showing images, video and PowerPoint slides. This is a good choice for churches, schools and small businesses where the projector will be used on a desktop or cart.

high brightness up to 2400 lumens

up to 2000:1 contrast ratio
(full-on, full-off)

designed to meet the needs of color blind
and hearing impaired users

light weight at 6.4 pounds

horizontal, vertical and diagonal keystone
correction, 3-D Reform™

extremely low noise at 32dB normal
and 29dB eco-mode

wired and wireless LAN capability

computer-free presentations
present directly from USB and
CompactFlash storage devices

sealed optics

password protection

carrying case supplied

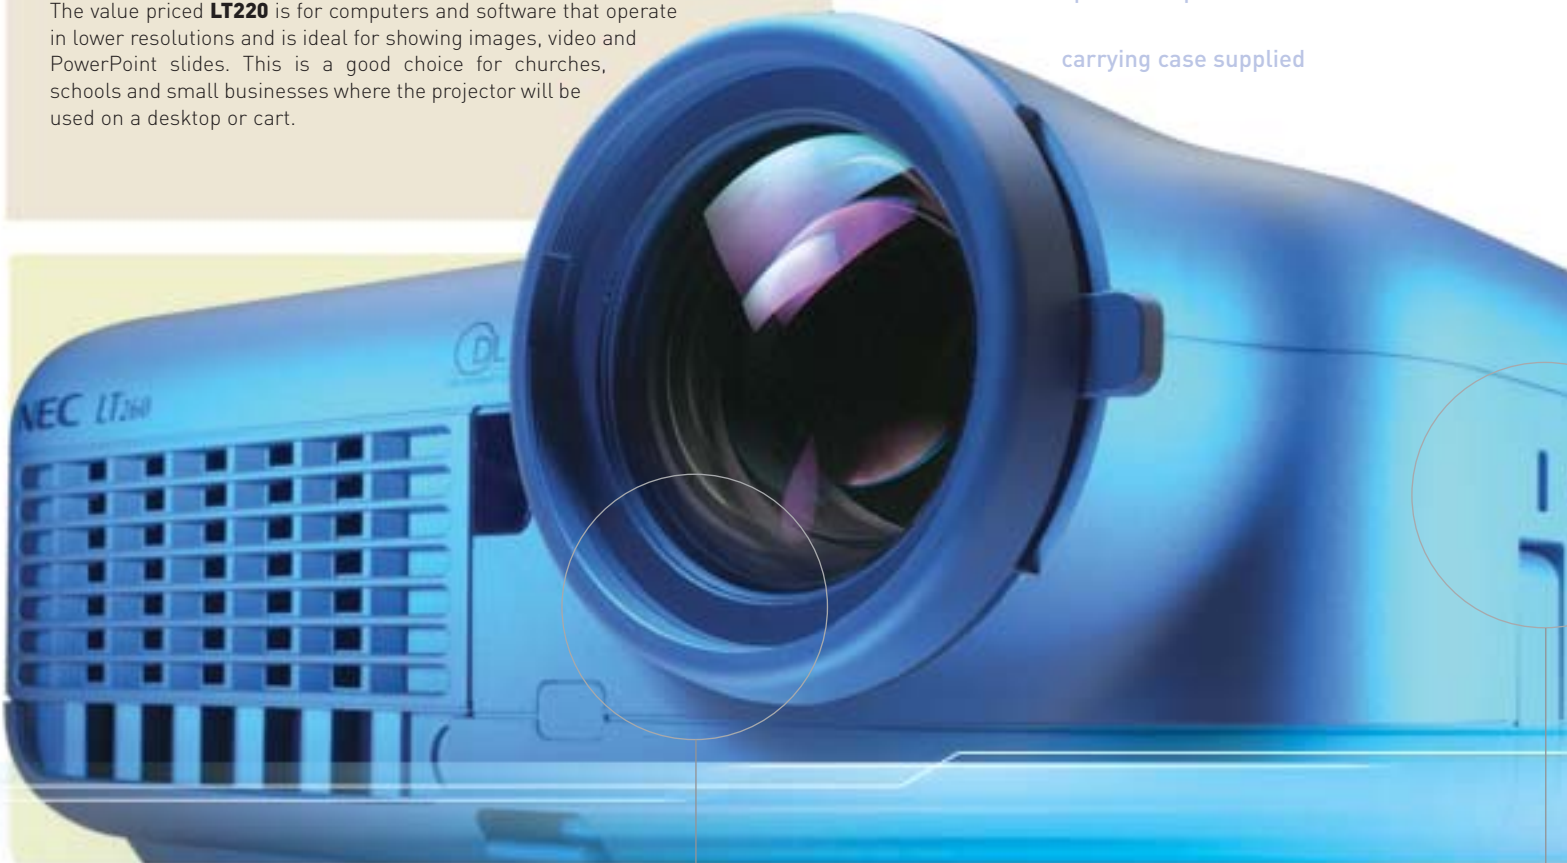


figure 1

sealed optics
for use in dusty
or smokey
environments



figure 2

optional
security cable



sometimes being square is a good thing.

Now you can display a perfectly square image even from the most severe angle with NEC's proprietary new 3-D Reform™ geometry correction technology. The result is a vivid, razor-sharp image. If the projection is distorted, simply set the four corners of the screen to activate the keystone correction then square the picture. This allows greater freedom in projector and room set up because now the projector can be at an angle to the screen. When a USB mouse is connected, keystone corrections can be made with a simple click.


wired and wireless local networks.*

The LT200 Series projectors are compatible with both wired and wireless LANs through NEC's technology, ImageXpress. ImageXpress makes possible the fast, efficient, high-quality transfer of computer screen images to the projector.


In arbitration wireless mode you can have several users give presentations from separate notebooks, in succession and in real time using the same projector. Peer-to-peer wireless mode lets you project to multiple screens using multiple projectors from a single notebook. No more bothersome cables, no more meeting interruptions, no more worries.

Using cable LAN cards also enable you to monitor and control the projector over the network using a computer to switch the unit on/off, check the usage time of the lamp, and receive automatic email notification when the lamp reaches the end of its life, so downtime is greatly reduced or eliminated.

3-D reform

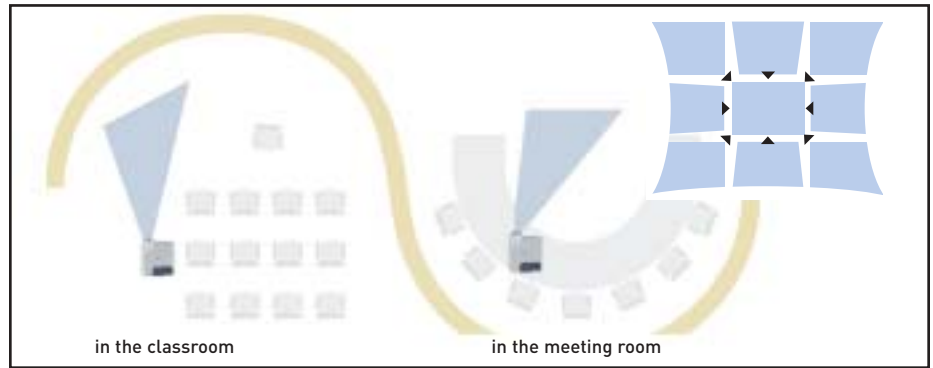

wireless and wired LAN

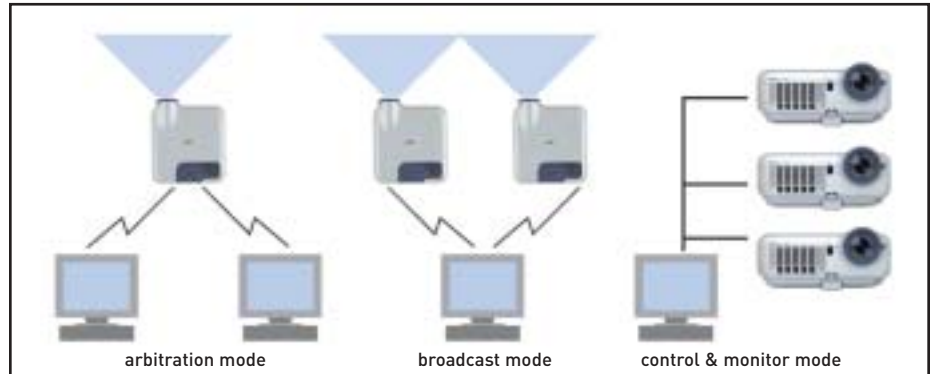

special features

keep your presentation and projector safe.

No need to worry about the safety of your presentation or projector. The LT200 Series has enhanced security including password protection and an optional security card feature that completely disables the projector to unauthorized users. To protect against projector theft, you can purchase ceiling mounts from NEC that feature security screws and include attachments for locks. Control panel buttons can also be locked to ensure projector settings are not changed by an unauthorized user.

sealed optics reduce maintenance costs.

The LT200 Series features sealed optics to reduce the amount of dust and smoke that enters the optics. This is especially important in arid climates, dusty environments like classrooms (chalk), military field operations, or smoke-filled rooms, bars or restaurants.**

your audience hears you, not your equipment.

The LT200 Series features extremely low fan noise at 32dB standard and 29dB in Eco-mode, making them among the quietest models available.

environmentally friendly and conserves energy.


We take our responsibility to the environment very seriously, especially since our products are used worldwide. We continually look for ways to improve the efficiency of our projectors with features like EcoMode™ that reduces overall projector power consumption and help conserve energy. In addition our projector factories are certified to meet the ISO environmental quality standard (ISO 14001) and are ISO9001 and ISO9002 certified.



figure 3
input and output connections



LT260K/LT240K/LT220

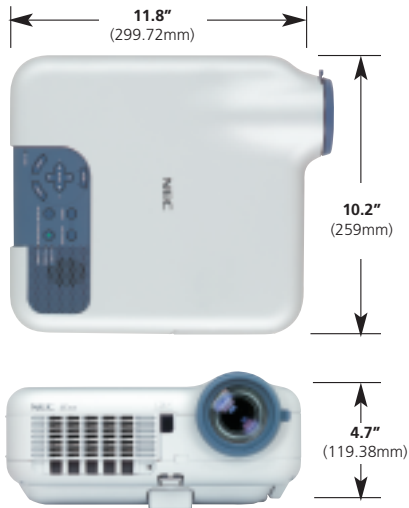

Accessories



Additional Features

Advanced AccuBlend™	Ensures detailed images when non-native resolution sources are connected to the projector
AutoSense™	Automatic set-up and one touch adjustments for ease of use
Monitor Output	For connection of external monitor
VORTEX Technology Plus™	Provides uncompromising display of video and data. Improves white level, color accuracy, dynamic range, and display of varying levels of black in an image. Picture management enables six-axis adjustment of CMY and RGB for display of personal color preferences. Includes sRGB setting.
Image magnification	64 step image magnification with location control
Security	Projector is inoperable if password or PCMCIA security card are not input. Projectors can be locked down by attaching security cable to lock slot. Ceiling mount includes security cable attachment and security screws.
Sleep Timer	Timer can be set to automatically shut down projector
High Performance Video	High contrast, sharp image frame with enhanced color imagery management
Specifically Designed for Special Needs	The LT Series complies with ADA 508 and offers closed captioning and menus that can be read by the color blind
Remote Laser Switch	Remote control laser pointer has internal shut off switch
Energy Saving Features	Complies with Executive Order 13221. Uses 0.6W when in standby and includes on/of switch

* Requires wireless LAN card accessory.

** Periodic cleaning may be required.



For more information, call (800) NEC-INFO or visit www.necvisualsystems.com

NEC is a registered trademark of NEC Corporation. All other trademarks are the property of their respective owners. All specifications subject to change without notice.

NEC Solutions (America), Inc.
Visual Systems Division
1250 Arlington Heights Rd., Suite 400
Itasca, IL 60143-1248

Optical

DLP Technology	LT220 - 0.67" 10 degree SDR DMD LT240K / LT260K - 0.69" 12 degree DDR DMD
Resolution (RGB)	LT220 - 800 x 600 pixels native, up to UXGA with Advanced AccuBlend LT240K / LT260K - 1024 x 768 pixels native, up to UXGA (1600 x 1200) with Advanced AccuBlend
Lens	Manual zoom and manual focus (1.2 zoom) LT220 / LT260K: F2.2 - 2.5, f = 28.4 - 34.0 LT240K: F2.5 - 2.9, f = 22.4 - 27.0
Throw Ratio	LT220: 2.0 - 2.06:1 (wide), 2.46 - 2.5:1 (tele) LT240K: 1.49 - 1.56:1 (wide), 1.81 - 1.87:1 (tele) LT260K: 1.93 - 2.0:1 (wide), 2.38 - 2.42:1 (tele)
Light Output (ANSI Rated)	LT220 - 2000 standard, 1600 Eco-mode LT240K - 2000 standard, 1600 Eco-mode LT260K - 2400 standard, 1900 Eco-mode
Lamp	220W DC NSH
Lamp Life	2000 hours Standard 3000 hours Eco-Mode
Contrast Ratio	LT220: 600:1, LT240K: 2000:1, LT260K: 1600:1
Image Size	30" to 500" diagonal (for details consult throw charts on website)
Projection Distance	LT220: 48" - 999" LT240K: 35.7" - 749.9" LT260K: 46.4" - 970"
Projection Angle (degrees)	LT220/LT260K - 12.3 - 12.5 (tele), 14.9 - 15.2 (wide) LT240K - 15.7 - 16.2 (tele), 18.6 - 19.4 (wide)
Keystone Correction	LT220/LT260K - horizontal ± 35 degrees, vertical ± 40 degrees with 3-D Reform LT240K - horizontal ± 34 degrees, vertical ± 40 degrees with 3-D Reform

Electrical

Inputs (compatibility)	Computer: (2) mini D-Sub 15-pin, YCbCr Component Video through mini D-Sub 15-pin (optional cable) Video: (1) RCA, (1) S-Video (NTSC, PAL, PAL-60, SECAM, NTSC4.43, PAL-N, PAL-M) HDTV - 1080i, 1080i/50, 720p, 480p, 480i, PAL progressive/50 Audio: (1) mini audio, (1) L/R RCA PC Card: PCMCIA type II USB Type A: control of menu, on-screen annotations and 3D reform, USB storage device USB Type B: connect to computer for mouse control
Outputs	(1) monitor output (mini D-Sub 15-pin), (1) mini audio with variable audio output
Synchronization Range	Horizontal - 15 - 100kHz, Vertical 50 - 120Hz
Video Bandwidth	RGB 100MHz (-3dB), Video 6.5MHz (-3dB), monitor output bandwidth 80MHz (-3dB)
Pixel Clock Frequency	Less than 135MHz
Color Reproduction	16.7 million colors displayed simultaneously
External Control	RS232, IR (AMX/Crestron compatibility)
Sync Compatibility	Separate Sync / Composite Sync / Sync of G
Built-in Speaker	1W
Power Requirements	100 - 120/200 - 240VAC, 50/60Hz
Input Current	3.0A(100 - 120VAC), 1.5A(200-240VAC)
Power Consumption	280W (max), 8W idle, 0.6W standby with power on/off switch
Fan Noise	<32dB standard mode, <29dB Eco-mode

Mechanical

Installation Orientation	Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear
Dimensions	260mm(W) x 300mm(D) x 120mm(H), 10.2" x 11.8" x 4.7"
Net Weight	2.9Kg/6.5Lbs (LT220 and LT260K): 3.2Kg. / 7.2Lbs. (LT240K)
Environment	Operational Temperatures 0 - 35 degrees Centigrade, 32 - 95 degrees Fahrenheit
Regulations	USA UL1950, FCC Class B; Canada CSA950 (C-UL)
Accessories	User's manual (CD-ROM), PJ/PC remote, batteries, power cable, 15-pin mini D-sub cable, USB cable A & B, quick connect guide, registration card, lens cap with attachment string & rivet

Warranty

Warranty	Owners receive a 2-year limited parts and labor warranty. InstaCare™ is provided during the first year of coverage for registered owners. InstaCare provides the original owner with 3-business day repair and return or next business day exchange of the projector. When used under normal operating conditions, the lamp is covered for 90 days or 500 hours, whichever comes first.
----------	---

Product/Accessories Order Information

Order Code	Description
LT220	SVGA, 2000 ANSI lumens projector
LT240K	XGA, 2000 ANSI lumens projector
LT260K	XGA, 2400 ANSI lumens projector
TRAVELPRO200	Executive faux leather rolling case w/ projector and laptop compartments. Fits in airline overhead compartment.
ATAPRO200	Rugged rolling case for projector shipment and check-in
LTROLLER200	Platinum, high impact plastic roller case for secure transport of projector. Fits in airline overhead compartment.
ADP-CV1	Component video adapter
LT60CM	Ceiling mount
LT60LPK	Replacement lamp
LTSCREEN	50" diagonal table top screen in compact carrying case
SC200	Security cable for desktop and cart applications and ceiling mount applications
SWL-2100N-NU	Wireless LAN card

Warranty Options

VLMPL-01	1 year limited parts and labor extension
VLMIC-01	2nd year InstaCare coverage
VLMIC-02	3rd year extended warranty plus 2nd and 3rd year InstaCare coverage
VLMTC-02	For duration of the standard warranty (2 years), loaner or repair services are available in EU countries, Japan, and Australia (for U.S. and Canadian residents traveling abroad).

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>