



User guide, English

OneRemote RMB4 controller installed in a Bang & Olufsen Beo4 remote control.

Operate these devices using the modified Beo4:

Samsung LED TV 7-series and other.

Operate devices that are operate able with RCU's like:

Samsung most remotes for Samsung digital TV.

Congratulations

With the OneRemote controller **installed** inside your Bang & Olufsen Beo4 remote control, you can fully operate your non B&O TV with this **terminal**. This guide explains how.

If your Beo4 has already been correctly set up, you can now proceed to one of the two operation tables:

- ⇒ **Page 9**
If your Beo4 has **enabled** Navi buttons . *1
- ⇒ **Page 8**
In any other case.

Important !!

If the OneRemote controller has not yet been optimized for your setup, refer to the installation section about the initial setup and option programming. There is no programming needed during everyday use.

The OneRemote controller that has been installed inside your Beo4 remote control, can be used in any Beo4 remote control. Both first generation models and the latest with extra buttons for manoeuvring, the Beo4 Navi.

To get the most of your modified Beo4, the OneRemote controller must be programmed according to the Beo4 model and the environment that your TV is a part of. Refer to page 5 and forward, for the initial setting.

**1 Extra buttons have been added on never Beo4 models, Beo4 Navi. Se page 10.*


The OneRemote controller for the Beo4 remote control

The OneRemote controller is a small microcomputer module, which is specifically made to be built in to a Bang & Olufsen Beo4 remote control.

The controller captures the commands that were meant for operating a Bang & Olufsen device. Before the commands are emitted from the Beo4, these commands are converted, and therefore also able to operate a non Bang & Olufsen TV.

Each controller is dedicated for operating a specific product like an Apple iPod docking station, a flat screen TV, a curtain controller etc.

The controller makes the Beo4 able to operate a third part device, still able to operate any other Bang & Olufsen products.

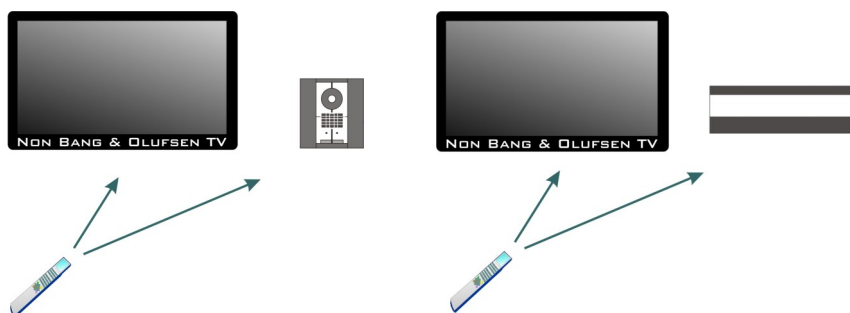

If there is a Bang & Olufsen audiomaster in the room, it can be used for handling the sound. Speakers connected to an audiomaster are of a much better quality than the speakers in a TV. In a B&O linkroom setup with Beolink Active or Beolink Passive, you can also use these speakers to improve sound from most TV's.

Only a simple audio cable is needed between the TV and the audiomaster. See the option programming section about AAUX and PC modes on page 11.


Operating with OneRemote.

To be able to operate the non B&O TV optimal using the OneRemote modified Beo4, the user has to be familiar with the operations available when using the original remote control, as described in the TV's user manual.




A beo4 remote control is not equipped with as many keys as most remote controls for non B&O devices. We have designed an operation 'layout' that works logically, even when shifting between different OneRemote operated devices. To get a common layout for many devices, we therefore needed to redefine a few of the beo4 buttons to other functions.

The Beo4 Navi model introduces new buttons, making it easier to make operation table's, closer to the TV's own.


Coloured function buttons.



To make room for easy access to more important functions, in some layouts we have moved the coloured function buttons, to a lower layer. In these layouts to send a 'color' command, a  must be pressed before the coloured button itself.

This way we are able to assign other functions to the coloured buttons in direct mode. In a OneRemote environment the coloured buttons are often assigned to these operations:

	Guide, EPG or similar.
	Back, Backup, Return or similar.
	Programme zapping. P+/ P- , Channel up/ down or CH+/ CH-.

Go, Navi or Stop shifted operation.



Some of the buttons has two or three operations. To get to these they have to be preceded with  or **STOP**.

In case of Beo4 Navi a **PLAY** button has been added to replace the  button, when in 'mode 2'. In mode 2 the OneRemote uses the Center button for shifting, instead of . Refer to page 10.

Buttons that has been assigned secondary functions are listed in the operating table on page 9.





Programme stepping, up/ down manoeuvring in menus.

Most set top boxes and TV's has 4 arrow buttons for manoeuvring in on-screen menus, up, down, left and right. In addition they are equipped with separate programme stepping buttons for zapping through the programme list. Often these keys are named P+, P-, CH+ or CH-.

OneRemote often makes use of the  and the  keys for programme zapping. This way the four up, down, left and right buttons are free to be used for the more natural use of manoeuvring in on screen menus.








Using a Beo4 Navi in mode 2, manoeuvring in On-screen menus is fully handled using the added 'joy-stick', not available on previous Beo4 models. In a Beo4 Navi setup we therefore can make use of the up and down arrows for programme zapping.








Setting the Zap Mode Option

If the OneRemote controller is **not** set to operate in Navi mode, the Beo4 buttons  and  are used for programme stepping. The  and  buttons are used to manoeuvre up and down in an on-screen menu. This is the default factory setting, as described above.

Selecting the Zap mode buttons:

Enter one of these 2 codes within 10 seconds to set the preferred Programme Zap mode buttons.

LIGHT  MENU  STOP  9  0  PLAY *The  and  buttons will be used for programme zapping.*

LIGHT  MENU  STOP  9  1  PLAY *The  &  buttons will be used for programme zapping.*

Disabling and Dual TV Option

The OneRemote controller in the modified Beo4 remote control can be enabled or disabled using this option. When disabled the Beo4 remote control operates as a Beo4 that has not been modified.

In DUAL TV-mode the OneRemote controller enables operation of both a B&O TV and the non B&O TV which the controller is made to operate.

Disabling and Dual TV mode:

Enter one of these 3 codes within 10 seconds to set the preferred mode.

LIGHT **MENU** **STOP** **2** **0** **PLAY** *Disables the OneRemote controller.*

LIGHT **MENU** **STOP** **2** **1** **PLAY** *Enables the OneRemote controller.*

LIGHT **MENU** **STOP** **2** **2** **PLAY** *Enables the OneRemote controller in Dual TV mode.*













In this mode:

TV + **1** *starts operating a B&O TV.*


TV + **2** *starts operating the non B&O TV*









Translation table when **not** in Navigation mode. * see page 10

Daily operation


	Turns on the TV	
	Turns off the TV	
 	Enter	
	*1*2 Prog +	<i>TTV page+</i>
	*1*2 Prog -	<i>TTV page -</i>
	*1*2 Guide	
	*1*2 Return	<i>TTV Hold</i>
	Exit	
	Source	
 	Menu	<i>TTV Index</i>

*1 The up/ down arrow operations can be exchanged with the blue and yellow buttons. See page 6.








*2 As the direct function of the coloured function buttons has been assigned to other functions, these have to be preceded with a  to retrieve the actual coloured function.

		Green function
		Yellow function
		Red function
		Blue function

















Text TV operation

	Text TV on/ mix
	Text TV off









Playback operations

	Play	<i>press 1 sec.</i>
 	Stop	
 	Pause	
	◀ / ▶	Rew/ FF
	Record	

Other operations

		FAV	
		Channel list	<i>TTV Hide</i>
		info	<i>TTV Show</i>
		Tools	<i>TTV Size</i>
		Content	
		Subtitle	
		Media Play	
		Internet	

Special/ alternative operations





		Play
		Record
		3D
 		AD

Translation table when *in* Navigation mode. * see page xxxxxx

Daily operation

TV	Turns on the TV
●	Turns off the TV
GO GO	Enter
▲ ▼ ◀ ▶	CH+ / CH- REW / FF

Navi buttons are used for manoeuvring in on-screen menus.

	Yellow key
	Blue key
	Green key
	Red key

EXIT	Exit	
BACK	Back	
MENU	Source	
GO MENU	Menu	<i>TTV Index</i>
GO 	EPG	
GO 	CH List	
GO 	PRE CH	
GO 	TOOLS	

Text TV operation

TEXT	Text TV on/ mix
TV	Text TV off

Playback operations

PLAY	Play
STOP STOP	Stop
GO STOP	Pause
RECORD	Record


Other operations


GO 1	FAV	
GO 2	Channal list	<i>TTV Hide</i>
GO 3	info	<i>TTV Show</i>
GO 4	Tools	<i>TTV Size</i>
GO 5	Content	
GO 6	Subtitle	
GO 7	Media Play	
GO 9	Internet	

Special/ alternative operations

GO 8	Record
GO EXIT	3D
STOP EXIT	AD

Beo4 NAVI mode option.

Newer Beo4 models are named Beo4 Navi due to an added special navigation button. A joystick type control button, placed where previous Beo4 models have a  button.

If your Beo4 has a  button, this chapter is **not** relevant for you !

Use of the Beo4 Navi joystick navigation operation:

Enter one of these 2 codes within 10 seconds to enable or disable the OneRemote controllers use of the ex-

Set the Beo4 Navi remote control in operation mode 2, as described in the B&O user guide that was supplied with your Beo4, if you want to use these. Otherwise select mode 1.

LIGHT  MENU  STOP  5  1  PLAY

Enable use of the NAVI control.

When the OneRemote controller NAVI mode has been enabled, use the operation table on page 9.

LIGHT  MENU  STOP  5  0  PLAY


Disable use of the NAVI control.

When the OneRemote controller NAVI mode has been disabled, use the operation table on page 8.

Setting the OneRemote Volume Option

When the TV mode is selected by pressing the **TV** button, it automatically powers on the TV and turns on the picture.

But often the sound is lead to external speakers attached to a B&O audiomaster or another amplifier. This option set the way that the OneRemote handles volume in TV mode.



This option also can power on other B&O devices than the TV, when **TV** is selected. Audio is then typically fed from the TV to the audiomaster from using a Line to Datalink cable. Moving the TV sound to the speakers of the audiomaster, significantly improves the sound quality.

Volume options	Sound destination	Volume control
LIGHT MENU STOP 0 0 PLAY	Volume disabled	No volume regulation
LIGHT MENU STOP 0 1 PLAY	The non B&O TV	Non B&O TV format
LIGHT MENU STOP 0 2 PLAY	AAUX *1	AAUX in B&O format
LIGHT MENU STOP 0 3 PLAY	PC *2	PC in B&O format
LIGHT MENU STOP 0 4 PLAY	AAUX + 6 *3	AAUX in B&O format
LIGHT MENU STOP 0 5 PLAY	AAUX + 7 *3	AAUX in B&O format

*1 When **TV** is pressed your Beo4 it sends a Power On command to your TV. At the same the Beo4 sends a **AAUX** command to a Bang & Olufsen audiomaster. Until another source is selected, volume commands will be directed to the B&O audiomaster.

*2 When **TV** is pressed your Beo4 it sends a Power On command to your TV. At the same the Beo4 sends a **PC** command to a Bang & Olufsen system. Until another source is selected, volume commands will be directed to the B&O system.

*3 When **TV** is pressed your Beo4 it sends a Power On command to your TV. At the same the Beo4 sends a **AAUX + 6** or **7** command to a Bang & Olufsen linksystem. Until another source is selected, volume commands will be directed to the B&O linksystem.

The Beo4 VMEM / VTAPE button option

On your OneRemote modified Beo4 remote control, the VMEM button can be programmed, to open a specific source on your non B&O TV.

VMEM/ VTAPE options

Enter one of these codes within 10 seconds, to select the source on the non B&O TV that will be selected with the VMEM or VTAPE button.

LIGHT	MENU	VMEM	0	1	PLAY	No new source selected.
LIGHT	MENU	VMEM	1	1	PLAY	The AV1 socket on the TV is opened.
LIGHT	MENU	VMEM	2	1	PLAY	The AV2 socket on the TV is opened.
LIGHT	MENU	VMEM	3	1	PLAY	The DTV tuner on the TV is opened.
LIGHT	MENU	VMEM	4	1	PLAY	The Component 1 socket is shifted to.
LIGHT	MENU	VMEM	5	1	PLAY	The Component 1 socket is accessed.
LIGHT	MENU	VMEM	6	1	PLAY	The HDMI 1 socket is accessed.
LIGHT	MENU	VMEM	7	1	PLAY	The HDMI 2 socket is accessed.
LIGHT	MENU	VMEM	8	1	PLAY	S-VHS 1
LIGHT	MENU	VMEM	9	1	PLAY	USB Wiselink

As the OneRemote controller is able to operate many different TV models, there might be some sources in the table, that is not available on your TV. The only way to find out if your TV accepts these codes, is testing each of the options.

If a source is not access able using these options, sources must be accessed the same way as using the TV's original remote control. Using the source button.

The Beo4 DTV/ SAT button option

On your OneRemote modified Beo4 remote control, the DTV/ SAT button can be programmed, to open a specific source on your non B&O TV.

DTV/ SAT options

Enter one of these codes within 10 seconds, to select the source on the non B&O TV that will be selected with the DTV/ SAT button.

LIGHT	MENU	DTV	0	1	PLAY	No new source selected.
LIGHT	MENU	DTV	1	1	PLAY	The AV1 socket on the TV is opened.
LIGHT	MENU	DTV	2	1	PLAY	The AV2 socket on the TV is opened.
LIGHT	MENU	DTV	3	1	PLAY	The DTV tuner on the TV is opened.
LIGHT	MENU	DTV	4	1	PLAY	The Component 1 socket is shifted to.
LIGHT	MENU	DTV	5	1	PLAY	The Component 1 socket is accessed.
LIGHT	MENU	DTV	6	1	PLAY	The HDMI 1 socket is accessed.
LIGHT	MENU	DTV	7	1	PLAY	The HDMI 2 socket is accessed.
LIGHT	MENU	DTV	8	1	PLAY	S-VHS 1
LIGHT	MENU	DTV	9	1	PLAY	USB Wiselink

As the OneRemote controller is able to operate many different TV models, there might be some sources in the table, that is not available on your TV. The only way to find out if your TV accepts these codes, is testing each of the options.

If a source is not access able using these options, sources must be accessed the same way as using the TV's original remote control. Using the source button.

The Beo4 DVD button option

On your OneRemote modified Beo4 remote control, the DVD button can be programmed, to open a specific source on your non B&O TV.

DVD options

Enter one of these codes within 10 seconds, to select the source on the non B&O TV that will be selected with the VMEM or VTAPE button.

LIGHT	MENU	DVD	0	1	PLAY	No new source selected.
LIGHT	MENU	DVD	1	1	PLAY	The AV1 socket on the TV is opened.
LIGHT	MENU	DVD	2	1	PLAY	The AV2 socket on the TV is opened.
LIGHT	MENU	DVD	3	1	PLAY	The DTV tuner on the TV is opened.
LIGHT	MENU	DVD	4	1	PLAY	The Component 1 socket is shifted to.
LIGHT	MENU	DVD	5	1	PLAY	The Component 1 socket is accessed.
LIGHT	MENU	DVD	6	1	PLAY	The HDMI 1 socket is accessed.
LIGHT	MENU	DVD	7	1	PLAY	The HDMI 2 socket is accessed.
LIGHT	MENU	DVD	8	1	PLAY	S-VHS 1
LIGHT	MENU	DVD	9	1	PLAY	USB Wiselink

As the OneRemote controller is able to operate many different TV models, there might be some sources in the table, that is not available on your TV. The only way to find out if your TV accepts these codes, is testing each of the options.

If a source is not access able using these options, sources must be accessed the same way as using the TV's original remote control. Using the source button.

The Beo4 VAUX button option

On your OneRemote modified Beo4 remote control, the VAUX button in the List-menu can be programmed, to open a specific source on your non B&O TV.

VAUX options

Enter one of these codes within 10 seconds, to select the source on the non B&O TV that will be selected with the VMEM or VTAPE button.

LIGHT	MENU	VAUX	0	1	PLAY	No new source selected.
LIGHT	MENU	VAUX	1	1	PLAY	The AV1 socket on the TV is opened.
LIGHT	MENU	VAUX	2	1	PLAY	The AV2 socket on the TV is opened.
LIGHT	MENU	VAUX	3	1	PLAY	The DTV tuner on the TV is opened.
LIGHT	MENU	VAUX	4	1	PLAY	The Component 1 socket is shifted to.
LIGHT	MENU	VAUX	5	1	PLAY	The Component 1 socket is accessed.
LIGHT	MENU	VAUX	6	1	PLAY	The HDMI 1 socket is accessed.
LIGHT	MENU	VAUX	7	1	PLAY	The HDMI 2 socket is accessed.
LIGHT	MENU	VAUX	8	1	PLAY	S-VHS 1
LIGHT	MENU	VAUX	9	1	PLAY	USB Wiselink

As the OneRemote controller is able to operate many different TV models, there might be some sources in the table, that is not available on your TV. The only way to find out if your TV accepts these codes, is testing each of the options.

If a source is not access able using these options, sources must be accessed the same way as using the TV's original remote control. Using the source button.



one>remote

Made in Denmark by www.oneremote.dk

35104373u3uk

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>