

PROW-8 Tabletop Proofer

Project _____

Item _____

Quantity _____



SIZE:

PROW-8 - 42-3/4" High, 24-1/4" Wide, 34-1/2" Deep
1086 mm High, 616 mm Wide, 876 mm Deep

NU-VU's PROW-8 tabletop proofer has a stainless steel exterior and tempered glass doors for full view of your product. These units feature the AutoMist humidity system, which eliminates the need for a water pan; however, it does require a 1/4" waterline connection. This feature utilizes a mist, which is sprayed directly onto a fan that distributes the heat and humidity evenly throughout the proofer cavity.

The PROW-8 has a capacity of 8 full size pans and 16 half-size pans.

CONSTRUCTION:

- Welded stainless steel
- Fully insulated
- Control panel accessible through front and top of unit
- Heating elements accessible inside of cabinet and through top

CONTROLS:

- Mechanical controls
- Indicator light for thermostat
- Separate heat and humidity controls

STANDARD FEATURES:

- Stainless steel exterior
- Aluminum interior
- Set of 4" adjustable legs
- Full view tempered glass door
- Silicone rubber door gasket
- AutoMist humidity system

OPTIONAL FEATURES:

- Warmer
- Set of four casters

LABORATORY CERTIFICATION AND APPROVAL




NU-VU® PROW-8 Tabletop Proofer



NU-VU® Food Service Systems


www.nu-vu.com
5600 13th Street
Menominee, MI 49858

1-800-338-9886 Toll Free
1-906-863-4401 Phone
1-906-863-5889 Fax



Approval / Stamp

PROW-8 Tabletop Proofer

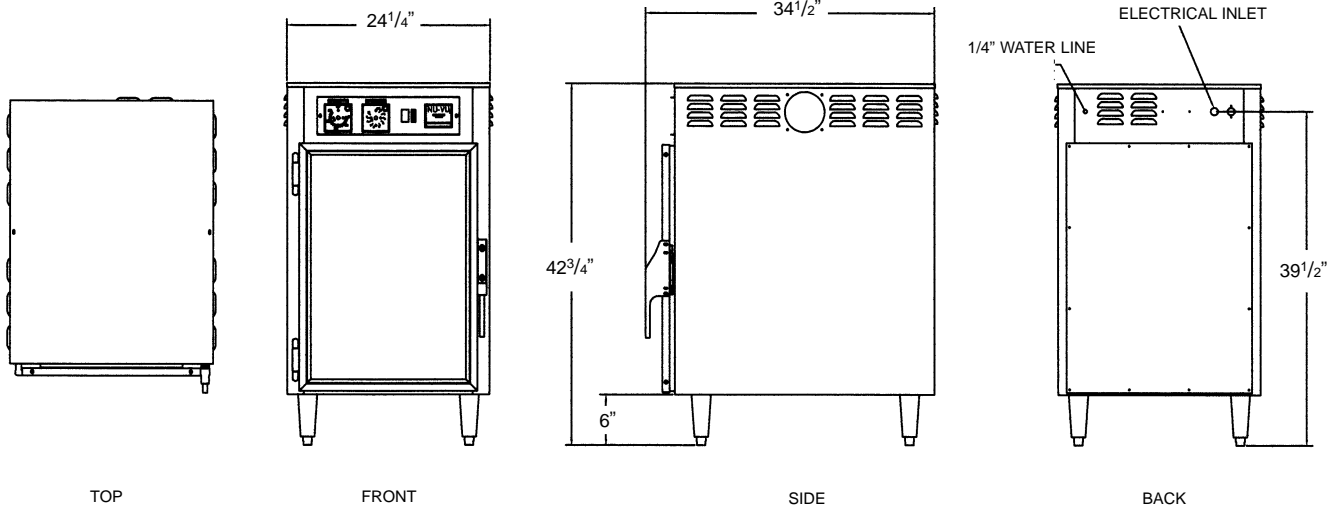

NU-VU® PROW-8 Tabletop Proofer

SPECIFICATIONS:

ELECTRICAL:

- 120-Volt single phase is standard.

SERVICE CONNECTIONS:

- Unit is shipped from factory with cord and plug.
- A 1/4" water line is required.
- NEMA 5-20 P

ELECTRICAL:

Amp Draw	120/1
L1	16

LISTINGS:

The PROW-8 has NSF and C-ETL-US listings.



INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Proofer	8	16	3-1/4"

DIMENSIONS:

	Height	Width	Depth
Exterior	42-3/4"	24-1/4"	34-1/2"
Interior	27"	18-1/2"	29"

DOOR SWING: Proofer - 24" (610 mm)

PACKING SIZE:

45" High, 36" Wide, 36" Deep
(1143 mm High, 914 mm Wide, 914 mm Deep)

SHIPPING WEIGHT:

230 Pounds (104 Kg), FOB Menominee, MI 49858

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>