





**PSW20 Series**  
**Pressure, vacuum or differential pressure switches**

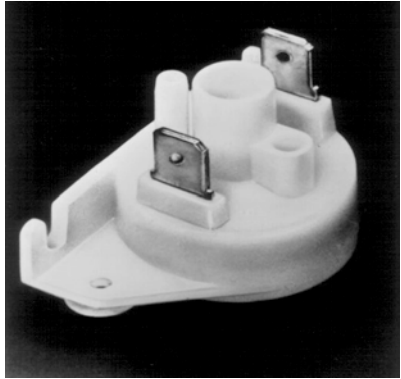

**M4067-0504**

Shop online at: [omega.com](http://omega.com) e-mail: [info@omega.com](mailto:info@omega.com)  
 For latest product manuals: [omegamannual.info](http://omegamannual.info)


**Installation Instructions for OMEGA PSW20 Series: Pressure, Vacuum and Differential Pressure Switches.**

**General**

The PSW20 series is single pole switch that can be used as a pressure or vacuum switch (from 0.40 in W. C. to 20 inches W. C.) or as a pressure differential switch. The switch can respond to rapid pulsing and the gold plated silver contacts will handle low level switching currents.

**Mounting Instructions**

Switch may be mounted in horizontal or vertical position, through 0.12" (3mm) holes on 1.34" (34mm) centerline, with suitable clearances to accommodate 0.15" I.D tubing and electrical connectors – see diagram for dimensions.

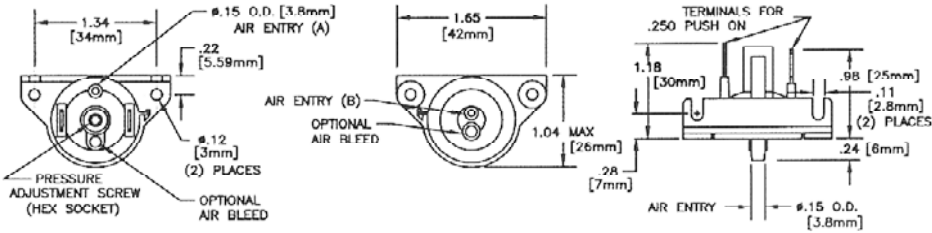

**Electrical, Pneumatic and Material/Mechanical Specification**

Part Number	Pressure range (inches water, gauge)		
	Pressure	Vacuum	Differential
PSW20A	0.4-15	0.4-15	.04-15
PSW20B	1-20	1-20	1-20

Part Number	Standard Electrical rating		Repeat Accuracy	Contact Resistance (ohms)
	Max. Resistive	Min Resistive	Constant Temperature	
PSW20A	750ma 250VAC	5 ma 3 VDC	+/- 4%	0.04
PSW20B	1 amp 250 VAC	5 ma 3 VDC	+/- 3%	0.02

Body	Acetal
Diaphragm	EPDM is standard; Nitrile available. NOTE: EPDM should not be used in petroleum applications
Contacts	Gold plated silver
Springs	Plated phosphor bronze
Terminals	Plated copper or brass
Adjusting screw	Stainless steel or zinc plated SS
Weight	9 grams (0.3oz)
Operating temperature	-30 C to +65 C (-23F to 149F)
Listings	UL recognized for 100,000 operations CSA certified

## **Connections and Adjustment**

### **Pressure Switching – Normally Open Contacts**

Connect the pressure source to inlet port B (see diagram) and set the adjusting screw to the desired pressure. Turning the screw clockwise narrows the gap between contacts and decreases the pressure set point. Turning the pressure adjusting screw counterclockwise increases the set point. Note: the media entering the diaphragm through Port B is separated from the electrical contacts by the diaphragm.

### **Pressure Switching – Normally Closed Contacts**

Connect the pressure source to Port A and monitor continuity across the terminals. Slowly turn the adjusting screw clockwise, narrowing the gap between contacts until the contacts are closed. Apply the set point pressure which will open the contacts. Continue to turn the adjusting screw clockwise until the contacts make and break at the desired point.


### **Vacuum Switching**

Repeat the above procedure using Port A for Normally Open Contacts and Port B for Normally Closed Contacts.


## Media in Contact with Electrical Contacts

Note that the pressure media entering through Port A is in direct contact with the electrical contacts in the switch, whereas the pressure media entering through Port B is separated from the electrical contacts by the diaphragm.

Note: The EPDM diaphragm should not be used with petroleum products. Specify Nitrile for these applications.

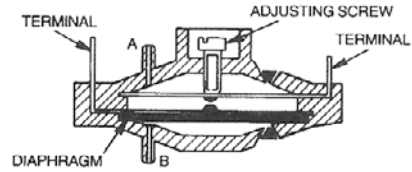

CONTACTS SET NORMALLY OPEN  
PORT A: VACUUM N.O.  
PORT B: PRESSURE N.O.



CONTACTS SET NORMALLY CLOSED  
PORT A: PRESSURE N.C.  
PORT B: VACUUM N.C.



<b>OMEGAnet® Online Service</b> <a href="http://www.omega.com">www.omega.com</a>	<b>Internet e-mail</b> <a href="mailto:info@omega.com">info@omega.com</a>
---	--

### Servicing North America:

**USA:** One Omega Drive, Box 4047  
 ISO 9001 Certified Stamford CT 06907-0047  
 Tel: (203) 359-1660 FAX: (203) 359-7700  
 e-mail: [info@omega.com](mailto:info@omega.com)

**Canada:** 976 Bergar  
 Laval (Quebec) H7L 5A1, Canada  
 Tel: (514) 856-6928 FAX: (514) 856-6886  
 e-mail: [info@omega.com](mailto:info@omega.com)

### For immediate technical or application assistance:

**USA and Canada:** Sales Service: 1-800-826-6342 / 1-800-TC-OMEGA®  
 Customer Service: 1-800-622-2378 / 1-800-622-BEST®  
 Engineering Service: 1-800-872-9436 / 1-800-USA-WHEN®  
 TELEX: 996404 EASYLINK: 62968934 CABLE: OMEGA

**Mexico:** En Español: (001) 203-359-7803 e-mail: [espanol@omega.com](mailto:espanol@omega.com)  
 FAX: (001) 203-359-7807 [info@omega.com.mx](mailto:info@omega.com.mx)

### Servicing Europe:

**Benelux:** Postbus 8034, 1180 LA Amstelveen, The Netherlands  
 Tel: +31 (0)20 3472121 FAX: +31 (0)20 6434643  
 Toll Free in Benelux: 0800 0993344  
 e-mail: [sales@omegaeng.nl](mailto:sales@omegaeng.nl)

**Czech Republic:** Frystatska 184, 733 01 Karviná, Czech Republic  
 Tel: +420 (0)59 6311899 FAX: +420 (0)59 6311114  
 Toll Free: 0800-1-66342 e-mail: [info@omegashop.cz](mailto:info@omegashop.cz)

**France:** 11, rue Jacques Cartier, 78280 Guyancourt, France  
 Tel: +33 (0)1 61 37 2900 FAX: +33 (0)1 30 57 5427  
 Toll Free in France: 0800 466 342  
 e-mail: [sales@omega.fr](mailto:sales@omega.fr)

**Germany/Austria:** Daimlerstrasse 26, D-75392 Deckenpfronn, Germany  
 Tel: +49 (0)7056 9398-0 FAX: +49 (0)7056 9398-29  
 Toll Free in Germany: 0800 639 7678  
 e-mail: [info@omega.de](mailto:info@omega.de)

**United Kingdom:** One Omega Drive, River Bend Technology Centre  
 ISO 9002 Certified Northbank, Irlam, Manchester  
 M44 5BD United Kingdom  
 Tel: +44 (0)161 777 6611 FAX: +44 (0)161 777 6622  
 Toll Free in United Kingdom: 0800-488-488  
 e-mail: [sales@omega.co.uk](mailto:sales@omega.co.uk)

It is the policy of OMEGA to comply with all worldwide safety and EMC/EMI regulations that apply. OMEGA is constantly pursuing certification of its products to the European New Approach Directives. OMEGA will add the CE mark to every appropriate device upon certification.

The information contained in this document is believed to be correct, but OMEGA Engineering, Inc. accepts no liability for any errors it contains, and reserves the right to alter specifications without notice. **WARNING:** These products are not designed for use in, and should not be used for, human applications.

## WARRANTY/DISCLAIMER

OMEGA ENGINEERING, INC. warrants this unit to be free of defects in materials and workmanship for a period of **13 months** from date of purchase. OMEGA's WARRANTY adds an additional one (1) month grace period to the normal **one (1) year product warranty** to cover handling and shipping time. This ensures that OMEGA's customers receive maximum coverage on each product.

If the unit malfunctions, it must be returned to the factory for evaluation. OMEGA's Customer Service Department will issue an Authorized Return (AR) number immediately upon phone or written request. Upon examination by OMEGA, if the unit is found to be defective, it will be repaired or replaced at no charge. OMEGA's WARRANTY does not apply to defects resulting from any action of the purchaser, including but not limited to mishandling, improper interfacing, operation outside of design limits, improper repair, or unauthorized modification. This WARRANTY is VOID if the unit shows evidence of having been tampered with or shows evidence of having been damaged as a result of excessive corrosion; or current, heat, moisture or vibration; improper specification; misapplication; misuse or other operating conditions outside of OMEGA's control. Components which wear are not warranted, including but not limited to contact points, fuses, and triacs.

**OMEGA is pleased to offer suggestions on the use of its various products. However, OMEGA neither assumes responsibility for any omissions or errors nor assumes liability for any damages that result from the use of its products in accordance with information provided by OMEGA, either verbal or written. OMEGA warrants only that the parts manufactured by it will be as specified and free of defects. OMEGA MAKES NO OTHER WARRANTIES OR REPRESENTATIONS OF ANY KIND WHATSOEVER, EXPRESS OR IMPLIED, EXCEPT THAT OF TITLE, AND ALL IMPLIED WARRANTIES INCLUDING ANY WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED. LIMITATION OF LIABILITY: The remedies of purchaser set forth herein are exclusive, and the total liability of OMEGA with respect to this order, whether based on contract, warranty, negligence, indemnification, strict liability or otherwise, shall not exceed the purchase price of the component upon which liability is based. In no event shall OMEGA be liable for consequential, incidental or special damages.**

CONDITIONS: Equipment sold by OMEGA is not intended to be used, nor shall it be used: (1) as a "Basic Component" under 10 CFR 21 (NRC), used in or with any nuclear installation or activity; or (2) in medical applications or used on humans. Should any Product(s) be used in or with any nuclear installation or activity, medical application, used on humans, or misused in any way, OMEGA assumes no responsibility as set forth in our basic WARRANTY/DISCLAIMER language, and, additionally, purchaser will indemnify OMEGA and hold OMEGA harmless from any liability or damage whatsoever arising out of the use of the Product(s) in such a manner.

## RETURN REQUESTS / INQUIRIES

Direct all warranty and repair requests/inquiries to the OMEGA Customer Service Department. BEFORE RETURNING ANY PRODUCT(S) TO OMEGA, PURCHASER MUST OBTAIN AN AUTHORIZED RETURN (AR) NUMBER FROM OMEGA'S CUSTOMER SERVICE DEPARTMENT (IN ORDER TO AVOID PROCESSING DELAYS). The assigned AR number should then be marked on the outside of the return package and on any correspondence.

The purchaser is responsible for shipping charges, freight, insurance and proper packaging to prevent breakage in transit.

PATENT NOTICE: U. S. Pat. No. 6,074,089; 5,465,838 / Canada 2,228,333; 2,116,055 / UK GB 2,321,712 / Holland 1008153 / Israel 123052 / France 2 762 908 / EPO 0614194. Other patents pending.

FOR **WARRANTY** RETURNS, please have the following information available BEFORE contacting OMEGA:

1. Purchase Order number under which the product was PURCHASED,
2. Model and serial number of the product under warranty, and
3. Repair instructions and/or specific problems relative to the product.

FOR **NON-WARRANTY** REPAIRS, consult OMEGA for current repair charges. Have the following information available BEFORE contacting OMEGA:

1. Purchase Order number to cover the COST of the repair,
2. Model and serial number of the product, and
3. Repair instructions and/or specific problems relative to the product.

OMEGA's policy is to make running changes, not model changes, whenever an improvement is possible. This affords our customers the latest in technology and engineering.

OMEGA is a registered trademark of OMEGA ENGINEERING, INC.

© Copyright 2004 OMEGA ENGINEERING, INC. All rights reserved. This document may not be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form, in whole or in part, without the prior written consent of OMEGA ENGINEERING, INC.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>