

Model 701i/202
 Model 703i/203
 Surface Mount Speakers*



FEATURES	GENERAL SPECS	701i/202	703i/203
<ul style="list-style-type: none"> Professional Commercial Speaker SELECTABLE SWITCH – 70 V and 8 Ω Combination 70 V Transformer Tap – 2.5, 5, 10, 15 W Weatherized Aluminum Casing, Grill and Bracket Ceiling or Wall Mount Possibilities with the Included "U" Mount Bracket Black or White 5 Year Warranty 	Description: Enclosure: Outdoor Rated: Selectable Switch: 70 V Transformer Tap: Sensitivity (1W / 1M): Power handling (8 Ohm): Frequency response: Crossover: Dispersion (Horiz/Vert): Woofer Diameter: Woofer Material: Tweeter(s): Tweeter Size: Tweeter Material: Grill Material: Dimensions (HxWxD): Weight: "U" Mount Bracket: Color(s):	4", 2-Way Speaker Aluminum Diecast Yes 70 V and 8 Ω Combination 2.5, 5, 10, 15 Watts 88 dB 80 W Max., 40 W Nom. 90 Hz - 20 kHz 6 kHz 140° 4" Paper Coated / Rubber Surround 1 ea. .5" (13 mm) Dome PEI Aluminum 7" x 4.5" x 4" 5.2 Lbs. Included Black, White	4", 3-Way Speaker Aluminum Diecast Yes 70 V and 8 Ω Combination 2.5, 5, 10, 15 Watts 88 dB 100 W Max., 50 W Nom. 90 Hz - 20 kHz 9 kHz 140° 4" Paper Coated / Rubber Surround 2 ea. .6" (15 mm) Piezo / .5" (13 mm) Dome PEI Aluminum 4.5" x 4" x 7" 4.7 Lbs. Included Black, White

* 701i/202 Replaces Models 201, 202, 701 and 702
 703i/203 Replaces Models 203 and 703






Model 701i/202
Model 703i/203
Surface Mount Speakers*



GENERAL SPECS	701i/202	703i/203	OPTIONS AVAILABLE
Description:	4", 2-Way Speaker	4", 3-way Speaker	SS36 – 36" In-Ground Stainless Steel Stake
Enclosure:	Aluminum Diecast	Aluminum Diecast	Attenuators:
Outdoor Rated:	Yes	Yes	OWI1070M – Mono, 70 V, 10 W Max.
SELECTABLE SWITCH:	70 V and 8 Ω Combination	70 V and 8 Ω Combination	OWI3570M – Mono, 70V, 35 W Max.
70 V Transformer Tap:	2.5, 5, 10, 15 Watts	2.5, 5, 10, 15 Watts	OWI7570M – Mono, 70 V, 75 W Max.
Sensitivity (1W / 1M):	88 dB	88 dB	OWI2570S – Stereo, 70 V, 25 W Max.
Power handling (8 Ohm):	80 W Max., 40 W Nom.	100 W Max., 50 W Nom.	Volume Controls:
Frequency response:	90 Hz - 20 kHz	90 Hz - 20 kHz	25WPVC – 25W, Waterproof, Impedance Matching
Crossover:	6 kHz	9 kHz	72WPVC – 72 W, Waterproof, Impedance Matching
Dispersion (Horiz/Vert):	140°	140°	
Woofer Diameter:	4"	4"	
Woofer Material:	Paper Coated / Rubber Surround	Paper Coated / Rubber Surround	
Tweeter(s):	1 ea.	2 ea.	
Tweeter Size:	.5" (13 mm) Dome	.6" (15 mm) Piezo / .5" (13 mm) Dome	
Tweeter Material:	PEI	PEI	
Grill Material:	Aluminum	Aluminum	Engineered in the USA
Dimensions (HxWxD):	7" x 4.5" x 4"	4.5" x 4" x 7"	Made in China
Weight:	5.2 Lbs.	4.7 Lbs.	
"U" Mount Bracket:	Included	Included	* 701i/202 Replaces Models 201, 202, 701 and 702
Color(s):	Black, White	Black, White	703i/203 Replaces Models 203 and 703
Warranty:	5 Years	5 Years	

POLAR CHARTS

FREQUENCY RESPONSE CHARTS

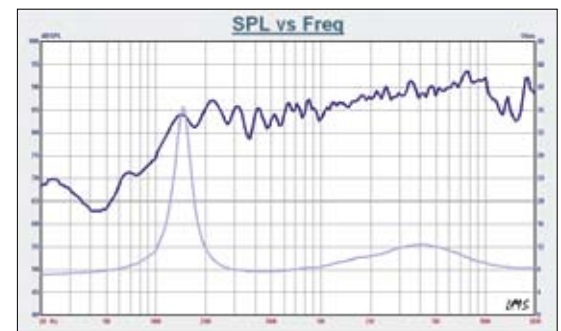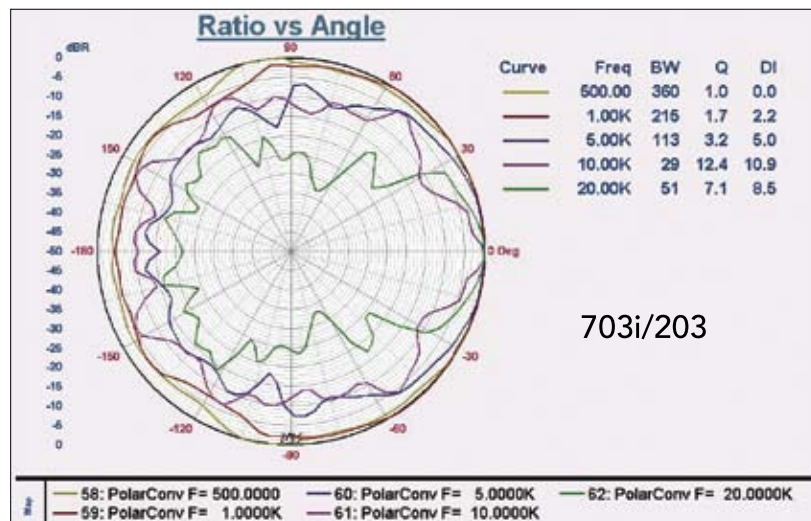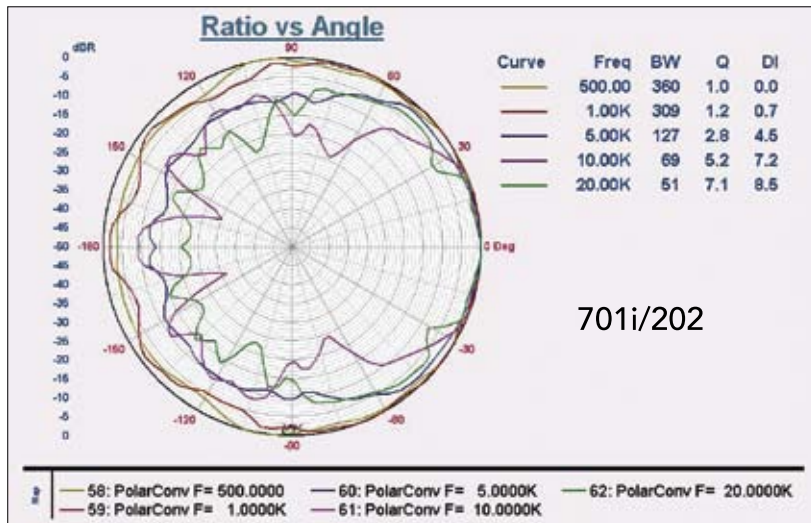

OWI, Inc.
 17141 Kingsview Ave.
 Carson, CA 90746 USA
 ph. 310.515.1900
 toll free 800.638.1694
 fax 310.515.1606
 email info@owi-inc.com
 web www.owi-inc.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>