

# ORECK<sup>®</sup> XL


SIMPLY AMAZING<sup>®</sup>

# ORECK<sup>®</sup>

Oreck Corporation  
100 Plantation Road  
New Orleans, LA 70123

**USER'S GUIDE**  
Multi-Purpose Automotive  
Vacuum and Light

## XLAUTO

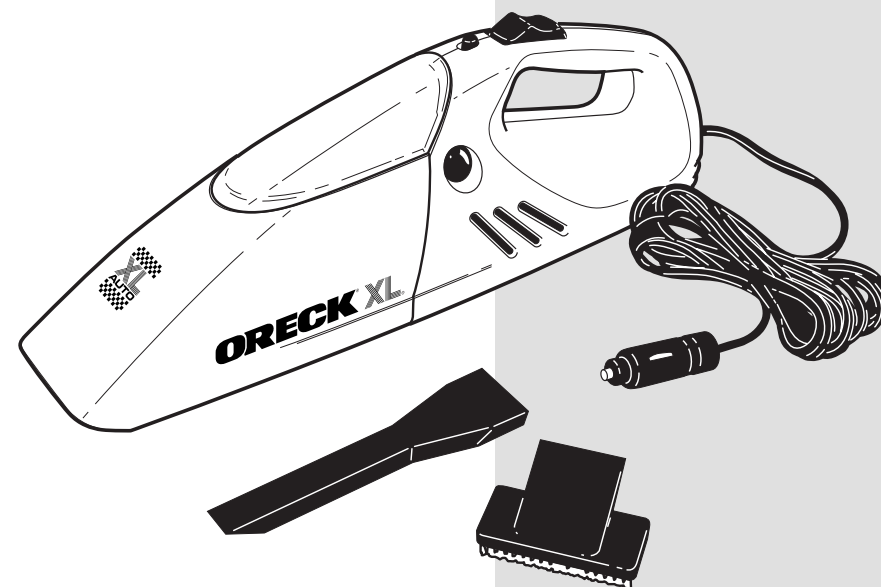

**•IMPORTANT•**  
SAVE THIS BOOKLET!

Includes:  
Important Safety Instructions  
Warranty  
Operating Instructions

**REGISTER YOUR PRODUCT  
ON THE WEB:  
WWW.ORECK.COM**

# IMPORTANT SAFETY INSTRUCTIONS

This owner's manual contains **IMPORTANT SAFETY INSTRUCTIONS.**

First and foremost, when using an auto 12 volt vacuum basic precautions should always be followed.

**READ ALL INSTRUCTIONS BEFORE USING THIS VACUUM CLEANER**

## WARNING

To reduce the risk of fire, electric shock, or injury to persons:

- Read and follow instructions
- Use only for intended use as described in this manual. Do not use other than manufacturer's recommended attachments.
- Do not operate with damaged cord, or cigarette lighter adaptor. If appliance is not working properly, has been dropped, damaged, exposed to weather or dropped in water, return it to a service center for examination and repair. Do not disassemble the cleaner, it is not user serviceable.
- Do not use a damaged cord. Replace immediately.
- Do not abuse the cord. Do not carry the vac by its cord or pull on the cord.
- Do not use an extension cord. Plug directly into cigarette lighter.
- Do not operate with any opening blocked; keep free of dust, lint, hair, and the like.
- Do not put any object into openings.
- Keep hair, loose clothing, fingers, and the like away from any openings and moving parts.
- Do not pick up cigarettes, hot ashes, matches, or similar materials.
- Do not pick up flammable or combustible liquids such as gasoline, or use in areas where they may be present.
- Do not operate without filter bag and dust cup in place.
- Close supervision is necessary when used by or near children. Do not allow to be used as a toy.
- Do not operate the Oreck Auto 12V when the vehicle's engine is running.
- Store in a safe place.

**SAVE THESE INSTRUCTIONS**


## Warranty

Oreck Corp. warrants that all new automotive vacuums are free from defects in material and workmanship under normal, non-commercial use and service. Oreck will remedy any such defects if they appear within 1 year from date of purchase. This warranty gives you specific legal rights, and you may have other rights which vary state to state.

Register your product on the web:

[WWW.ORECK.COM](http://WWW.ORECK.COM)

## Parts

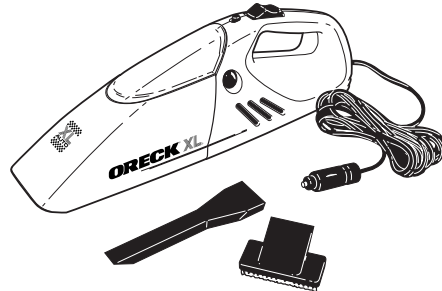

- Lighted Automotive Vac
- 15 ft. 12V Power Cord
- Crevice Tool (40110-01)
- Brush Tool (40109-01)

### Replacement Parts (Sold Separately)

Bulb w/Reflector Assembly	40111-01
Dust Filter	40113-01

### Specifications

Power Supply	12 Volt D.C.
Operating Temperature	40-100 degrees F
Cord Length	15 ft.

## Repair or Replacement

Your ORECK Car Vac is a product of precise engineering. If you require additional information or have problems with your Oreck product, you may call ORECK CUSTOMER SERVICE at:

**US: 1-800-989-3535 Canada: 1-888-676-7325**

Please specify the product and model number.


Save your sales or purchase slip. Should your Oreck product require warranty service in the U.S.A., present this slip to the Authorized Service Center as your proof of purchase date or, in Canada, call customer service.

## Operating Instructions

Remove cigarette lighter from storage receptacle. Insert the adaptor into the cigarette lighter socket.


**NOTE: Ensure adapter is fully inserted into the lighter socket.**

Push the power switch forward to operate vacuum.

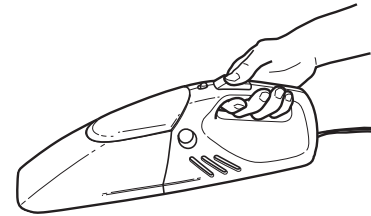


### Using the Light

The light can be switched on and off, using the switch located on top in front of the ON/OFF switch.

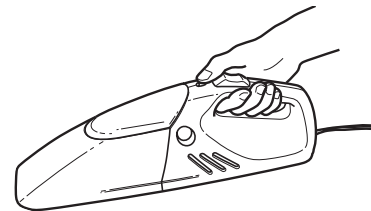


### Using Attachments

To use the attachments (i.e. the crevice tool and brush tool), simply push the required tool into the nozzle as shown.

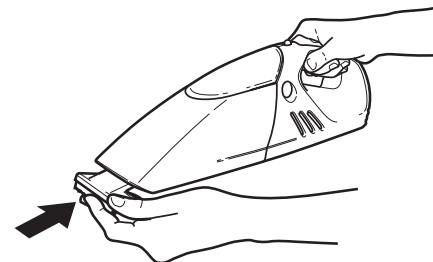


The crevice tool is stored on the back bottom of the vacuum. To remove tool, simply slide out of slot. Replace tool when finished to prevent loss.

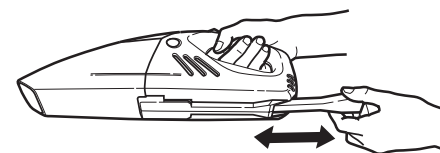


## Cord Storage

To store the cord and plug, fold cord and tie with the cord strap attached to cord. Place cord plug into the plug storage compartment.

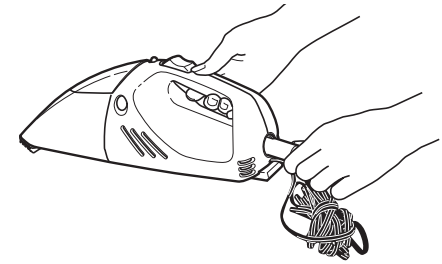


## Cleaning

To remove the dust container, press down on the release button and gently tilt the dust container forward as shown.

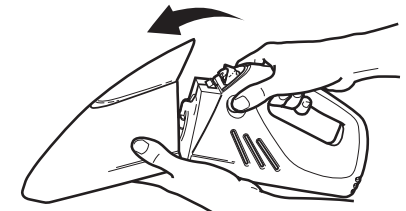

Remove the filter from the dust container and clean.

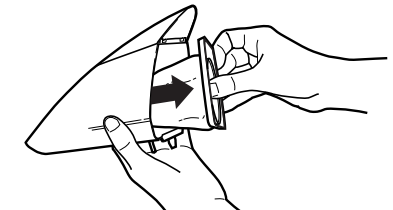


Empty, wash and dry the inside of the dust container. Make sure the dust container is dry and replace the filter before reusing.

Replace dust container by attaching bottom of container with vacuum and raising up to lock in place.

### Bulb Replacement

To replace the light, simply push the bulb in and twist counter-clockwise to remove bulb. Insert new bulb push and twist clockwise to replace.



**NOTE: Make sure you use the same type of bulb when replacing the old bulb (12V).**

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>