

PARTS LIST		
REF	DESCRIPTION	PART NO.
CB1	Circuit Breaker 1 AMP	263562
L1	Pilot Lamp 117 VAC	113209
T1	Transformer	275577
D1, D2	Diode 10 AMP 50 V	111104
C1, C2	Capacitor 4700 MF 50 V	253715
F1	Fuse, AGC2	111236
-	PC Board Assembly	275675
Q1	Transistor 2N3053	111031
Q2	Transistor 2N3055	111023
U1	Regulator LM723	275577
D3	Zener Diode 36 V	257667
C4	Capcitor 100 PF Dsic	110353
C5	Capcitor 100 MF 35 V	188401
R1	Resistor 220 ohm 1/2 Watt	186561
R2	Resistor 330 ohm 1/2 Watt	110795
R3	Resistor .12 ohm 5 Watt	275589
R4	Trimpot 5K	244370
R5	Resistor 4.7K 1/2 Watt	110485
R6	Resistor 1.5K 1/2 Watt	110515





MODEL	INPUT	OUTPUT (NOMINAL)	RIPPLE @ FULL LOAD	REGULATION 0 - FULL LOAD	PILOT LAMP	FUSE	SIZE L x W x H	WEIGHT
PS24-2R	105-125 VAC 60 Hz, 110 W	24 VDC 2 AMPS	.5m	500mV	X	Primary Secondary	13 1/4" x 6 1/4" x 4 1/4" 337mm x 159mm x 121mm	15.5lbs.

RACK MOUNT ACCESSORY SHELF (MODEL PS-RK)

Size (L x W x H):
19" x 8" x 5 1/4"
(483mm x 203mm x 133mm)

• Plug provided for viewing hole when not mounting 13 1/4" L chassis

• Holds up to (4) 6 1/4" L chassis or (1) 13 1/4" L chassis

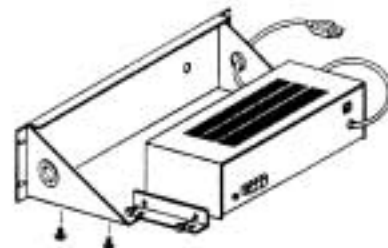

Specifications are subject to change without notice



AtlasSound.com

1601 JACK MCKAY BOULEVARD ENNIS, TEXAS 75119 U.S.A. • TELEPHONE: (800) 876-3332 • FAX: (800) 765-3435

©2002 ATLAS SOUND LP

Printed in U.S.A.

00402

ATS001212 Rev A 04/02

PN 263856

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>