



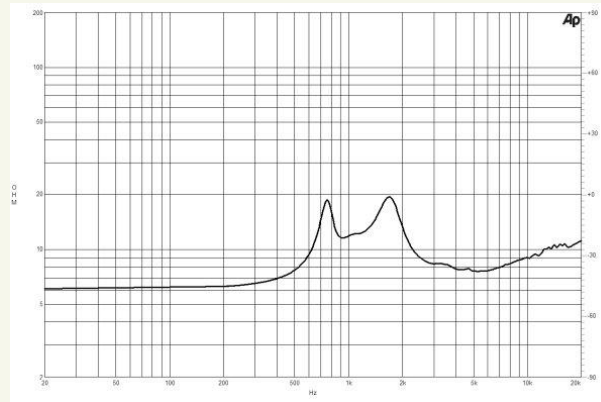

# DE400 | HF Drivers

100 W continuous program power capacity  
 1" horn throat diameter  
 44 mm (1.7 in) aluminium voice coil  
 Polyimide diaphragm  
 1200 – 18000 Hz response  
 108.5 dB sensitivity  
 Compact Neodymium magnet assembly

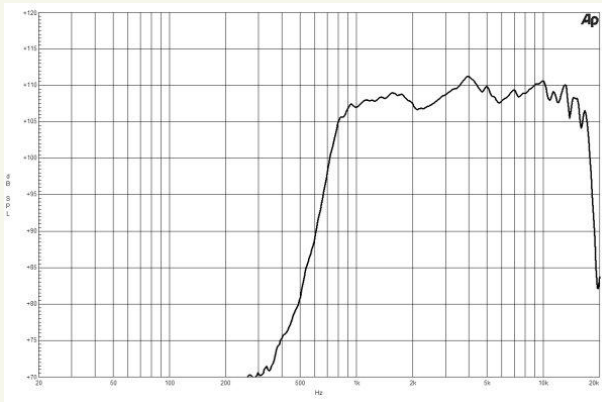

## Specifications

Throat Diameter (1)	25 mm (1 in)
Nominal Impedance (2)	8 ohm
Minimum Impedance	7.7 ohm
Nominal Power Handling (3)	50 W
Continuous Power Handling (4)	100 W
Sensitivity (1W/1m) (5)	108.5 dB
Frequency Range	1.2 -18 kHz
Recommended Crossover (6)	1.6 kHz
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Diaphragm Material	Polyimide
Flux Density	1.8 T

## Mounting and Shipping Info

Two M6 holes 180° on 76 mm (3 in) diameter

Overall Diameter	85 mm (3.3 in)
Depth	44 mm (1.7 in)
Net Weight (1 unit)	0.8 kg (1.8 lb)
Shipping Weight (8 units)	6.7 kg (14.7 lb)
Shipping Box (8 units)	220x220x150 mm (8.7x8.7x5.9 in)

- <sup>1</sup>Driver mounted on B&C ME45 horn
- <sup>2</sup>Also available in 16 ohms, data upon request
- <sup>3</sup>2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance.
- <sup>4</sup>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- <sup>5</sup>Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.
- <sup>6</sup>12 dB/oct. or higher slope high-pass filter.

LF Drivers | Coaxials | HF Drivers | Horns



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>