

# LCS2740

27 INCH ENHANCED DEFINITION PROFESSIONAL GRADE LCD MONITOR  
-with RS232C and integrated audio amplifier




The LCS2740 is a professional grade LCD monitor designed for public display, digital signage, financial, broadcast, entertainment and transportation applications. The LCS2740 features full metal construction, integrated audio amplifier, 1366 x 768 native resolution, extremely fast 6.5ms response time for crystal clear video performance and RS232C for external control.

With its slim design, super wide viewing angle, high color saturation and color accuracy, low power consumption and long service life the LCS2740 is the perfect choice for your next project.

## Features

- Durable Metal Construction
- Picture in Picture, Picture and Picture
- Fanless Design for Quiet Operation
- Anti-Reflective Coated LCD panels
- 176+ Degree H / V Viewing Angle
- Infrared and RS232C Control
- VESA Mounting Hole Pattern
- Integrated Audio Amplifier
- One Year Parts & Labor Warranty
- Extended Warranties Available

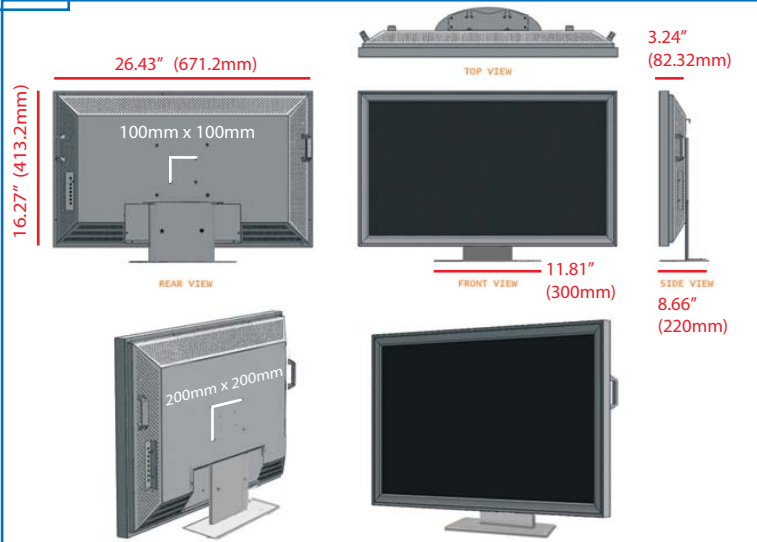

## Specifications

Technology:	TFT LCD	Inputs:	DVI-D, VGA (D15), S-Video, Composite Video, Component video (YPbPr, YCbCr)	Compliance:	FCC, CE, cUL
Screen diagonal:	27" (686 mm)	Resolutions Supported:	NTSC/PAL/SECAM, 720i/p, 1080i/p, XGA, WXGA, SXGA, RS232C, RS485	Weight:	26.46lbs (12kg)
Screen area:	23.74" x 13.46" (603 x 341 mm)	Control:	VESA 100x100, 200x200mm	Gross Weight:	35.28lbs (16kg)
Resolution:	1366 x 768	Mounting:	100 - 240V (50Hz-60Hz)	Included Accessories:	Power cord, D-SUB 15pin cable, DVI-D 24 pin cable, S-VIDEO cable, Component Mini Din 8 pin cable, RCA cable, Remote control, User's manual
Brightness:	500 cd/m2	Voltage:		<b>OPTIONS</b>	
Contrast ratio:	1200:1	Power:		• Tempered Glass	
Colors:	16.7 million	Consumption:	<100W (On) <15W Stand-By	• Bottom or Side Speakers	
Lifetime:	50,000h average	Operating Temp:	41° to 104°F (5° to 40°C)	• Open Frame Versions Available	
Color gamut:	76% NTSC	Op. Humidity:	20 - 80%		
Aspect ratio:	16:9				
Viewing angle:	176°/176°				
Response time:	6.5ms GtoG				
Color Control:	3200K-9300K, User				

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>