

# PHANTOM POWER SUPPLY INSTRUCTION MANUAL

## Features :

- Two XLR microphone inputs and outputs.
- Adjustable AC voltage selector :  
100 / 115 / 220 / 240
- Phantom power supply for condenser microphones.
- Lightweight.
- An Easy to read power on/off LED indicator.



## Precautions :

- Do not touch the power cable or the cabinet with wet hands.
- When removing the power plug from the power socket.  
Hold the plug firmly, do not pull the cable.
- A damaged main power cable may cause an electric shock or fire hazard.
- When the unit will not be used for a long period, disconnect the power cable from the power socket.
- Do not use or store the unit under sunlight directly or near heat-generating equipments.
- Do not use or store the unit near any source of liquid or in any wet environment.
- Do not attempt to disassemble the unit.

## Specifications :

DC Voltage output : 48V DC  $\pm$  2 V

Frequency response : 20Hz to 20KHz(600 ohms balance)


Total current : 60mA maximum

Power consumption : 7 Watt

Dimensions : 180mm(L) $\times$ 145mm (W) $\times$ 50mm(H)

Weight : 1.2Kgs

Operating Voltages : Please adjust the selector (shown on the right) as the local voltage required.

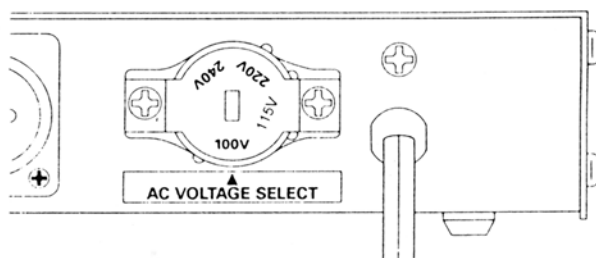

HCPH020000

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>