




Setup


01 Remove the stroller from box with wheels facing down. Release the side plastic Fold Lock.

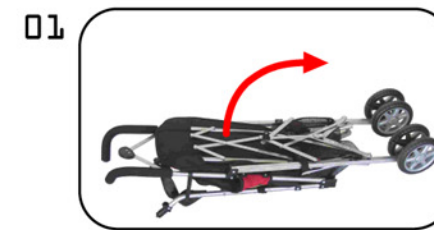

02 Raise the handles upwards to open.




03 Press the Main Lock ① at the back of the stroller downwards to lock, ensuring the 2nd Lock ② and the Top Lock ③ are engaged and functioning.

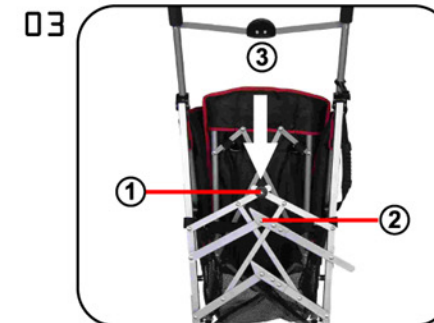


Safety Bar

04 If required, attach the safety bar to the side tubes below the hinge and clip. **Important: safety bar must be removed to fold stroller.**

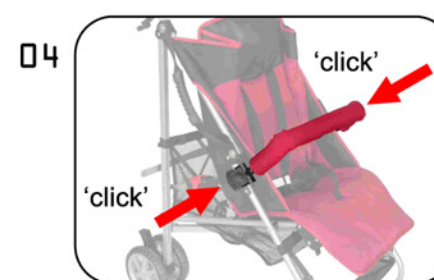

Wheel Assembly

05 To assemble front wheels, insert the plastic frame spindle (A) into the wheel housing (B) until it clicks. Check wheel is secure.

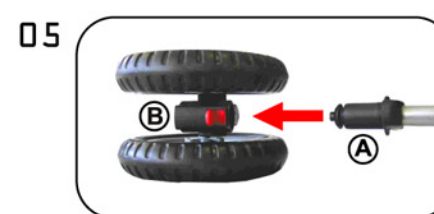

06 Clip the sunhood canopy to the side tubes above the main hinge. Lock the sunhood forward by pressing downwards on the side levers.




Operating the Brakes

07 Engage brake by pushing lever down and back with foot.


Important: always engage both brakes when stroller is stationary.

To release brake, lift brake upwards with foot.

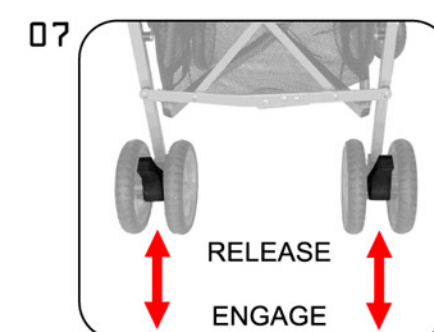

Safety Harness


08 Always secure your child with the safety harness. To fasten, clip both side tongues into the main buckle.

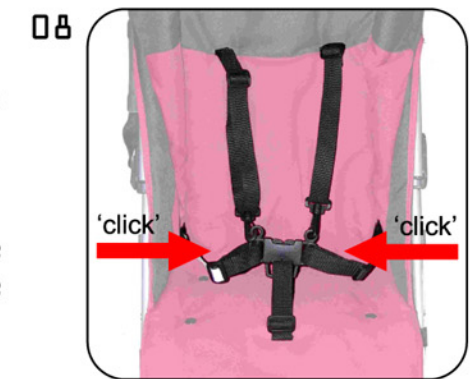

Adjust each shoulder, waist and crotch strap for a firm fit. To release - press the clips on each side of the buckle.


Operation of Swivel Wheel

09 To fix the front wheels, set the wheels straight and raise the red lever until it clips into place. To return to the swivel mode, depress the red lever.

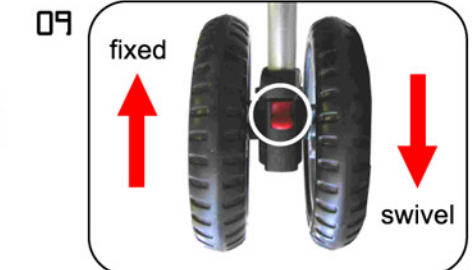

Adjusting the Seat Back

10 To lower the seat back angle, press the red levers located behind the seat on each side of stroller. To return seat upright, lift the seat back forward.

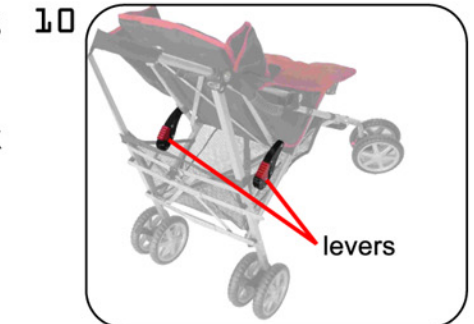

Adjusting the Seat Front

11 To raise, lift the front and the levers will automatically engage. To lower, depress the levers on each side and push down.




Folding the Stroller


12 Remove the safety bar if attached.

Lift the Main Lock ① up and to the left. Press down on the side of the 2nd Lock ② to release and lift the Top Lock ③.

Press the handles forward to fold.

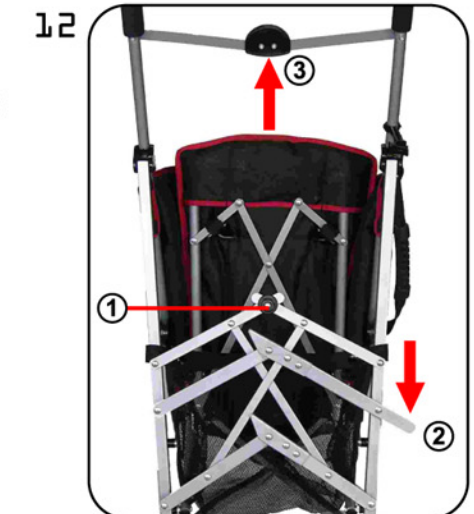

13 Secure folded stroller by attaching the side plastic Fold Lock to the front tube.

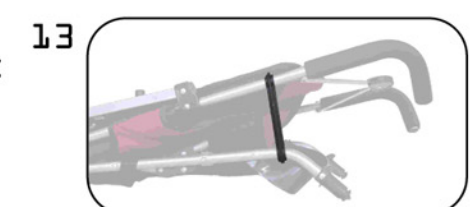

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>