

Dual Mode CCD Box Internet Camera



Equipped with MPEG-4 and M-JPEG video streaming, the PLANET ICA-750 is a Dual Mode CCD Box Internet Camera which is designed for professional security and high-quality video / audio requirement. The manual Day / Night switch with ICR (IR-cut filter Removable), CS-Mount optical lens and PoE (Power over Ethernet) features provides the most flexibility of IP surveillance.

PLANET ICA-750 supports 2-Way audio that can directly make audio communication between local and remote side by using the built-in microphone and adding an external speaker. Besides web browsers, the ICA-750 also provides 3GPP capability which can let the administrators remotely view the live video via a 3G mobile phone. With DI / DO ports, users are allowed to connect external sensors or alarm devices to improve the security system with more advanced function.

The professional management software - PLANET Cam Viewer, is a multi-camera video surveillance application which can handle ICA-750 to provide monitoring, recording and event management functions. That offers you to setup a comprehensive and effective surveillance system quickly and easily. ICA-750 is an all-functioned network camera and suitable for many occasions that could express high-quality video / audio to everywhere in the world. It can provide a real professional security environment to protect your property and your life.

KEY FEATURE

- Day / Night Switch with ICR (IR-cut filter removable)
- MPEG-4 and M-JPEG dual codec
- 2-Way Audio supported
- 3GPP for 3G mobile remote application
- Provides 4 Motion Detection area
- E-mail Alert by motion detection and input I/O
- Up to 30 fps for all resolution
- Built-in microphone and external microphone / speaker
- PoE (IEEE 802.3af) supported
- User definable HTTP and HTTPS port number
- External I/O trigger for various surveillance applications
- Cam Viewer, Central management software supported Application


SPECIFICATION

Product **Dual Mode CCD Box Internet Camera**

Model	ICA-750
Video	
Image Sensor	1/4" Sony CCD, VGA Resolution
Lens	F1.6 Fixed Focus, CS Mount Type, 4 Layers Glass
Video Codec	MPEG-4 and M-JPEG Dual Stream
Resolution	640 x 480, 320 x 240, 160 x 120
Frame Rate	Up to 30 fps @all resolution
Image Control	AWB, AEC, AGC, Contrast, Brightness auto-iris Control
3GPP	160 x 120 @15fs, MPEG-4 for mobile phone viewing
Audio	
Audio Codec	G.726 ADPCM, G.711 PCM
Microphone / Speaker	Bi-directional, Built-in Microphone and external Microphone / Speaker
Interface	
LAN	1 x RJ-45, 10/100Base-TX, Auto MDI / MDI-X, IEEE802.3af
AUDIO	1 x Audio In, 1 x Audio Out
DI / DO	2 x Digital In, 2 x Digital Out
Network	
Protocols	TCP / IP, SMTP, HTTP, DHCP, NTP, RTSP / RTP, UPnP, FTP, DDNS, HTTPS, SYSLOG, JABBER
Management	
Client	Web browser, Cam Viewer software
Security	Username and Password, HTTPS, IP Filter
Motion Detection	4 Area definable
E-mail Notification	Triggered by motion detection and input I/O
Environment	
Power Requirement	12V DC, 1A
Dimensions (W x D x H)	81 x 130 x 50 mm
Weight	480 g
Emission	CE, FCC

APPLICATIONS

Remote monitoring application

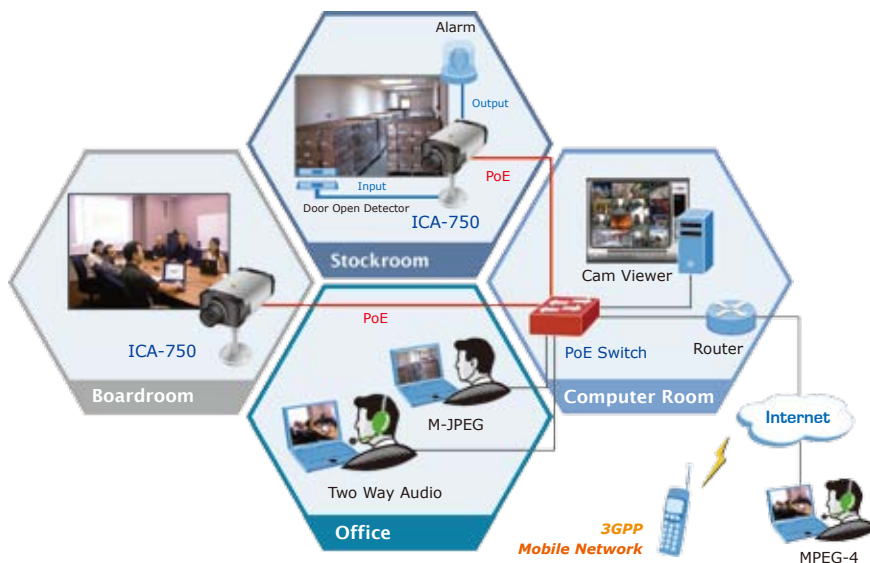

ORDERING INFORMATION

ICA-750	Dual Mode CCD Box Internet Camera
---------	-----------------------------------

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>