


PowerDsine® 7001G Family

High Power, Gigabit Single Port PoE Midspan

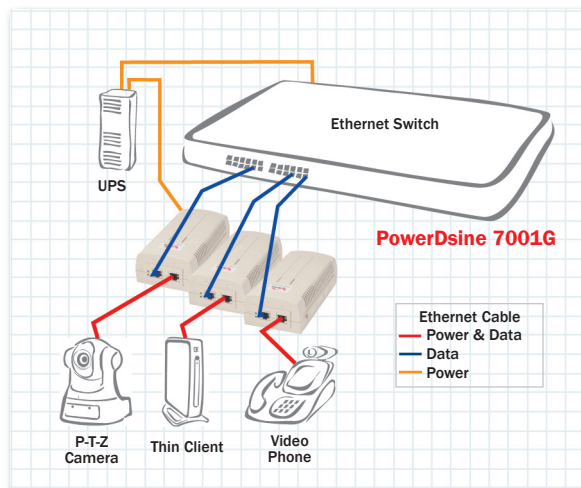

Overview

The PowerDsine 7001G is a single port, high-power solution for remote powering of current and emerging high power applications.

Generating a maximum of 30W, the 7001G enables remote power for a new range of applications including pan-tilt-zoom (PTZ) cameras, video-phones and thin-clients. It complies to IEEE 802.3af PoE standard parameters, while doubling the power available from prior midspans. It can power both existing 10/100Base-T network devices and such emerging wireless gigabit devices as Wi-MAX and remote distance wireless IEEE 802.11n access points.

PD7001G Features

- Up to 30W of Power on 2-pairs
- IEEE 802.3af Compliant-With Double the Power
- Compatible With All IEEE 802.3af or Legacy Cisco-Powered Devices
- Safe: Low Power Devices Receive Only the Power They Need
- Safe and Reliable Power to WLAN Access Points
- Automatic Detection and Protection of Non-standard Ethernet Terminals
- Supports 10/100/1000BaseT applications
- Compact Design Fits Easily in WLAN Access Point Installations

7001G Specifications

No. of Ports	1
Pass Through Data Rates	10/100/1000 Mbps
Power over Ethernet Output	Pin Assignment and Polarity: 4/5 (+), 7/8 (-) Output Power Voltage: 55Vdc User Port Power: 30Watts Max.
Input Power Requirements	AC Input Voltage: 100 to 240 Vac AC Input Current: 0.8A @ 100-240 Vac AC Frequency: 50 to 60 Hz
Dimensions	87.9 mm x 51.3 mm x 166 mm 3.46 in. x 2.0 in. x 6.53 in
Weight	.771 lbs (350g)
Indicators	System Indicator: AC Power (Green) User Indicator: Channel Power (Green)
Connectors	Shielded RJ-45, EIA 568A and 568B
Environmental Conditions	Operating Ambient Temperature: 32° to 104°F (0 to 40°C) Operating Humidity: Maximum 90%, Non-condensing Storage Temperature: -4° to 158°F (-20° to 70°C) Storage Humidity: Maximum 95%, Non-condensing Operating Altitude: -1000 to 10,000 ft. (-304.8 to 3048 m)
Reliability	MTBF: 100,000 hrs. @25°C
Thermal Rating	300 BTU/Hr (@240VAC)
Warranty	1-year
Regulatory Compliance	IEEE 802.3af (PoE), RoHS Compliant WEEE Compliant, CE
Electromagnetic Emission & Immunity	FCC Part 15, Class B with FTP cabling EN 55022 Class B (Emissions) EN 55024 (Immunity), VCCI
Safety Approvals	UL/cUL Per EN 60950 GS Mark Per EN 60950

Ordering Information



Part Number	Name	Description
PD-7001G/AC	PowerDsine 7001G	High Power 1-port Gigabit PoE, AC input

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>