

# ACE 1250

## Key Features

- **Advanced Compositelite™ Carbon Fiber Enclosure**—reduces passive enclosure losses (resulting in greater sonic accuracy), offers reduced weight, and is highly weather resistant.
- **12-inch, 2-Way System**—in a lightweight, multi-purpose enclosure; fully equipped with certified rigging hardware for improved safety margins plus reduced shipping and handling costs.
- **Spherical Waveguide**—mated with 1.5" exit neodymium compression driver, delivers true constant-directivity performance, 75° nominal coverage pattern, and reduced throat distortion.
- **Versatile Shape**—works as a floor wedge, side fill, or in small front-of-house clusters.
- **High Power Handling**—a 4-inch LF voice coil and 4-inch HF voice coil handle 600W continuous AES power. With 96 dB efficiency, peak SPL can reach 130 dB.
- **QSC DSP Downloads**—for QSC-powered systems using the DSP-3 programmable processor, a growing selection of custom tailored downloads offer virtually perfect "dialed-in" performance right out of the box.

The QSC-ACE 1250 Composite Loudspeaker is a full range speaker system that delivers exceptional sound quality and high SPL in a lightweight, all-weather carbon fiber enclosure. It makes an excellent choice for front of house arrays, delay or downfill clusters, high-level dance systems, and low profile stage monitoring systems.

The two-way, ported enclosure comprises a 1.5" exit neodymium compression driver coupled with a high frequency spherical waveguide that has true constant directivity performance. This spherical waveguide minimizes throat loading and distortion issues commonly associated with conventional high frequency horns. A powerful 12" LF transducer handles 600 watts of continuous power and provides smooth response through the crossover point. With a 75° nominal coverage pattern, multiple units can be played together to meet expanded coverage and SPL requirements.

The QSC-ACE 1250 WR employs a passive crossover that can be bypassed for bi-amplified use. The QSC-ACE 1250 AWR is designed for bi-amplification only and requires an external crossover.

QSC-ACE enclosures incorporate Compositelite™, a patented core composite technology that yields superior acoustic properties, lighter weight, and outstanding weather resistance compared to conventional enclosure materials. Multiple skins of carbon fiber are layered over a phenolic honeycomb core to form a rigid, seamless enclosure. The extreme stiffness of composite construction prevents flexing of the enclosure walls, significantly reducing transmission loss due to wall vibration. The result is reduced cabinet resonance, increased low-frequency output, and greater sonic accuracy. Furthermore, the enclosure's light weight translates to safer rigging and reduced handling costs. Installation accessories and array kits are readily available.




Hear the Power of Technology.




Specifications	1250 WR	1250 AWR
<b>Configuration</b>	Two way, ported enclosure	Two way, ported enclosure
<b>High Frequency Transducer</b>	1.5" exit Neodymium compression driver on conical waveguide	1.5" exit Neodymium compression driver on conical waveguide
<b>Low Frequency Transducer</b>	12" (309 mm)	12" (309 mm)
<b>Crossover Configuration</b>	Passive or Bi-amplified (switchable)	Bi-amplified
<b>Crossover Frequency</b>	1100 Hz	1100 Hz
<b>Frequency Response (Hz)</b> ±3 dB -10 dB	60 Hz–18 kHz 40 Hz–22 kHz	60 Hz–18 kHz 40 Hz–22 kHz
<b>Sensitivity (2.83V @ 1 meter)</b> <b>Full Range (20 Hz–20 kHz)</b> <b>Biamped LF</b> <b>Biamped HF</b>	96 dB – –	– 96 dB 112 dB
<b>Nominal Impedance</b> <b>Full Range</b> <b>Biamped LF</b> <b>Biamped HF</b>	8 ohms – –	– 8 ohms 8 ohms
<b>Power Handling (EIA RS-426A)</b> <b>Full Range</b> <b>Biamped LF</b> <b>Biamped HF</b>	600W 600W 75W	– 600W 75W
<b>Calculated Maximum Output (dB SPL @ 1m)</b>	130 dB	130/137 dB
<b>Nominal Coverage (-6 dB)</b>	75°	75°
<b>Enclosure</b>		
<b>Cabinet Shape</b>	Irregular Pentagon	Irregular Pentagon
<b>Enclosure Materials</b>	Compositelite™ Composite Core with Carbon Fiber	Compositelite™ Composite Core with Carbon Fiber
<b>Finish</b>	Epoxy Resin	Epoxy Resin
<b>Weather Resistance</b>	Yes	Yes
<b>Grill</b>	Wood frame w/grill cloth	Wood frame w/grill cloth
<b>Connectors</b>	4 x Neutrik NL4 Speakons	4 x Neutrik NL4 Speakons
<b>Suspension Hardware</b>	1200 Series Accessories, Aeroquip, or Forged Closed Loop Eyebolts	1200 Series Accessories, Aeroquip, or Forged Closed Loop Eyebolts
<b>Dimensions and Weight</b>		
<b>Height</b>	29.5" (74.9 cm)	29.5" (74.9 cm)
<b>Width (Front)</b>	19.5" (49.5 cm)	19.5" (49.5 cm)
<b>Depth</b>	12.6" (32.0 cm)	12.6" (32.0 cm)
<b>Trapezoid Angle</b>	45 deg. Prism	45 deg. Prism
<b>Net Weight</b>	49 lb. (22.2 kg)	47 lb. (21.3 kg)
<b>Shipping Weight</b>	61 lb. (27.5 kg)	59 lb. (26.6 kg)


**Frequency Response and Impedance (Passive Mode)**

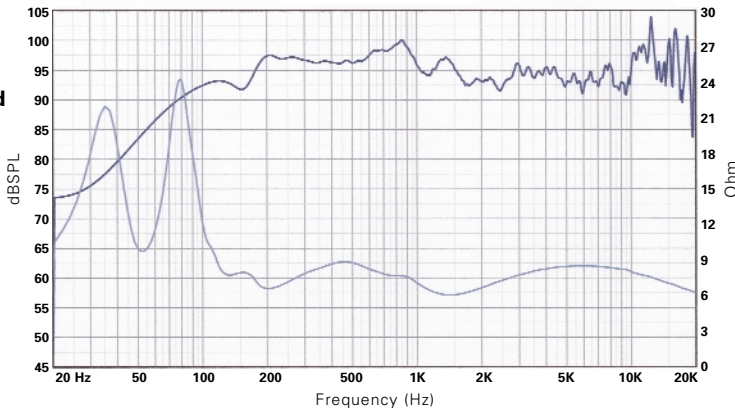


**Horizontal Frequency Response (0°, 30°, 60°)**

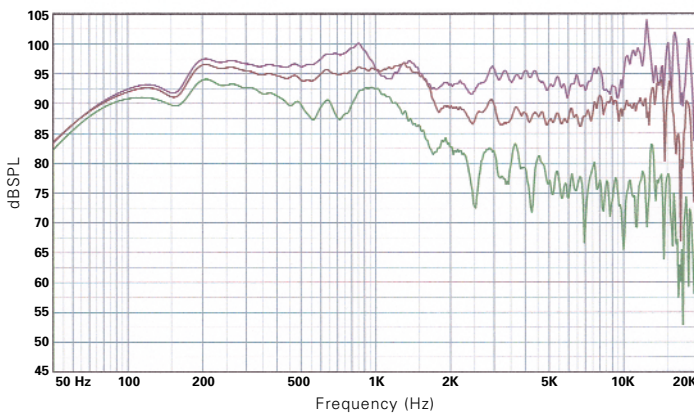

**Beamwidth vs Frequency**



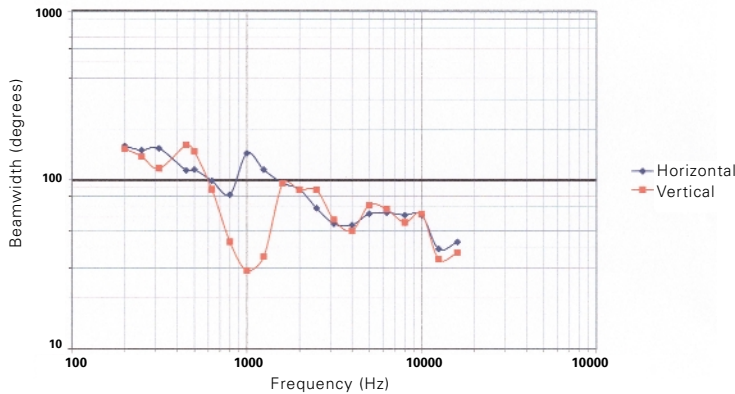


**Directivity Index and Q**

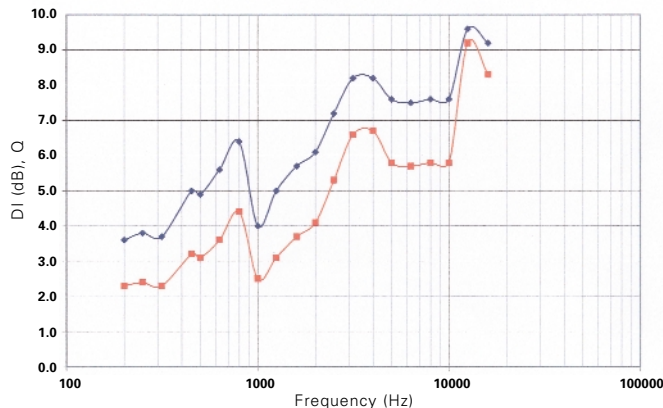

### Physical Dimensions

All units in inches

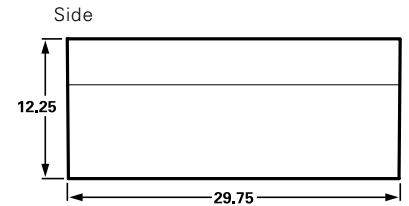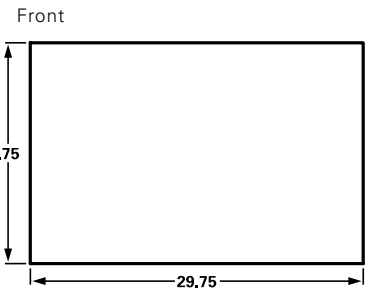

For more information about QSC professional loudspeakers, contact your local QSC sales representative, or call us toll-free at: **(800) 854-4079**



**Hear the Power of Technology.**

**QSC Audio Products, Inc.**

1675 MacArthur Boulevard  
 Costa Mesa, CA 92626  
 Toll-free: (800) 854-4079  
 Tel: (714) 957-7100  
 Fax: (714) 754-6174  
[www.qscaudio.com](http://www.qscaudio.com)

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>