


# ENFORCER®

## SA-025 Timer Module

The SA-025 Programmable Timer Module is suitable for a wide range of timed security and access control operations, such as door unlock timing, siren or bell timer, and so on. Auto-sensing of input voltage and DIP switches for programming make installation easy.

- Timer can be set from 1 sec. to 60 minutes
- Can be triggered by positive voltage (+DC), or closure or opening of dry contact.
- Relay can be programmed to activate at the start or at the end of the timing cycle
- Relay can also be set to activate for one second at the end of the timing cycle
- Programmable for pulse (flash) activation
- Built-in reset function to manually reset timing cycle
- Form-C relay, contacts rated 8A @ 120VAC/24VDC
- LED indicates relay is energized
- 12VDC/24VDC operation (auto sensing)
- Current draw - 3mA (standby) or 40mA (relay energized)
- Board measures 2 7/8" x 2 1/2" (73 x 63 mm)
- Functions programmed via DIP switches - no jumpers to cut

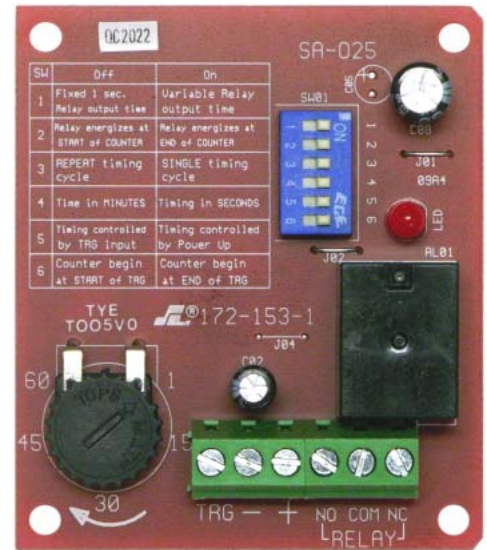

| DIP switch settings                       |                               |                           |  |
|---|-------------------------------|---------------------------|--|
| SwitchFunction                            | ON                            | OFF                       |  |
| #1 Timing starts:                         | At end of trigger             | At start of trigger       |  |
| #2 How does the timing start?             | When the module is powered up | Connecting (+) to TRG     |  |
| #3 Timer setting:                         | In seconds                    | In minutes                |  |
| #4 Steady relay output, or pulse/flash?   | Steady relay output           | Pulse/flash output        |  |
| #5 When does the relay output start?      | At end of timing period       | At start of timing period |  |
| #6 Relay output mode, delayed or instant? | Instant output                | Delayed output            |  |

## Other Products Available from SECO-LARM

### Power Supply/Chargers



ST-1206-1.5A



ST-2406-2A



ST-2406-3A



ST-2406-5A

| Model #      | Voltage DC | Current (continuous) | Current (peak) |
|--------------|------------|----------------------|----------------|
| ST-1206-1.5A | 6,12       | 1.5A                 | 2.0A           |
| ST-2406-2A   | 6,12,24    | 1.5A                 | 2.0A           |
| ST-2406-3A   | 6,12,24    | 2.5A                 | 3.0A           |
| ST-2406-5A   | 6,12,24    | 4.0A                 | 5.0A           |

## Relay Board

### SR-2224-C5

- 5-Amp relay, DPDT, Form-C.
- 6/12/24 VDC operation.
- LED indicates power.
- Relay can be wired for load switching, dry contact, latching, reverse polarity, line seizure, etc.



Plus many, many other products for commercial, residential and vehicle security. See our website for details, or contact us for a catalog.

The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is not responsible for misprints.

For more information, contact: Tel: 1-800-662-0800 (domestic U.S. & Canada)

Tel: 1-949-261-2999 (California & international) Fax: 1-949-261-7326 Email: info@seco-larm.com Website: www.seco-larm.com

TimerPdf070103.pmd

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>