

# ENFORCER<sup>®</sup>

## Relay Module


### SR-2224-C5

#### Features:


- Two separate sets of Form-C dry contacts.
- Perfect for a variety of general switching purposes.
- Can be connected for load switching, dry contact, latching output, reverse polarity, line seizure, and other uses.
- 6/12/24 VDC operation, programmable by on-board jumpers.
- Red LED indicates relay is energized.
- Large terminal blocks for easy installation.
- Small size, easily fits inside alarm panel enclosures or other hidden areas.
- Foam mounting tape included.

#### Specifications:

Model Number:	<b>SR-2224-C5</b>
Relay type:	DPDT, Form-C dry contacts
Relay contact ratings:	5A @ 250VAC/30VDC
Supply Voltage:	Programmable 6/12/24VDC, default at 12VDC
Current draw:	70mA @ 12-24VDC 100mA @ 6VDC
Minimum pull voltage	+/- 20% of operating voltage
Size	2.76" x 1.89" x .79" (70 x 48 x 20mm)
Weight	1.94 oz. (55 g)
Mounting method:	Foam tape (included)

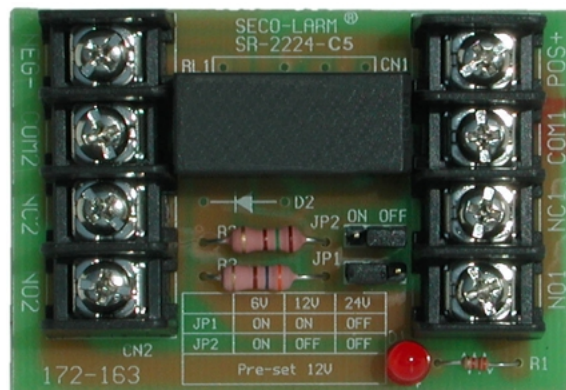

#### Connection Diagram

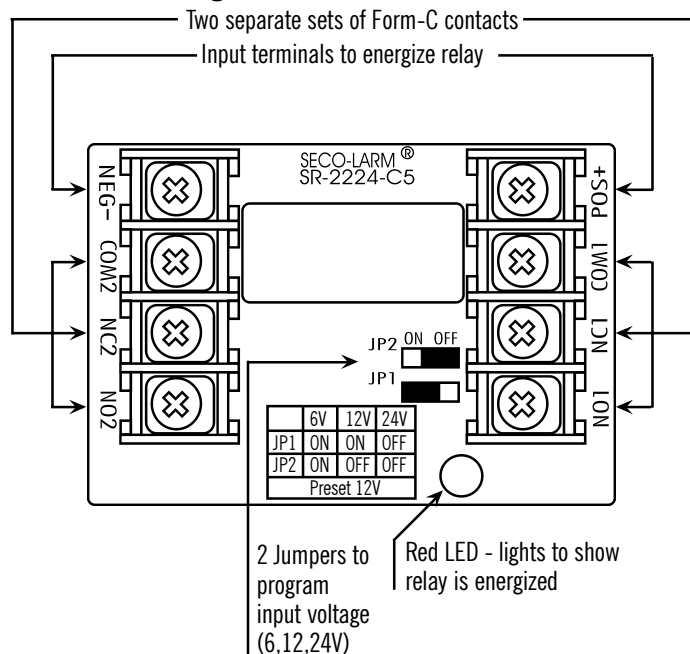

## ENFORCER<sup>®</sup>

### Power Supplies

#### Four Models to Choose From

- Switch selectable (see chart below) DC voltage output.
- Regulated and filtered output voltage.
- Switches to backup battery automatically in case of power loss.
- Short circuit protection.
- Built-in backup battery charger.



Model #	Voltage (DC)	Current	Current (peak)
ST-1206-1.5A	6,12	1.5A	2.0A
ST-2406-2A	6,12,24	1.5A	2.0A
ST-2406-3A	6,12,24	2.5A	3.0A
ST-2406-5A	6,12,24	4.0A	5.0A

## ENFORCER<sup>®</sup>

### Timer Modules

#### SA-025

- Triggered by positive voltage (+DC), closure of dry contact, or opening of dry contact.
- Set from 1 sec. to 60 min.
- Relay programmable to activate at start or end of timing cycle.
- Relay programmable for pulse (flash) activation.
- Built-in reset function.
- Form-C relay, contacts rated 8A @ 120VAC/24VDC.
- LED indicator.
- 12/24VDC (auto sensing).
- Low current drain.
- 2 7/8" x 2 1/2" (73 x 63 mm).



Power input	12/24VDC (auto sensing).
Current drain	Low
Relay type	Form-C relay
Contact ratings	8A @ 120VAC/24VDC.

**SECO-LARM<sup>®</sup> U.S.A., Inc.**  
16842 Millikan Avenue, Irvine, CA 92606

Tel: 1-800-662-0800 (Domestic U.S. & Canada) Tel: 1-949-261-2999 (California & international)  
Fax: 1-949-261-7326 Email: info@seco-larm.com Website: www.seco-larm.com

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>