


Type of Appliance	Temperature controlled, continuous flow, gas hot water system
Rinnai model number	REU-V2520FFUC-US
Operation	With or without remote controls, mounted in kitchen, bathroom, etc.
Exhaust system	Direct vent, forced combustion
Minimum/Maximum Gas Rate (Input)	15,000 - 180,000 BTU/h (Natural Gas or Propane)
Electrical	Appliance: AC 120 Volts - 60 Hz Remote Control: DC 12 Volts
Electrical Consumption	Normal 75 watts Standby 5.5 watts Anti-frost protection 100 watts
Ignition System	Direct electronic ignition
Hot Water Capacity	0.6 to 5.3 GPM (50° F rise) 0.6 to 5.3 GPM (35° F rise)
Temperature	120° - 185° F
Temperature (without remote)	140° F (factory default)
Approved Gas Types	Natural or Propane (ensure unit matches gas type)
Installation	Indoor only
Energy Factor	Natural Gas: 0.81 Propane: 0.81
Thermal Efficiency	Natural Gas: 84% Propane: 84%
Service Connections	Gas supply: 3/4 inch MNPT Cold water inlet: 3/4 inch MNPT Hot water outlet: 3/4 inch MNPT
Water Flow Control	Water flow sensor, electronic water control device, no bypass
Minimum/Maximum Water Supply Pressure	20 - 150 PSI (50 PSI or above is recommended for maximum flow)

FLOW TABLE

Water Flow Capacity Curves
(For 1 to 5 units manifolded in parallel)

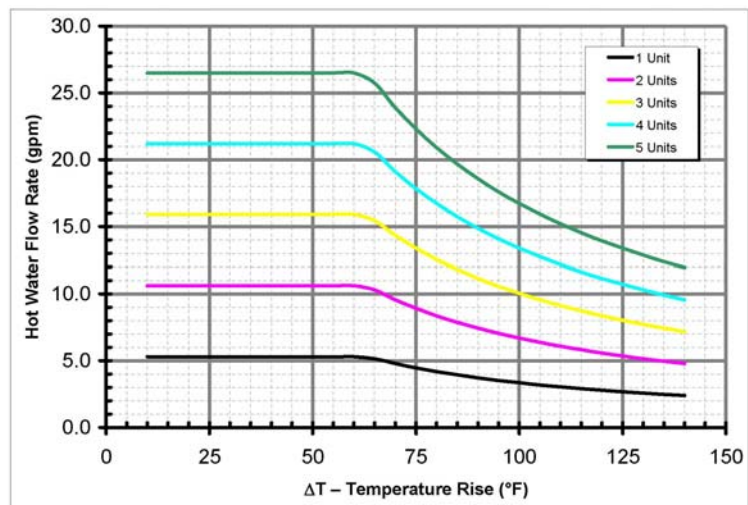

2520FFUC SP-1

Water Temperature Control

Remote Controls

Remote Control Cable

Safety Devices

Clearances from combustibles (suitable for closet, attic, and crawl space installations)

Clearances from non-combustibles

Min. / Max. Gas Supply Pressure

Manifold Gas Pressure (inches W.C.)

NOx

Warranty

Simulation feed forward and feedback

MC-91-1US (included)

Deluxe controller: MC-100V-1US (optional)

Bathroom controller: BC-100V-1US (optional)

Wireless controller (with transceiver): MC-502RC-1US-MS (optional)

Non-polarized two-core cable

- Flame failure - Flame Rod
- Boiling protection
- Combustion fan rpm check
- Over current - glass fuse (3 amp)
- Remaining flame (OHS)
- Thermal fuse
- Automatic frost protection

- Top of heater - 6 inches
- Front of heater - 6 inches
- Sides of heater - 2 inches
- Back of heater - 0 inches
- Bottom of heater - 12 inches
- From vent pipe - 0 inches

- Top of heater - 2 inches
- Front of heater - 6 inches
- Sides of heater - 1/2 inches
- Back of heater - 0 inches
- Bottom of heater - 12 inches
- From vent pipe - 0 inches

Natural Gas: min 6" W.C. max 10.5" W.C.

Propane Gas: min 10" W.C. max 13.5" W.C.

Natural Gas: high fire 3.7" W.C. low fire 0.77" W.C.


Propane Gas: high fire 4.2" W.C. low fire 0.93" W.C.

Meets California and Texas NOx Emission Rules

Commercial only; heat exchanger 5 years*; all other parts 5 years*; labor 1 year; (* 3 years if used as a circulating water heater within a circulation loop, when the water heater is in series with a circulation system and all circulating water flows through the water heater)

Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.

DIMENSIONS

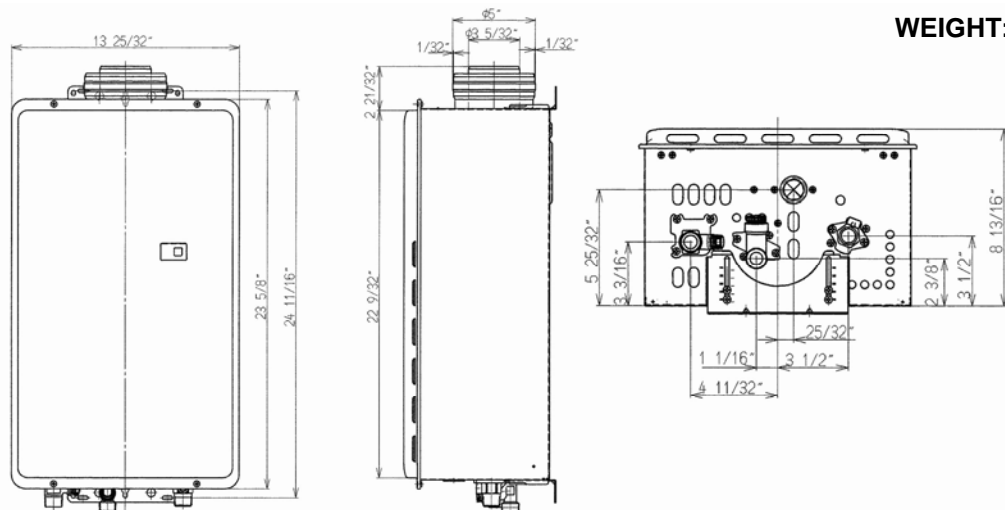

WEIGHT: 49 LBS

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>