

**HD
ready**



42LM5WP | 32LM5WP



- Fully-approved IP66 weatherproof, protected against powerful water jets and dust ingress
- Screen dimensions: 80 cm (32 inch, 32LM5WP) or 105 cm (42 inch, 42LM5WP)
- Winter mode: -20 °C to +45 °C operation
- Robust screen surface with anti-reflective tempered glass
- Anti-corrosive anodized aluminium cabinet
- Ideally suited for various indoor and outdoor installations as well as 24/7 applications
- Extensive input & output terminals
- Impressive picture quality: HD Ready



42LM5WP | 32LM5WP

Model	42LM5WP	32LM5WP
EAN Code	4994334246776	4994334246783
Category	Professional LCD monitor	
Type	Liquid crystal display panel	
IP rating	IP66*	
Screen size (diagonal image)	42" (105 cm)	32" (80 cm)
Active screen area (W x H)	93.0 x 52.3 cm	69.8 x 39.2 cm
Aspect ratio	16 : 9	
Resolution in pixels	1,366 x 768 (WXGA)	
Pixel pitch	0.227 x 0.681 mm	0.170 x 0.511 mm
Brightness	500 cd/m ²	
Contrast ratio	1,500 : 1	
Viewing angle	178° (horizontal and vertical)	176° (horizontal and vertical)
Response time	6 ms (gray to gray)	6.5 ms (gray to gray)
Grey scale value	8 bit	
Number of colours	16.7 M	
Colour Systems	PAL, NTSC3.58 (AV in), SECAM	
Computer compatibility	UXGA/WXGA/SXGA/XGA/SVGA/VGA	
Input terminals	DVI-D (digital/HDCP) D-Sub15 5 x BNC (RGBHV, Y-Pb/Cb-Pr/Cr) Component (Y, Pb, Pr) BNC (Video) Scart (RGB), Video RS232 (D-Sub 9 pin) 2 x RCA (R/L mono) for Audio 3.5 mm Stereo Jack for Audio	
Output terminals	5 x BNC (RGBHV, Y-Pb/Cb-Pr/Cr) Component (Y, Pb, Pr) BNC (Video) RS232 (D-Sub 9 pin) 2 x RCA (R/L mono) for Audio External speaker output (2 x 6 W)	
Operating temperature	-20 °C to +45 °C (winter mode)	
Storage Temperature	-20 °C to +60 °C	
Maximum resilience	100 N/mm ²	
Voltage	100-240 V (50/60 Hz)	
Power consumption	200W / 2W (stand-by mode)	135W / 1W (stand-by mode)
Dimensions (W x H x D)	1,027 x 620 x 167.5 mm	803 x 493 x 162 mm
Weight	35.5 kg	21.8 kg
Vesa mounting sizes	200 x 200 mm	
Colour of cabinet	Silver	
Warranty	2 years	
Standard accessories	User manual, remote control, batteries, power cable	
Optional accessories	Anti-corrosive wall mount (LCD 200)	Anti-corrosive wall mount (LCD 200)
Special features	Anodized aluminium case, weatherproof, reinforced, anti-reflective tempered glass screen surface, 24h/7 approved, portrait mode, extensive input & output terminals	

* IP = Protection class



Technical specifications subject to change without notice. Date 04/2008

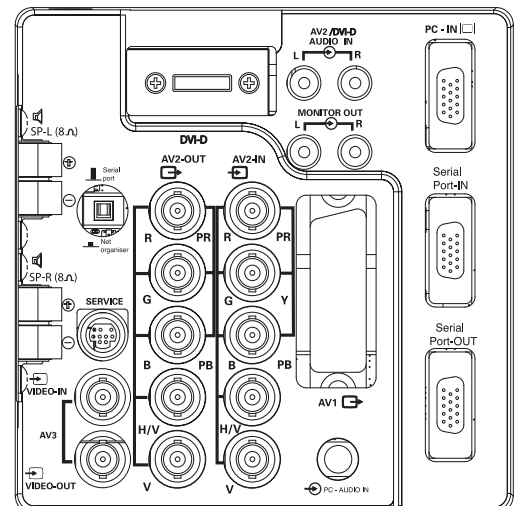

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>