






Bedienungsanleitung
Instructions for use
Notice d'emploi
Istruzioni per l'uso
Instrucciones para el uso
Gebruiksaanwijzing



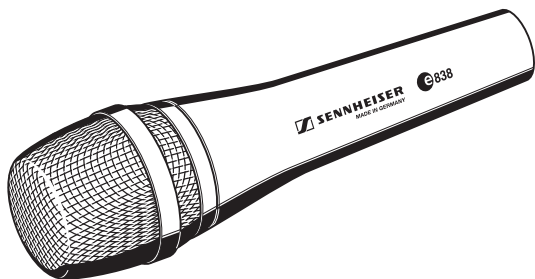

838

The  838 has been engineered for the vocalist that needs the vocals to cut through the band. Due to its excellent acoustic properties, the  838 delivers a high signal output to cut through high on-stage sound levels with ease. A gentle presence boost to even tonal response ensures vocal clarity and projection.

The balanced frequency response maintains signal quality when moving on and off axis during performance. The minimal proximity effect provides for consistently clear bass-end performance when singing closer to, or further from the microphone.

The cardioid pick-up pattern provides excellent feedback rejection and good isolation from incidental rear noise. The rugged metal construction and internal damping isolates handling noise.


Features

- Rugged metal body
- Shock-mounted capsule
- Frequency-independent directivity
- Exceptional feedback rejection
- Excellent vocal projection
- Humbucking coil


Delivery includes

- e838 microphone
- MZQ 800 microphone clamp
- Pouch
- Instructions for use
- Warranty Certificate




Pin assignment of XLR-3 connector

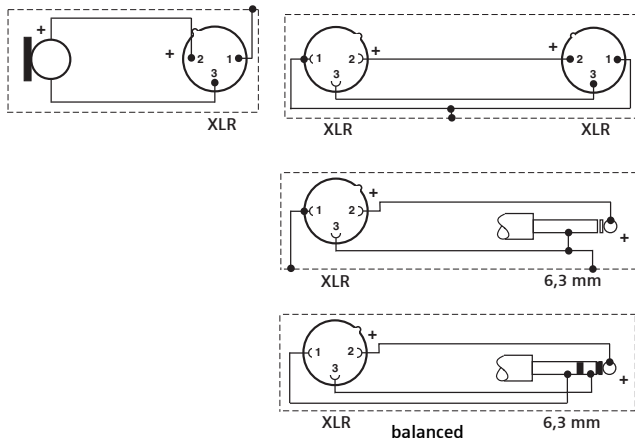

Removing the sound inlet basket

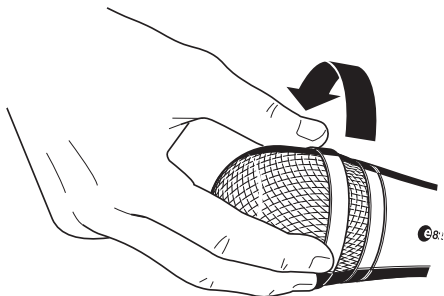


Positioning the microphone

Position	Resulting sound	Commentary
	High proximity effect (much bass/ fundamental) Powerful, direct sound	Very little crosstalk from other sound sources
	Less proximity effect (less bass/ fundamental) Some room ambience, natural, balanced sound	More crosstalk from other sound sources
	Very little proximity effect (little bass/ fundamental) More room ambience, indirect sound	Much crosstalk from other sound sources


If sibilance or “popping” occurs, position the microphone not directly in front of the mouth but slightly to the side. In order to prevent feedback, position monitor loudspeakers so that they are located in the angle area of the highest cancellation of the microphone.

In order to prevent interference due to crosstalk between adjacent sound sources, try to position the microphone so that the interfering sound source is located in the angle area of the highest cancellation of the microphone (approx. 150° ; see polar diagram).

Polar diagram

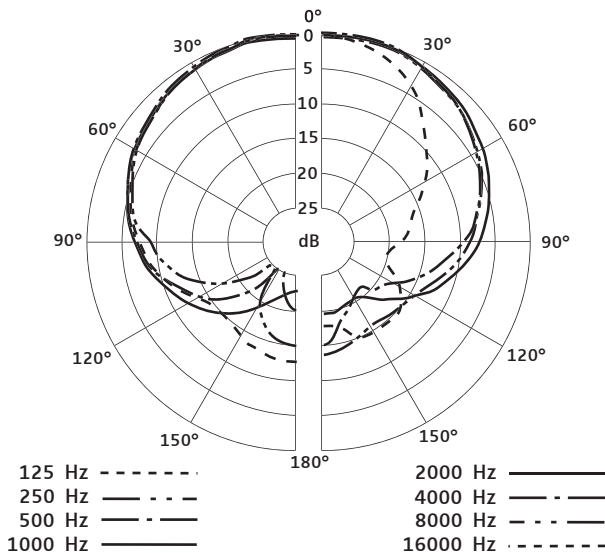

Frequency response curve

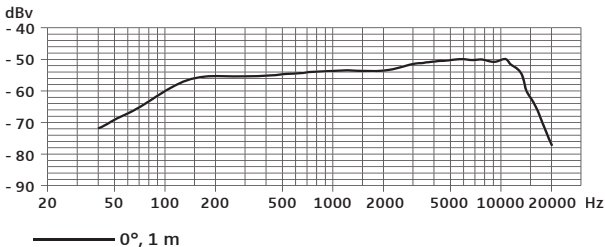

Specifications

Transducer principle	dynamic
Frequency response	40.....17,000 Hz
Pick-up pattern	cardioid
Sensitivity (free field, no load at 1 kHz)	2 mV/Pa \pm 3 dB
Nominal impedance	350 Ω
Min. terminating impedance	1 k Ω
Connector	XLR-3
Weight	330 g
Dimensions	\emptyset 47 x L 181 mm

Overview of microphone applications

Application	Variant											
	e602-II	e604	e606	e608	e614	e815	e825	e835	e838	e840	e845	e865
Vocals						x	x	x	x	x	x	x
Choirs					x							
Studio, acoustic instruments					x							
Orchester					x							
Brass/Saxophon	x	x		x								
Acoustic guitar					x							
Acoustic bass					x							
Guitar amplifiers			x									
Bass amplifiers	x											
Leslie	x	x	x									
Piano, grand piano					x							
Kick drums	x											
Snare drums		x	x	x								
Rack toms		x	x	x								
Floor toms	x	x	x									
Congas		x	x	x								
Cymbals					x							
Percussion		x	x	x	x							
Overheads					x							

Manufacturer declarations

Warranty

2 years

Approval




Sennheiser electronic GmbH & Co. KG declare that this device is in compliance with the applicable CE standards and regulations.

WEEE Declaration



Please dispose of this product at the end of its operational lifetime by bringing it to your local collection point or recycling centre for such equipment.





Sennheiser electronic GmbH & Co. KG

30900 Wedemark, Germany

Phone +49 (5130) 600 0

Fax +49 (5130) 600 300

www.sennheiser.com

Printed in Germany

Publ. 08/07

524419/A01

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>