

SONY

Monitor Family Pocket Guide



You make it a Sony

MULTIFORMAT VIDEO MONITORS**BVM-D Series**

- 32 & 24-inch Flat 16:9 HR Trinitron, EBU Phosphors, 1000 TV lines
- Multiple format SD & HD inputs
- Auto White Balance capabilities
- Selectable aspect ratio 16:9/4:3
- Separate control unit & memory card
- Digital uniformity
- Digital convergence (BVM-D32E1WE)
- Optional SD & HD plug-in decoder boards

- 24-inch Flat 16:9 HR Trinitron, EBU Phosphors, 1000 TV lines
- Multiple format HD inputs
- Flicker free progressive images
- 4:4:4 Dual link HD SDI signal processing
- SXGA computer input signal
- Auto White Balance capabilities
- Separate control unit & memory card
- Digital uniformity & Digital convergence

- 20-inch HR Trinitron, EBU Phosphors, 900 TV lines
- Multiple format SD & HD inputs
- Auto White Balance capabilities
- Selectable aspect ratio 16:9/4:3
- Separate control unit & memory card
- Multiple monitor control
- Optional SD & HD plug-in decoder boards

BVM-F Series

- 20-inch HR Trinitron, EBU phosphors, 900 TV lines
- Auto White Balance capabilities
- Selectable aspect ratio 16:9/4:3
- Separate control unit & memory card
- Multiple monitor control
- Optional plug-in decoder boards

PVM-L Series

- 20 & 14-inch HR Trinitron - PVM-20L4 /PVM-14L4: 800 TV lines, EBU phosphors
- 14-inch Trinitron - PVM-14L3: 600 TV lines
- Auto White Balance capabilities
- Selectable aspect ratio 16:9/4:3
- Versatile analogue video inputs
- Compact chassis
- Multiple monitor control
- Optional plug-in decoder boards
- Silver Support supplied as standard

Black & White Monitors

- 14-inch, 1000 TV lines
- Selectable aspect ratio 16:9/4:3 (PVM-146E)
- D65 colour temperature (PVM-146E)
- Convenient operating functions (PVM-146E)
- Rack mountable
- Silver Support supplied as standard

LMD Series

- 32-inch LCD
- WXGA LCD panel
- Separate LCD and video processor
- Selectable aspect ratio 16:9/4:3
- Versatile video and computer inputs
- Multifformat SD/HD video inputs
- Compact, slim and lightweight LCD panel
- Low power consumption
- Parallel remote function
- Silver Support supplied as standard

Professional LCD Video Monitors

- 23-inch LCD
- WXGA LCD panel
- Separate LCD and video processor
- Selectable aspect ratio 16:9/4:3
- Versatile video and computer inputs
- Multifformat SD/HD video inputs
- Compact, slim and lightweight LCD panel
- Low power consumption
- Parallel remote function
- Silver Support supplied as standard

Accessories

- 17-inch LCD
- WXGA LCD panel
- Separate LCD and video processor
- Selectable aspect ratio 16:9/4:3
- Versatile video and computer inputs
- Multifformat SD/HD video inputs
- Compact, slim and lightweight LCD panel
- Low power consumption
- Parallel remote function
- Rack mount capability
- Silver Support supplied as standard

BVM Accessories

- Optional Plug-in Decoder Boards
- BKM-20D SDI input decoder - 3 x SDI inputs and 1 x analogue component
- BKM-21D SDI/PAL/NTSC input decoder - 3 x SDI inputs and 3 x analogue composite
- BKM-22X SDI and analogue input expansion board
- BKM-24N Precision NTSC input decoder
- BKM-25P Precision PAL input decoder
- BKM-26M Precision PAL-M input decoder
- BKM-27T PAL/NTSC/SECAM input decoder
- BKM-28X Analogue input expansion board
- BKM-41HD HD SDI input adaptor - 1 x digital input for BVM-D20/24/32 models
- BKM-42HD HD SDI input adaptor - 2 x digital inputs for BVM-D20/24/32 models
- BKM-48X HD/SD Analogue input expansion board with floating inputs
- BKM-120D SDI input adaptor - 2 x SDI inputs for BVM-D9/14 models
- BKM-127W NTSC/PAL input adaptor for BVM-D9/14 models
- BKM-129X Analogue component/GBR input board for BVM-D9/14 models
- BKM-142HD HD SDI input adaptor - 2 x digital inputs for BVM-D9/14 models

PVM Accessories

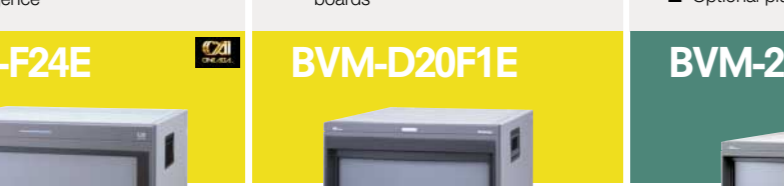
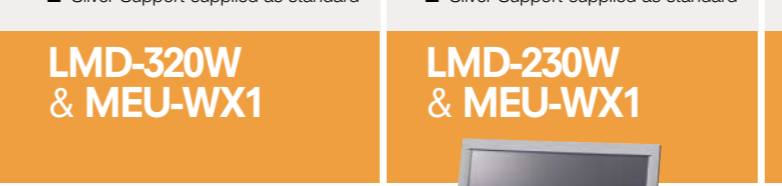
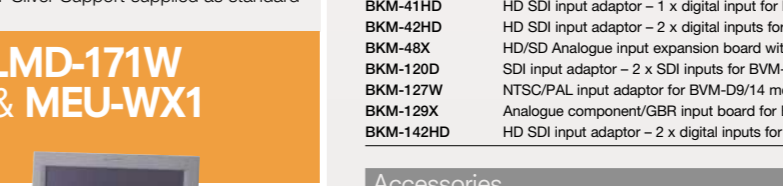
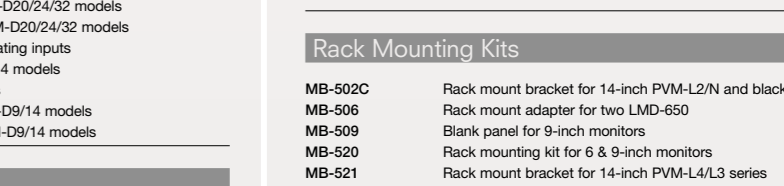

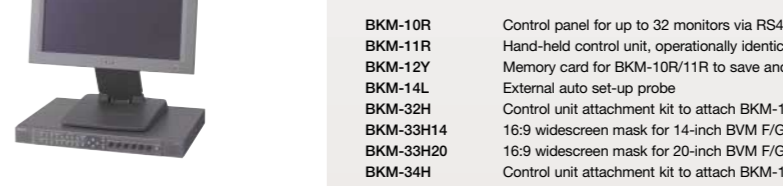
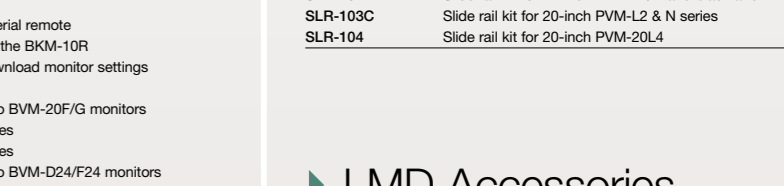

- Optional plug-in decoder boards
- BKM-120D SDI video plug-in decoder board for PVM-L series
- BKM-129X Analogue component/GBR input board for PVM-L series
- BKM-150CP SDTI-CP/SDI video/audio plug-in decoder board for PVM-L series

Accessories

- Accessories
- BKM-140M 16:9 mask for 14-inch PVM-L4/L3 series
- BKM-200M 16:9 mask for PVM-20L4

Rack Mounting Kits

- MB-502C Rack mount bracket for 14-inch PVM-L2/N and black and white monitors
- MB-506 Rack mount adapter for two LMD-650
- MB-509 Blank panel for 9-inch monitors
- MB-520 Rack mounting kit for 6 & 9-inch monitors
- MB-521 Rack mount bracket for 14-inch PVM-L4/L3 series
- SLR-102 Slide rail kit for 14-inch PVM-L2/N and black and white monitors
- SLR-103C Slide rail kit for 20-inch PVM-L2 & N series
- SLR-104 Slide rail kit for 20-inch PVM-20L4

**BVM-D32E1WE
BVM-D24E1WE****BVM-F24E****BVM-D20F1E****BVM-20F1E****BVM-14F1E****PVM-20L4
PVM-14L4
PVM-14L3****PVM-20L2
PVM-14L2****PVM-145E
PVM-146E****LMD-320W
& MEU-WX1****BVM-D14H1E
BVM-D14H5E****BVM-D9H1E
BVM-D9H5E****BVM-14F5E****PVM-20L1
PVM-14L1****PVM-9L3
PVM-9L2****PVM-9L1****PVM-95E
PVM-96E****LMD-210
& MEU-WX1****LMD-440
LMD-5320
LMD-720W
LMD-650**

- 14-inch HR Trinitron, EBU Phosphors, 800 TV lines
- Multiple format SD & HD inputs
- Auto White Balance capabilities
- Selectable aspect ratio 16:9/4:3
- Separate control unit for BVM-D14H1E
- Multiple monitor control
- Optional SD & HD plug-in decoder boards

- 9-inch HR Trinitron, EBU Phosphors, 450 TV lines
- Multiple format SD & HD inputs
- Auto White Balance capabilities
- Selectable aspect ratio 16:9/4:3
- Separate control unit for BVM-D9H1E
- Multiple monitor control
- Optional SD & HD plug-in decoder boards

- 14-inch HR Trinitron, EBU phosphors, 800 TV lines
- Auto White Balance capabilities
- Selectable aspect ratio 16:9/4:3
- Integrated control unit & memory card
- Multiple monitor control
- Optional plug-in decoder boards

- 20 & 14-inch Trinitron, 600 TV lines
- Selectable aspect ratio 16:9/4:3
- Composite PAL/NTSC and Y/C video input
- Basic monitoring function
- Parallel remote function
- Silver Support supplied as standard

- 9-inch HR Trinitron - PVM-9L3: 450 TV lines
- 9-inch Trinitron - PVM-9L2: 250 TV lines
- Selectable aspect ratio 16:9/4:3
- Versatile analogue video inputs
- Li-Ion battery operation
- Rack mountable (two units)
- Silver Support supplied as standard

- 9-inch Trinitron, 250 TV lines
- Selectable aspect ratio 16:9/4:3
- PAL/NTSC and Y/C inputs
- Parallel remote function
- Rack mountable (two units)
- Silver Support supplied as standard

- 9-inch, 800 TV lines
- Selectable aspect ratio 16:9/4:3 (PVM-96E)
- D65 colour temperature (PVM-96E)
- Convenient operating functions (PVM-96E)
- Rack mountable
- Silver Support supplied as standard

- 21-inch LCD
- XGA LCD panel
- Separate LCD and video processor
- Selectable aspect ratio 16:9/4:3
- Versatile video and computer inputs
- Multifformat SD/HD video inputs
- Compact, slim and lightweight LCD panel
- Low power consumption
- Parallel remote function
- Rack mount capability
- Silver Support supplied as standard

- 15-inch LCD
- XGA LCD panel
- Separate LCD and video processor
- Selectable aspect ratio 16:9/4:3
- Versatile video and computer inputs
- Multifformat SD/HD video inputs
- Compact, slim and lightweight LCD panel
- Low power consumption
- Parallel remote function
- Rack mount capability
- Silver Support supplied as standard

- LMD-440: 4x4-inch LCD
- LMD-5320: 3x5.6-inch LCD
- LMD-720W: 2x7-inch LCD
- Selectable aspect ratio 16:9/4:3 (LMD-720W)
- PAL/NTSC input
- Optional SDI video decoder
- Parallel remote function
- Rack mount capability
- Silver Support supplied as standard

- 6.5-inch high resolution LCD
- VGA panel (640 x 480 pixels)
- High brightness & contrast
- Selectable aspect ratio 4:3/16:9
- Composite PAL & Y/C inputs
- Li-Ion battery operation
- Rack mountable (two units)
- Silver Support supplied as standard

- BKM-10R Control panel for up to 32 monitors via RS485 serial remote
- BKM-11R Hand-held control unit, operationally identical to the BKM-10R
- BKM-12Y Memory card for BKM-10R/11R to save and download monitor settings
- BKM-14L External auto set-up probe
- BKM-32H Control unit attachment kit to attach BKM-10R to BVM-20F/G monitors
- BKM-33H14 16:9 widescreen mask for 14-inch BVM F/G Series
- BKM-33H20 16:9 widescreen mask for 20-inch BVM F/G Series
- BKM-34H Control unit attachment kit to attach BKM-10R to BVM-D24/F24 monitors
- VF-508 Hood & rear protector for 9-inch BVM-D series

- BKM-30E14 19-inch EIA standard rack mount kit for 14-inch stand alone monitors
- BKM-31E14 19-inch EIA standard rack mount kit for 14-inch display monitors
- BKM-30E20 19-inch EIA standard rack mount kit for 20-inch display monitors
- MB-509 Blank panel for BVM-D9H5E
- MB-510 Rack mount kit for BKM-10R
- MB-519 Blank panel for BVM-D9H1E
- MB-520 Rack mount kit for 9-inch BVM-D series

- BKM-220D SDI video decoder - 2 x digital inputs
- BKM-255DV DV signal decoder - 2 x digital inputs
- BKM-243HS SD/HD SDI video decoder - 2 x digital inputs

- BKM-320D SDI video decoder for LMD-440/5320/720W
- SMF-600 Extension cable for LMD-150/210/171W/230W
- SU-558 Monitor stand for LMD-150/210/171W/230W
- SU-559 Floor stand for LMD-320W

- MB-522A Rack mount kit for LMD-171W
- MB-523 Rack mount kit for LMD-210
- MB-524 Rack mount kit for LMD-150

Silver Support

5 additional reasons to choose PVM Series and LMD Series



2 Years Support

The Silver Support Pack extends the support period from the standard 1-year warranty to two years. Not only that, but extra features and services are also included.



Operational Phone Call Centre

Operational phone support is provided to give advice and help so that the user can get the most out of their equipment and maximise its performance. Our telephone support is available from Monday to Friday and in 5 languages: English, French, German, Italian and Spanish.



Collection Anywhere

In the event of equipment failure, Sony will arrange collection of the faulty unit directly from, and delivery of the repaired unit directly to the customer's location - anywhere in mainland EU, Norway or Switzerland. That makes it simpler, quicker and even more convenient for the customer.



Repair within 7 days

Sony will collect, repair and return the unit to the customer's preferred location within 7 working days. So, minimum downtime, increased confidence and the ability to plan your business are guaranteed.



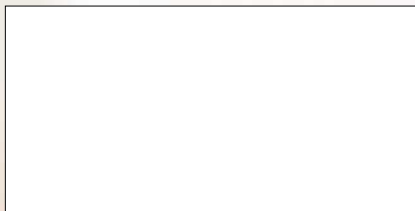
Loan

If the faulty equipment cannot be repaired in time, the hotline will contact the customer and arrange to have a loan unit delivered. Arrangements will be made to collect the loan unit as soon as confirmation is received that the repair has been carried out satisfactorily.

SONY

SONY EUROPE

www.sonybiz.net



© 2004 Sony Corporation. Sony is a registered trademark of the Sony Corporation, Japan. Sony Trinitron and HR Trinitron are trademarks of Sony Corporation. Features and specifications are subject to change without notice.
CA Monitor Pocket Guide/GB- / /2004



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>