

- DOE Compliant for Water and Energy Standards
- Multi-Cycle Timer Knob
- Self-Adjusting Leveling Legs
- Low Water Consumption

MULTI-HOUSING

Manual Control
Commercial
Top Load Washer
Rear Control

Speed Queen®



LWN412



LWN311

RELIABLE COMMERCIAL PRODUCTS

Curved Four-Vane
Polypropylene Agitator



Waterfall
Fill




- Durable Stainless Steel or Porcelain Enamel Washtub
- Automatic Balancing Suspension System
- Extract Speed of 710 RPM Spins Clothes Out Drier
- Automatic Temperature Control to Reduce Hot Water

MANUAL COMMERCIAL **TOP LOAD WASHER** SPECIFICATIONS

	LWN311PP111TW01	LWN311SP111TW01	LWN311WP111TW01	LWN412SP111TW01	LWS05
Activation	Manual	Manual	Manual	Manual	Manual
Appearance					
Color	White	White	White	White	White
Tuff Guard Top and Lid Finish	√	√	√	√	√
Control Panel Selection	Rear	Rear	Rear	Rear	Rear
Water and Energy Info					
Modified Energy Factor "MEF" ft ³ /kWh/cycle (Liters/kWh/cycle)	1.33 (37.67)	1.33 (37.67)	1.33 (37.67)	1.33 (37.67)	1.55 (43.9)
Water Factor "WF" gal/ft ³ (Liters/Liter/cycle)	9.4 (1.26)	9.4 (1.26)	9.4 (1.26)	9.4 (1.26)	8.6 (1.15)
Water Consumption - gal (Liter)	31.4 (118.9)	31.4 (118.9)	31.4 (118.9)	31.4 (118.9)	28.0 (106.0)
Average Hot Water - gal (Liter)	4.7 (17.8)	4.7 (17.8)	4.7 (17.8)	4.7 (17.8)	36.7 (8.9)
Technical Info					
Basket Volume - cu. ft. (liters) - 3.3 (95)	Blue Porcelain	Stainless	White Porcelain	Stainless	Stainless
Net Weight - lb (kg)	180 (82)	180 (82)	180 (82)	180 (82)	180 (82)
Shipping Weight - lb (kg)	195 (88)	195 (88)	195 (88)	195 (88)	195 (88)
Electrical Requirements - 120/60/1-15 amp					
Overall Dimensions WxDxH - in (mm): 25 5/8" (651) x 28" (711) x 43" (1092)					
Cabinet Height - in (mm)	36 (914)	36 (914)	36 (914)	36 (914)	36 (914)
Temperature - Hot, Warm, Cold					
Cycle - Regular, Perm Press, Delicate					
Motor	1/2 HP	1/2 HP	1/2 HP	1/2 HP	1/2 HP
Water Pressure psi (Bar) Pressure Fill 20 to 120 psi	1.4/8.3	1.4/8.3	1.4/8.3	1.4/8.3	1.4/8.3
Spin Speed - RPM 710	1 Speed	1 Speed	1 Speed	2 Speed	1 Speed
Drain	Pump	Pump	Pump	Pump	Pump
Performance/Features					
Fabric Softener and Bleach Dispenser					
Agency Approval	cULus	cULus	cULus	cULus	cULus

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

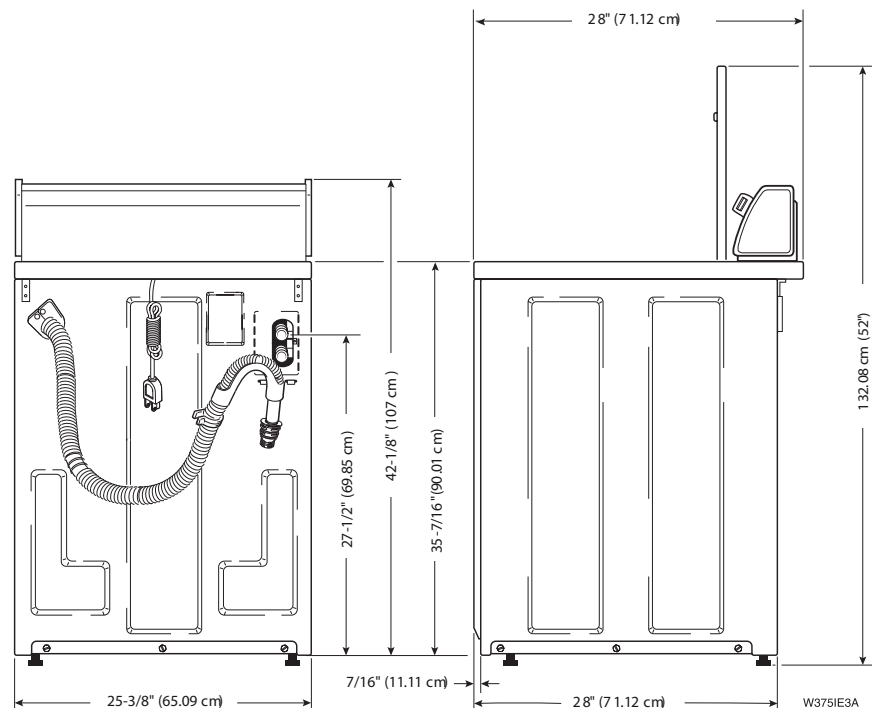

© 2013 Alliance Laundry Systems LLC AM11-0524R1
Speed Queen | 800-345-5649 | www.speedqueen.com/route

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>