


## FEATURES

- Can be installed in a standard or flush inset application.
- Dual convection upper oven with two fans for even heat distribution.
- Ten cooking modes in upper oven—bake, roast, broil, convection, convection bake, convection roast, convection broil and proof—bake stone and dehydration modes require accessory. Four modes in lower oven.
- Cobalt blue porcelain oven interiors.
- Large viewing, double-pane windows and dual halogen interior lights.
- Three adjustable oven racks; one full-extension easy glide, one full-extension door glide and one standard in each oven.
- Hidden bake elements and recessed broil elements.
- Temperature probe and broiler pan.
- Self-clean, delayed start, timed cook and Sabbath features.
- Balanced door hinge system for smooth opening and closing.

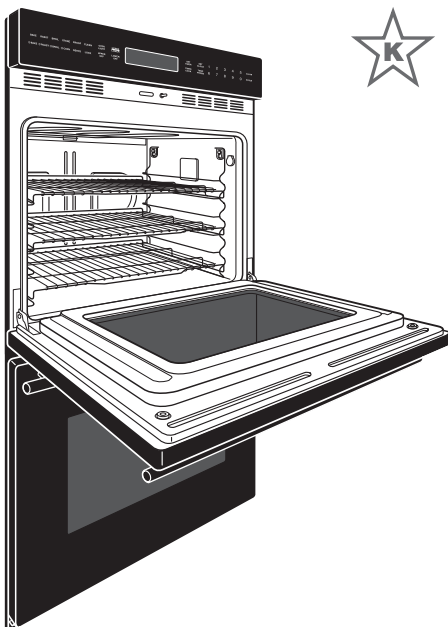

## MODEL OPTIONS

Contemporary	DO30CE/B/TH
--------------	-------------

## ACCESSORIES

- Bake stone kit—includes stone, rack and peel.
- Dehydration kit—includes racks and door stop.
- Set of three standard oven racks.
- Full-extension easy glide rack.
- 30" premiere baking pan.
- Temperature probe and broiler pan.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, [wolfappliance.com](http://wolfappliance.com).

## SPECIFICATIONS

### PRODUCT

Dimensions 29<sup>7</sup>/<sub>8</sub>"W x 50<sup>3</sup>/<sub>8</sub>"H x 23<sup>3</sup>/<sub>4</sub>"D  
 Weight 466 lb

### OVEN INTERIOR

Capacity (per oven) 4.5 cu ft  
 Interior 25"W x 16<sup>1</sup>/<sub>2</sub>"H x 19"D


### ELECTRICAL

Supply 240/208 VAC, 60 Hz  
 Service 50 amp circuit  
 Conduit 5 ft


Specifications are subject to change without notice. Visit [wolfappliance.com/specs](http://wolfappliance.com/specs) for the most up-to-date information.

Dimensions may vary ±1/8" (3). Dimensions in parentheses are millimeters unless otherwise specified.

## DIMENSIONS

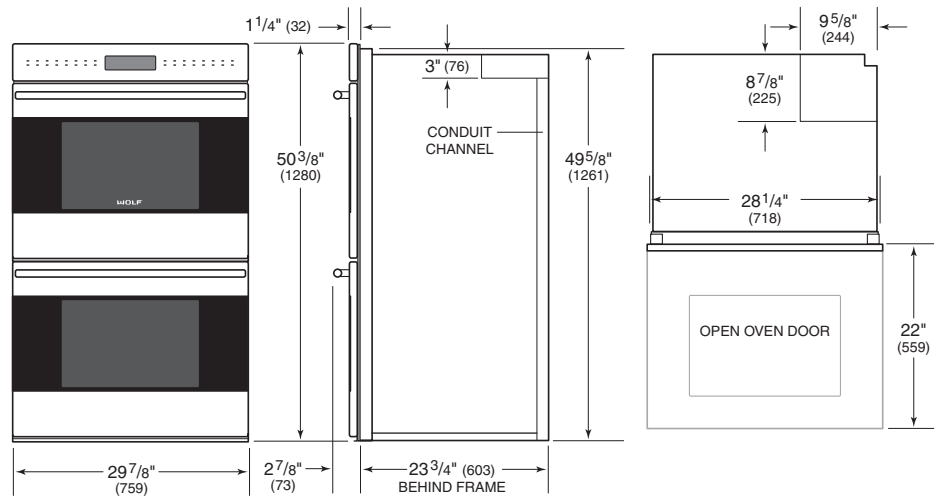


## STANDARD INSTALLATION

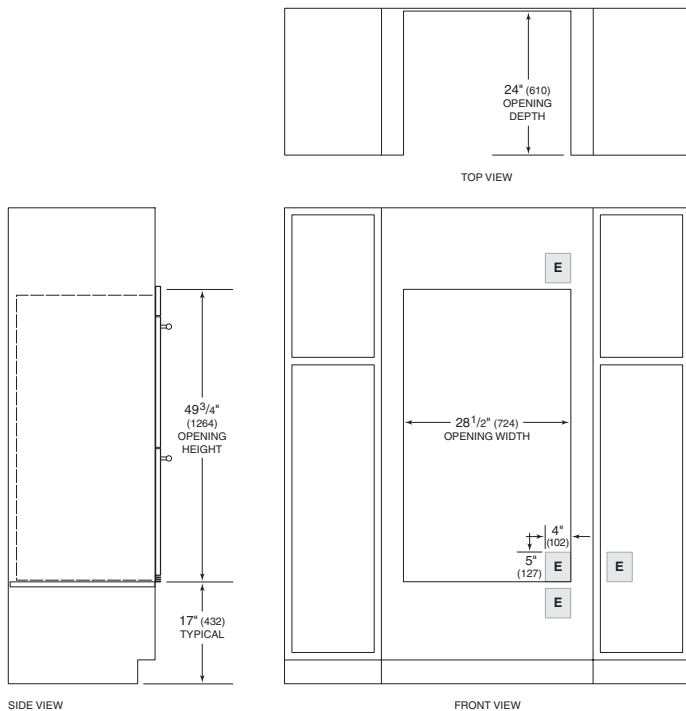

NOTE: Location of electrical supply within opening may require additional cabinet depth. Dashed line represents profile of unit.

## FLUSH INSET INSTALLATION

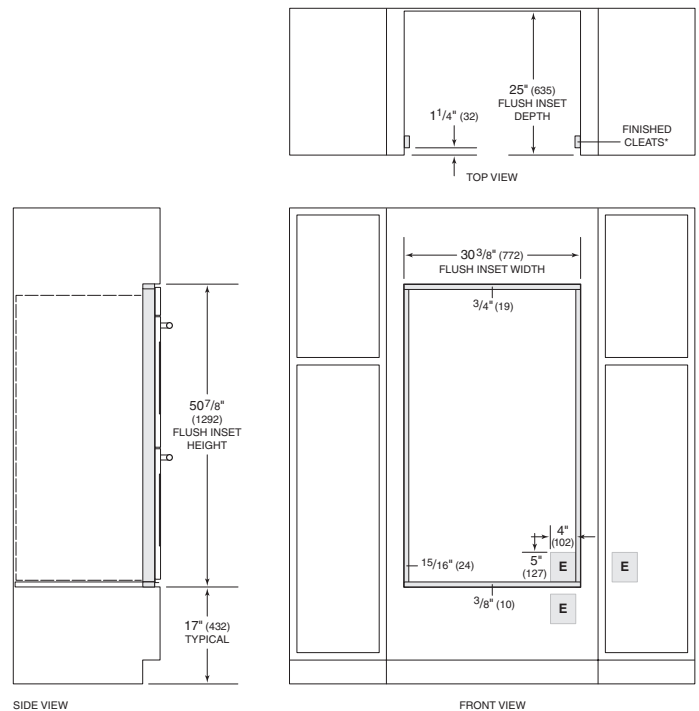

\*Will be visible and should be finished to match cabinetry.

NOTE: Location of electrical supply within opening may require additional cabinet depth. Dashed line represents profile of unit.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>