

TOSHIBA

INSTRUCTION MANUAL

EIM-4000086G A.1

CCD COLOR CAMERA

IK-6210A/IK-6410A

Please read this manual thoroughly before use, and keep it handy for future reference.

Record in space provided below the Model # and the Serial # as found on the label on the bottom of this unit.

Model # _____ Serial # _____

Retain this information for future reference.

TABLE OF CONTENTS

IMPORTANT SAFEGUARDS	2
1. FEATURES AND DESCRIPTION	4
2. COMPONENTS	4
3. PART NAMES AND FUNCTIONS	5
4. CAMERA INSTALLATION	6
5. CONNECTIONS AND OPERATIONS	7
6. LENS	9
7. LINE-LOCK PHASE	10
8. AUTOMATIC ELECTRONIC SHUTTER (AES)	11
9. BACKLIGHT COMPENSATION (BLC)	11
10. NOTES ON USE AND INSTALLATION	12
11. IN CASE OF PROBLEMS	12
12. SPECIFICATIONS	13
13. EXTERIOR VIEW	15

IMPORTANT SAFEGUARDS

1. Read Instructions

All the safety and operating instructions should be read before the product is operated.

2. Retain Instructions

The safety instructions and instruction manual should be retained for future reference.

3. Warnings

Comply with all warnings on the product and in the instruction manual.

4. Follow Instructions

Follow all operating and use instructions.

5. Cleaning

Disconnect this video product from the power supply before cleaning.

6. Attachments

Do not use attachments not recommended by the video product manufacturer as they may cause hazards.

7. Water and Moisture

Do not use this video product near water. Some examples are: near a bath tub, wash bowl, kitchen sink, or laundry tub, in a wet basement, or near a swimming pool.

8. Accessories

Do not place this video product on an unstable cart, stand, tripod, bracket or table. The video product may fall, causing serious injury to a person, or serious damage to the product. Use only with stand, tripod, bracket, or table recommended by the manufacturer, or sold with the video product. Any mounting of the product should follow the manufacturer's instructions, and should use a mounting accessory recommended by the manufacturer.

9. Ventilation

This video product should never be placed near or over a radiator or heat register. If this product is placed in a built in installation verify that there is proper ventilation so that the camera temperature operates within the recommended temperature range.

10. Power Sources

This video product should be operated only from the type of power source indicated on the information label. If you are not sure of the type of power supply at your location, consult your product dealer.

11. Power-Cord Protection

Power cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them. Pay particular attention to cords at plugs, screws and the point where they exit the product.

12. Installation

Install this video product on a secure part of the ceiling or wall. If installed on an unsecured location the camera could fall causing injury and damage.

13. Lightning

For additional protection on this video product during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet and disconnect the power supply and cable system. This will prevent damage to the video product due to lightning and power-line surges. If lightning occurs, do not touch the unit or any connected cables in order to avoid electric shock.

14. Overloading

Do not overload the power supply or extension cords as this can result in a risk of fire or electric shock.

15. Object and Liquid Entry

Never push objects of any kind into this video product through openings as they may touch dangerous electrical points or short-out parts that could result in a fire or electrical shock. Never spill liquid of any kind on the video product.

16. Servicing

Do not attempt to service this video product yourself as opening or removing covers may expose you to dangerous electrical or other hazards. Refer all servicing to qualified service personnel.

17. Damage Requiring service

Disconnect this video product from the power supply and refer servicing to qualified service personnel under the following conditions.

- When the power-supply cord or plug is damaged.
- If liquid has been spilled, or objects have fallen into the video product.
- If the video product has been exposed to rain or water.
- If the video product does not operate normally by following the operating instructions in the instruction manual. Adjust only those controls that are covered by the instruction manual as an improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the video product to its normal operation.
- If the video product has been dropped or the cabinet has been damaged.
- When the video product exhibits a distinct change in performance which indicates a need for service.

18. Replacement Parts

When replacing parts be sure the service technician uses parts specified by the manufacturer or have the same characteristics as the original part. Unauthorized substitutions may result in fire, electric shock or other hazards.

19. Safety Check

Upon completion of any service or repairs to this video product, ask the service technician to perform safety checks to determine that the video product is in proper operating condition.



- The CAUTION label, shown on the left, is attached on the camera.

CAUTION TO REDUCE THE RISK OF ELECTRIC SHOCK.
DO NOT REMOVE COVER (OR BACK).
NO USER SERVICEABLE PARTS INSIDE.
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING :
TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

CAUTION :
CONNECT 24V AC UL LISTED CLASS 2 POWER SUPPLY.

FIELD INSTALLATION MARKING :
THIS INSTALLATION SHOULD BE MADE BY A QUALIFIED SERVICE PERSON AND SHOULD CONFORM TO ALL LOCAL CODES.

FCC (USA)-INFORMATION

NOTE : This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

USER-INSTALLER CAUTION : Your authority to operate this FCC verified equipment could be voided if you make changes or modifications not expressly approved by the party.


1. FEATURES AND DESCRIPTION

1. 24V AC/12V DC dual-voltage capable extends power choice.
2. Camera has the ability to automatically switch the display to color in daylight or black and white at night.
3. Camera synchronization mode is selectable between internal and line-lock.
4. The shutter speed is automatically adjusted according to the subject brightness.
5. Back Light Compensation (BLC) adjusts for strong backlight conditions.
6. White balance is automatically adjusted depending on color temperature variations (AWB)
7. Easy back focus adjustment for an easy installation.
8. Built-in 1/3 inch high – resolution CCD. (IK-6410A)
9. Minimum illumination of 0.2 lux at F1.2. (IK-6210A)
Minimum illumination of 0.2 lux at F1.0. (IK-6410A)
10. S/N ratio of 50dB.


2. COMPONENTS

(1) Camera	1
(2) Accessories	1
(a) Lens Connector (E.Y.C-221)	1
(b) Instruction Manual	1
(c) Lens Cap	1

3. PART NAMES AND FUNCTIONS

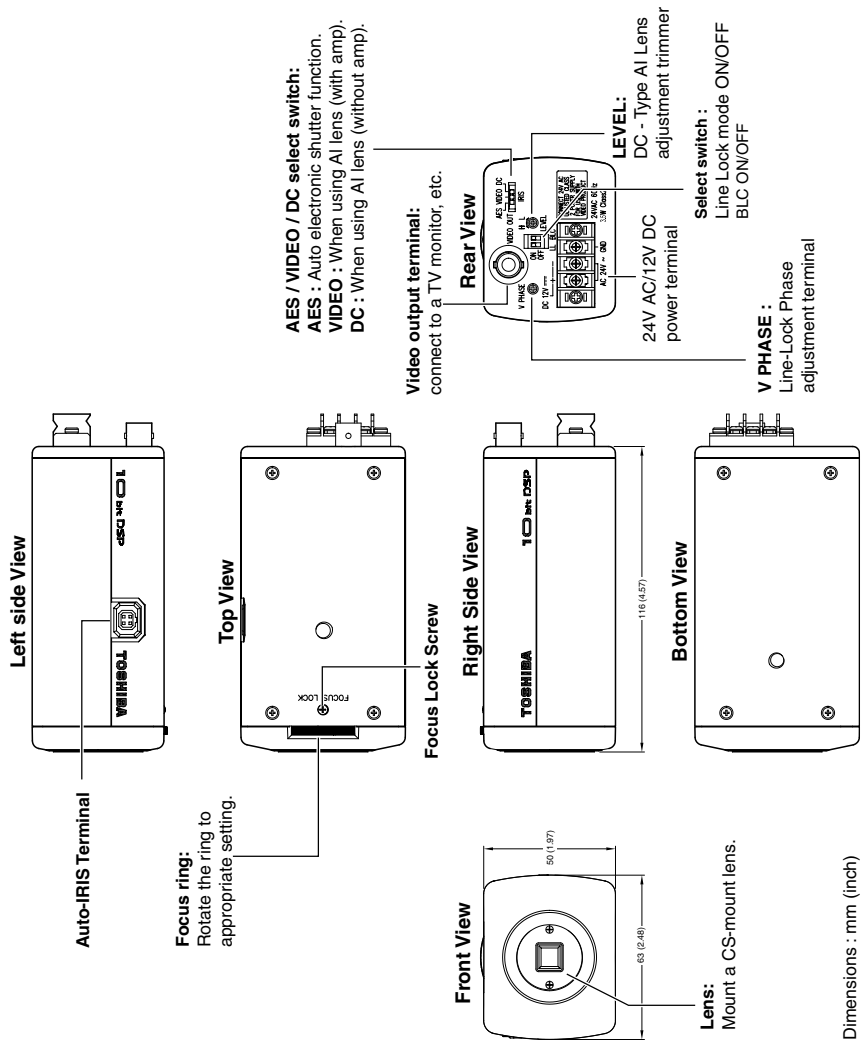

4. CAMERA INSTALLATION

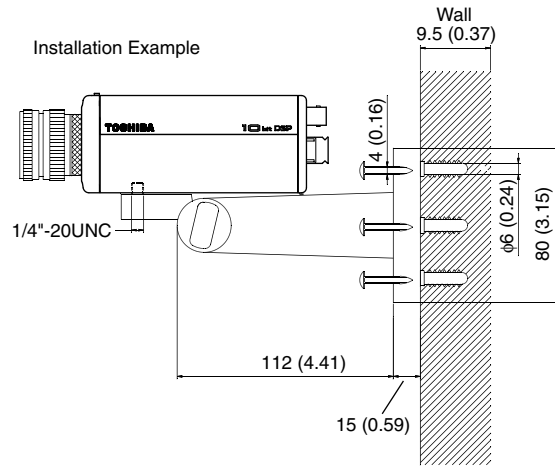

The Installation example is for reference only.
Mounting bracket is not included.


Dimensions : mm (inch)

5. CONNECTIONS AND OPERATIONS

Notes on connecting

- Power plugs of connected equipment must be disconnected before camera installation.
- A 75-ohm coaxial cable with connector (3C-2V or 5C-2V) is required for standard connection.
- For details of wiring and operation of equipment to be connected, refer to their operation manuals.
- Lens, power supply with cable, connectors and coaxial cable are not supplied with the camera.

5-1. Basic connection Single system configuration

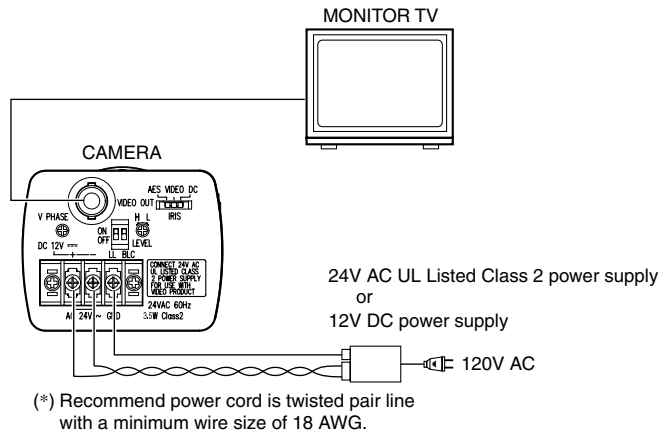

CAUTION: Never input 24V AC and 12V DC at the same time.

Do not overload power supply


The recommended power supplies for this camera are 6 watt minimum for each 24V AC UL Listed Class 2 power supply or 12V DC power supply.

5-2. Line-Lock Control

- Matching the vertical synchronization with the power frequency is called the Line-Lock.
- This function is activated when the LL switch is set to ON.



- When two or more cameras are switched by the video switcher for viewing by a monitor TV, the vertical sync. phase can be locked to the power frequency, and a stable vertical sync. is obtained without being disturbed at the time of switching.

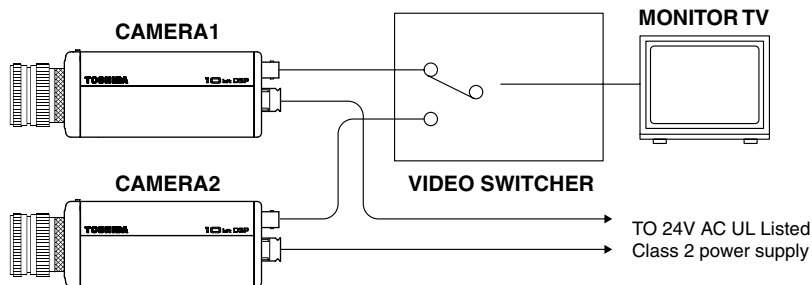

Note:

- The camera is synchronized to the power frequency of 60 ± 1 Hz covering a normal fluctuation of the power frequency. However, the camera may not cover a large fluctuation caused from the power generated by an engine generator, etc.
- It takes about 10 seconds or more until a stable synchronization is obtained after the power is turned on. This is normal, because several seconds are required to stabilize the camera against power noise.
- Refer to "7. LINE-LOCK PHASE" for adjustment.

5-3. Operation

1. Mount the lens to the camera.
2. Mount the camera to the camera mount.

Caution: If the lens weight is more than 2.2 lbs (1 kg) mount the lens to the camera mount.
Refer to section 6 for lens types and connection.

3. Connect the cables and support equipment to obtain a picture.
4. Adjust the lens aperture (if applicable).


6. LENS

Back-Focus Adjustment

Back-Focus is adjusted at the factory to accommodate most standard lenses. Sometimes, slight adjustment to the camera back-focus is necessary.


Loosen the Focus Lock Screw. Achieve a clear image by rotating the focus ring.

Tighten the Focus Lock Screw.




Auto-iris Lens

This camera supports two types of auto-iris lens: Video and DC (direct drive) types. Connect the auto-iris connector plug to the IRIS terminal on the side of the camera. Refer to the chart below for correct wiring and

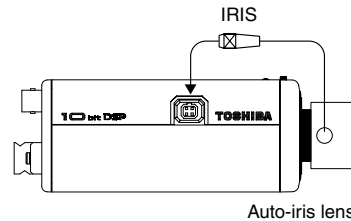

		Video IRIS Lens	Direct Drive IRIS Lens
IRIS terminal pin	1	+12V	Damp - (y)
	2	NC	Damp + (γ)
	3	VIDEO	Driver + (wh)
	4	GND	Driver - (g)
IRIS Switch		VIDEO position	DC position




7. LINE-LOCK PHASE

If two or more cameras within a system have different AC line phases are switched by the video switcher, the picture on the monitor TV will fluctuate vertically.

Connect 24V AC input lines of all cameras so that they all share the same phase.

If you still have vertical fluctuation, adjust the V.PHASE controller.

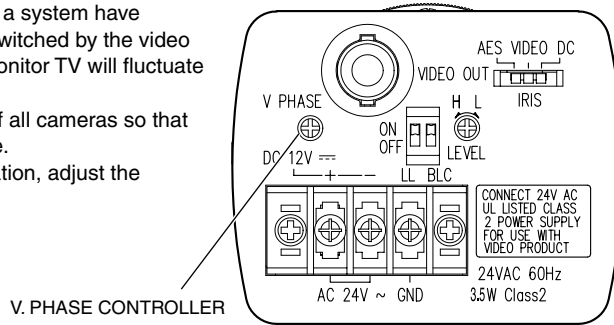

Note:

- Refer to "5-2. Line-Lock Control".


8. AUTOMATIC ELECTRONIC SHUTTER (AES)

Exposure time is controlled automatically within a range of 1/60 sec. to 1/100000 sec. to obtain an adequate signal when the IRIS switch is moved to AES.

When the back panel switch is turned to VIDEO or DC, the exposure time is fixed 1/60 sec.


9. BACKLIGHT COMPENSATION (BLC)

To activate backlight compensation, set the BLC switch to ON.



When the automatic electronic iris feature is used with an auto iris lens, the exposure adjustment is automatically performed so that a best picture is obtained at a monitor zone of about 50% in horizontal and about 50% in vertical direction.

This function is effective when a strong light enters the portion other than this zone and auto iris lens closes and darkens the area to view.



10. NOTES ON USE AND INSTALLATION

- **Do not aim the camera at the sun**
Never aim the camera at the sun even with the camera power off.
- **Do not shoot intense light**
Intense light such as a spotlight may cause a bloom or smear. A vertical stripe may appear on the screen. However, this is not a malfunction.
- **Treat the camera with care**
Do not drop the camera or subject it to intense vibration.
- **Never touch internal parts**
Do not touch the internal parts of the camera other than the parts specified.
- **Do not splash water on the camera**
Install the camera where the camera can be kept dry. If the camera gets wet, turn off the power and contact your dealer.
- **Keep the camera installation away from video noise**
If cables are wired near electric lighting wires or a TV set, noise may appear in images. In this event, relocate cables or reinstall equipment.
- **Check the ambient temperature and humidity**
Avoid using the camera where the temperature is hotter or colder than the specified operating range. Doing so could affect the internal parts or cause the image quality to deteriorate. Special care is required to use the camera at high temperature and humidity.
- **Should you notice any trouble**
If any trouble occurs while you are using the camera, turn off the power and contact your dealer. If you continue to use the camera when there is something wrong with it, the trouble may get much worse and an unpredictable problem may occur.

11. IN CASE OF PROBLEMS

Condition	Check Point
No image	<ul style="list-style-type: none">• Are the camera and connected equipment turned on?• Is the iris of the lens adjusted properly?• Are cables connected correctly?
Unnatural color	<ul style="list-style-type: none">• Is the monitor TV adjusted correctly?• Is the lighting too dim?

12. SPECIFICATIONS

	IK-6210A
Power	24V AC ~ ±10% 60Hz / 12V DC ∓ ±10%
Power consumption	3.5W with AI lens
Image sensor	1/3 inch CCD image sensor
Image pickup area	0.194 inch (4.92 mm) horizontal x 0.145 inch (3.69 mm) vertical
Effective picture element	510 horizontal x 492 vertical
Scanning system	2:1 interlace NTSC Standard TV system
Scanning frequency	15.75 KHz horizontal 60 Hz vertical
Synchronization	Line-Lock, Internal manually switchable
Resolution	350 Horizontal TV lines
Minimum illuminance of subject	0.2 lux (F1.2, More than 10% of image output $\gamma = 0.45$)
S/N	50 dB or more (weight ON)
Video output	VBS 1.0 V p-p / 75 ohms, composite
Output impedance	75 ohms unbalanced
White balance	Automatic (2500 K to 10,000 K)
Iris control	Video Out / Iris Driver Circuit Built in
Gain control	Average AGC (26 dB)
Backlight compensation	Manual ON/OFF switching, center zone light measuring system
Lens mount	CS mount
Ambient temperature	14°F to 122°F (-10°C to +50°C)
Ambient humidity	20% to 80%
Weight	0.77 lbs (350 g)
External dimensions	2.48(W) x 1.97(H) x 4.57(D) inches (63(W) x 50(H) x 116(D) mm)
Automatic electronic shutter	ON (1/60 s to 1/100000 s) /OFF (1/60 s)

	IK-6410A
Power	24V AC ~ ±10% 60Hz / 12V DC ± 10%
Power consumption	3.5W with AI lens
Image sensor	1/3 inch CCD image sensor
Image pickup area	0.194 inch (4.92 mm) horizontal x 0.145 inch (3.69 mm) vertical
Effective picture element	771 horizontal x 492 vertical
Scanning system	2:1 interlace NTSC Standard TV system
Scanning frequency	15.75 KHz horizontal 60 Hz vertical
Synchronization	Line-Lock, Internal manually switchable
Resolution	480 Horizontal TV lines
Minimum illuminance of subject	0.2 lux (F1.0, More than 10% of image output $\gamma = 0.45$)
S/N	50 dB or more (weight ON)
Video output	VBS 1.0 V p-p / 75 ohms, composite
Output impedance	75 ohms unbalanced
White balance	Automatic (2500 K to 10,000 K)
Iris control	Video Out / Iris Driver Circuit Built in
Gain control	Average AGC (26 dB)
Backlight compensation	Manual ON/OFF switching, center zone light measuring system
Lens mount	CS mount
Ambient temperature	14°F to 122°F (-10°C to +50°C)
Ambient humidity	20% to 80%
Weight	0.77 lbs (350 g)
External dimensions	2.48(W) x 1.97(H) x 4.57(D) inches (63(W) x 50(H) x 116(D) mm)
Automatic electronic shutter	ON (1/60 s to 1/100000 s) /OFF (1/60 s)

LIMITED WARRANTY

CCD SECURITY CAMERA IK-6210A/IK-6410A

The Imaging System Division ("ISD") of Toshiba America Information Systems, Inc. makes the following limited warranties with regard to this CCD Camera Model IK-6210A/IK-6410A ("Product"). These limited warranties extend to the Original End-User ("You[r]").

Three (3) Year Limited Warranty of Labor and Parts ISD warrants that this Product will perform in accordance with specifications for a period of three (3) years from the date of purchase by the Original End-User. During this three (3) year period, ISD will repair or replace the Product, if it does not perform as warranted. In order to take advantage of this Limited Warranty, You must: (a) call (877) 855-1349 to receive a RMA number; and (b) pay all transportation and insurance charges for shipment of the Product to the ASP or Toshiba Exchange Center. ISD reserves the right to substitute factory refurbished parts in place of those in need of repair.

Instruction Manual (Owner's Manual): You should read the Instruction Manual (Owner's Manual) thoroughly before operating this Product. Before seeking warranty service, you should check the troubleshooting guide in the Instruction Manual (Owner's Manual) and follow the instructions to correct the problem.

How to Obtain Warranty Service Step-by-step Procedures: To obtain warranty service, You should:

1. Contact Toshiba at (877) 855-1349 to first verify operation or installation assistance. (877) 855-1FIX
2. If technical support determines that the unit is defective, an RMA will be issued with return instructions for repair.
3. Securely pack the Product in the original carton and external shipping pack, include a letter explaining the problem with a copy of the bill of sale or proof of purchase.
4. Prepay all transportation and insurance costs.

Your Responsibilities: This Limited Warranty is subject to the following conditions:

1. You must provide the bill of sale or proof of purchase at the time that warranty service is required.
2. You must notify (877) 855 1349 within (30) days after you discover that the product does not perform in accordance with specifications during the Limited Warranty period.
3. You must pack the Product in its original carton using the original packing material. Then insert the original carton containing the Product into another carton with additional packing material before shipping the Product to an ASP or Toshiba Exchange Center.

DISCLAIMERS: ALL OTHER EXPRESS OR IMPLIED WARRANTIES ON THIS PRODUCT, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE HEREBY DISCLAIMED. SOME STATES DO NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES OR LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS. SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

IF THIS PRODUCT IS NOT IN GOOD WORKING ORDER AS WARRANTED ABOVE, YOUR SOLE AND EXCLUSIVE REMEDY SHALL BE THE REPAIR OR REPLACEMENT OF THE PRODUCT. IN NO EVENT WILL ISD OR ITS PARENT COMPANY OR ANY ASP BE LIABLE TO YOU OR ANY THIRD PARTY FOR ANY DAMAGES IN EXCESS OF THE PURCHASE PRICE OF THE PRODUCT. THIS LIMITATION APPLIES TO DAMAGES OF ANY KIND, INCLUDING ANY DIRECT OR INDIRECT DAMAGES, LOST PROFITS, LOST SAVINGS OR OTHER SPECIAL, INCIDENTAL, EXEMPLARY OR CONSEQUENTIAL DAMAGES, WHETHER FOR BREACH OF CONTRACT, TORT OR OTHERWISE, OR WHETHER ARISING OUT OF THE USE OF OR INABILITY TO USE SUCH PRODUCT, EVEN IF TAIS, ITS PARENT COMPANY, OR AN ASP HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR OF ANY CLAIM BY ANY OTHER PARTY. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR SOME PRODUCTS, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH MAY VARY FROM STATE TO STATE.

THIS LIMITED WARRANTY SHALL BE VOID IF THE PRODUCT OR PARTS HAVE BEEN SUBJECTED TO MISUSE, ABUSE, ACCIDENT, IMPROPER INSTALLATION, IMPROPER MAINTENANCE, OR USE IN VIOLATION OF ISD'S WRITTEN INSTRUCTIONS, OR WHERE THE PRODUCT HAS BEEN ALTERED OR MODIFIED WITHOUT ISD'S PRIOR AUTHORIZATION, OR UPON THE REMOVAL OR ALTERATION OF ISD'S FACTORY SERIAL NUMBER. LABOR SERVICE CHARGES FOR PRODUCT INSTALLATION, SET UP AND ADJUSTMENT OF CONTROLS ARE NOT COVERED BY THIS LIMITED WARRANTY

No person, agent, distributor, dealer, authorized service provider, or company is authorized to change, modify, or extend the terms of this Limited Warranty in any manner whatsoever. The time within which an action must be commenced to enforce any obligation of ISD arising under this Limited Warranty or under any statute, or law of the United States or any state thereof, is hereby limited to one (1) year from the date You discovered or should have discovered the problem. This limitation does not apply to implied warranties arising under state law. Some states do not permit limitation of the time within which You may bring an action beyond the limits provided by state law, so the above provision may not apply to You. This Limited Warranty gives You specific legal rights and You may also have other rights which vary from state to state.

TOSHIBA AMERICA INFORMATION SYSTEMS, INC.
Imaging Systems Division

TOSHIBA

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>