

The Biggest Thing in Environmental Housings


EH-2001



Weather resistant housing



Shown with optional sun shield

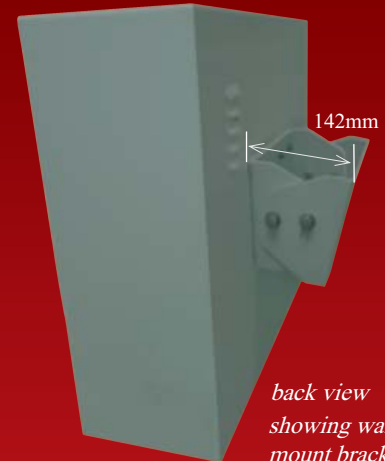

back view showing wall mount bracket (tilts 20°)

Security Enclosure for LCD Display Model LCD-2001VB

The EH-2001 is designed to offer the best protection possible to an LCD monitor in harsh applications. This rugged enclosure can be installed in a dusty or humid environment such as outdoor installations, warehouses, coalmines, manufacturing facilities, etc.

The EH-2001 is made entirely of aluminum, therefore maximizing dissipation of excessive heat generated by the LCD monitor if installed in an area with high temperature. Blower with built-in thermostat will be activated at 86°F, and the air will flow in and out of the housing through the rear vents. Special filters prevent dust and insect infiltration. A special wall mounting bracket is provided at the back of the enclosure and allows approximately 20° of tilt.

Available Color Options:

Standard color is dark metallic gray

Vents:

Vents are equipped with filters to prevent dust or insect infiltration. Clean or change filters periodically as needed.

Enclosure Dimensions:

External (WHD): 590 x 516 x 191mm / 23.2" x 20.3" x 7.5"

Internal (WHD): 559 x 457 x 152mm / 22"x 18"x 6"

Sunshield (WHD): 587 x 507 x 162mm / 23.1" x 20" x 6.4"

Net Weight: 27.8 lbs.

Net Weight with sunshield: 29.7 lbs.

Net Weight w/ LCD-2001VB and sunshield: 50.1 lbs.

Limited Availability Bulk Special Order may

Call for availability

Call **ToteVision** with your specifications for quotation for custom applications (bulk purchase special order only).

Optional Accessories

- EH-SS-2001 White color sun shield (shown above)
- EH-PB-2001 Threaded 1-1/2" NPT pipe bracket (shown above) for ceiling mounting (pipe not included)
- EH-YB-2001 Yoke bracket (shown above) for ceiling mounting (bulk purchase special order only)

Specifications subject to change without notice

©2007 ToteVision

Available through:

P.31

Download from www.Somanuals.com. All Manuals Search And Download.



Shown with ceiling mount option # 2: yoke bracket



Shown with ceiling mount option # 1: pipe bracket

- Weather and water resistant reversed louver system lets cool air in and warm air out.
- Filters prevent dust & bug infiltrations.
- Lexan window and tamperproof screws help to protect the monitor and to prevent vandalism.
- Double-wall one inch thick insulated construction helps to maintain desired temperature range in summer or winter, and it helps to minimize internal condensation.
- Optional sun shield enhances readability in direct sunlight.
- 4 conduit knockouts are available on L/R sides, and at the back and underneath the enclosure.
- 4" blower @ 110 CFM provides excellent heat dissipation.
- Heater (14.5 W) and thermostat help to control internal temperature in cold conditions.

GSA Schedule

GS-07F-0069L, SIN: 246-42(1), 246-50

1319 Dexter Ave. N • Ste. 020 • WA 98109
Tel: 206-623-6000 • FAX: 206-623-6609

E-mail: sales@totevision.com
<http://www.totevision.com>

TOTE VISION

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>