


# 10.4" LCD HD Monitors in Metal Housing

## LCD-1048HDM

## LCD-1048HDM2

3mm Thick  
Tempered Glass

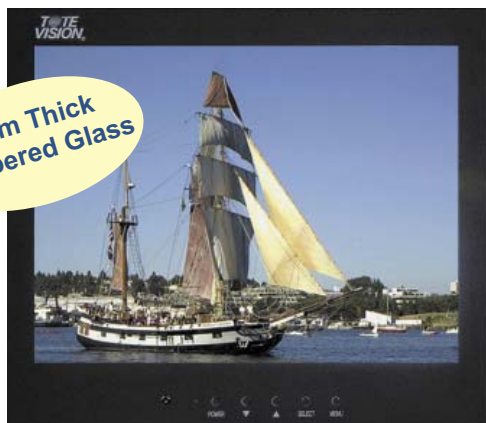

LCD-1048HDM



LCD-1048HDM2



Side View

- 3mm thick tempered glass helps to protect display panel from damage in the field
- HD compatible (supports 480p/i, 720p, 1080p/i)
- RS-232 serial control provided
- Composite video BNC IN/OUT provides security for video connections
- Underscan capability
- On-screen display controls, with front controls for Power, Select, Menu, and Volume Up/Down
- Wireless remote control with hot key allows easy toggling between sources
- Rear IR jack allows direct connection for use with IR repeater systems
- Screw-down DC feature provides additional security for power connection
- Speaker output on board allows screw down connection for R/L audio
- Built-in amplifier provides ample power to drive right and left stereo 8 ohm speakers
- Made of durable metal with black powder coating
- Built-in interface and proper cable exiting for wall arm mounting, VESA 75mm compliant
- Response time: 15/25 ms (rising/falling)
- SPS included, 100~240 VAC

### Dual Rack-mounted 10.4" Monitors Model LCD-1048HDM2 (shown above)

Dimensions (WHD): 19" x 8.75" x 2.3" (Occupies 5 RU)

### Optional Accessories

DC-1500	Factory approved car cord
HM-400	Under-cabinet hinge mount
WM-31	Wall mount bracket (fixed)
WM-302	Wall mount with swing arm & 4-way adjustable

- Display: 10.4" TFT LCD active matrix
- Back Light: 2 x CCFT
- Input Signal: [Composite, component, & S-Video, NTSC/PAL auto sensing] analog RGB
- Dot Pitch: 0.206 (H) x 0.206 (V)mm
- Resolution: 1024(H) x 768(V) [700 lines for CCTV] or
- Number of Pixels: 786,432 dots
- Brightness Rating: 350 cd/m<sup>2</sup> (Nit)
- Colors: 262,144
- Contrast Ratio: 500:1
- Viewing Angle L/R/T/B: 90/90/90/90 degrees
- Pixel Configuration: RGB Vertical Stripe
- Audio output: 5W x 2, 8 ohm
- Dimensions including BNC jack (WHD): 247 x 215 x 58mm / 9.7" x 8.5" x 2.3"
- LCD-1048HDM2: Dimensions (WHD): 19" x 8.75" x 2.3" (Occupies 5 RU)
- Actual visible screen size (WH): 210 x 158mm / 8.3" x 6.2"
- Operating temperature: 50 ~ 104°F or 10 ~ 40°C
- Storage temperature: 14 ~ 158°F or -10 ~ 70°C
- Power requirement/consumption: 12VDC, 2A, negative ground / 24W
- Rear Terminal Connections: Composite: BNC IN/OUT jacks, 2 RCA IN jacks  
Component: 3 RCA IN jacks  
S-Video IN jack  
Audio: 3.5 PC audio IN, RCA L/R audio inputs, L/R screw down speaker connectors, and 3.5 audio line OUT  
PC: 15-pin mini D-sub  
RS-232: 9-pin  
3.5 IR IN  
Power: 2.1mm DC jack, screw down DC connector
- LCD-1048HDM Weight: Net: 2.4 kg. / 5.3 lbs.  
Gross: 3.7 kg. / 8.05 lbs
- LCD-1048HDM2 Weight: Net: 6.07 kg. / 13.4 lbs.  
Gross: 8.77 kg. / 19.35 lbs



Schedule

GS-07F-0069L, SIN: 246-42(1), 246-50

Specifications subject to change without notice

P.17

©2009 ToteVision

30K

Download from [www.Somanuals.com](http://www.Somanuals.com). All Manuals Search And Download

1319 Dexter Ave. N. • Ste. 020 • Seattle, WA 98109  
Tel: 206-623-6000 • FAX: 206-623-6609

E-mail: [sales@totevision.com](mailto:sales@totevision.com)

[www.totevision.com](http://www.totevision.com)



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>