


The Biggest Thing in Rack Mounted LCD Monitors

LCD-1900VR LCD-1900V

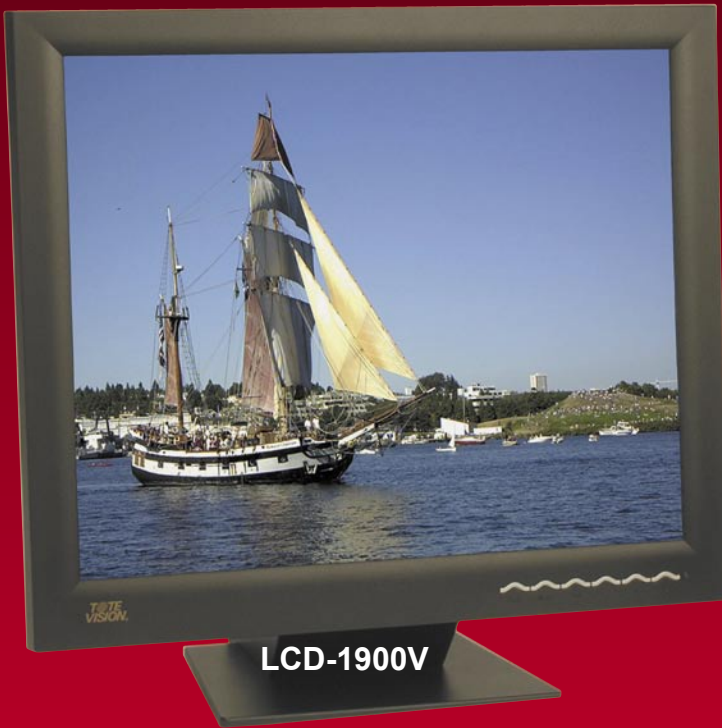

Active Matrix 19" Color LCD Monitors

- LCD-1900VR tilts 90° in rack for optimum viewing, occupies 9 rack units
- Hot key allows toggling between video, S-Video, component, and PC modes
- PIP: Picture in picture capability
- On-screen display for: brightness, contrast, back light, hue
- Low power consumption
- LCD-1900VR case made of durable metal
- LCD-1900V case made of durable ABS plastic
- Active matrix technology allows wide viewing angle
- Active matrix technology eliminates distortion
- LCD-1900VR: Response Time: 15ms / 10ms (rising/falling)
- LCD-1900V: Response Time: 25ms / 25ms (rising/falling)
- LCD-1900V has built-in removable desk stand and built-in interface for wall or arm mounting VESA 100mm FPMPMI compliant
- Includes switching power supply 90-240V, 12V, 50W

Optional Accessories

- | | |
|---------|--|
| DC-1500 | Factory approved car cord |
| HM-400 | Under-cabinet hinge mount |
| WM-30 | Wall mount bracket (fixed) |
| WM-302 | Wall mount with swing arm & 4-way adjustable |



HM-400



WM-302

**For touch screen for LCD-1900VR: order LCD-1900VRTS
Touch screen not available for LCD-1900V.**

- | | |
|---|---|
| Display: | 19.0" TFT LCD active matrix |
| Back Light: | Built-in (CCFT) |
| Input Signal: | Composite NTSC/PAL (auto switching), component, S-Video, Analog RGB |
| Resolution: | SXGA 1280(H) x 1024(V) dots |
| PC compatibility: | IBM / MAC compatible |
| Dot Pitch: | 0.264(H) x 0.264(V)mm |
| Brightness rating: | 450 cd/m ² (Nit) |
| Colors: | 16.7M |
| Contrast Ratio: | 500:1 |
| Number of Pixels: | 1,310,720 dots |
| Viewing angle L/R/T/B: | 85/85/85/85 degrees |
| Pixel Configuration: | Stripe |
| Input Signal Level: | 1.0V P-P (positive) 75 Ohm |
| LCD-1900VR: Dimensions (WHD): | 19" x 15.75" x 2.5" (Occupies 9 RU) |
| LCD-1900V: Dimensions w/o desk stand (WHD): | 444 x 376 x 73mm / 17.5" x 14.8" x 2.9" |
| LCD-1900V: Dimensions w/ desk stand (WHD): | 444 x 426 x 215mm / 17.5" x 16.8" x 8.5" |
| Actual visible screen size (WH): | 338 x 270 mm / 14.75" x 11.75" |
| Operating temperature: | 50 ~ 104°F or 10 ~ 40°C |
| Power Requirement: | Regulated 12VDC, A (TBA), negative ground |
| Power Consumption: | 48 W (max), 3 W (power saving off mode) |
| Includes switching power supply: | 100 ~ 240VAC (auto-sensing), 50 ~ 60Hz, A (TBA) |
| LCD-1900VR: Rear Terminal Connections: | BNC video IN/OUT jacks, S-Video, 15-pin mini D-sub (female), 4-pin DC IN jack, RCA video IN, RCA L/R audio IN, headphone jack, 9-pin component IN jack |
| LCD-1900V: Rear Terminal Connections: | BNC video IN/OUT jack, RCA video IN, 3.5 stereo audio IN/OUT jacks, 2.1mm DC IN jack, S-Video jack, 15 pin mini D-sub (female), 9-pin component IN jack |
| LCD-1900VR: Weight: | Net: 8.6 kg. / 19 lbs.
Gross: 11.8 kg. / 26 lbs. |
| LCD-1900V: Weight: | Net: 7.5 kg / 16.5 lbs.
Gross: 10 kg. / 22 lbs. |

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>