



Quality Refrigeration

OWNER'S MANUAL

Instructions for the installation, use & care of:

R & A Series

G Series


Compact Undercounter & Prep-Table
TE Series/TU Series/TS Series

I. RECEIPT & SUPPORT INSTALLATION:


You should carefully inspect your Traulsen unit for damage during delivery. If damage is detected, you should save all the crating materials and make note on the carrier's Bill Of Lading describing this. A freight claim should be filed immediately.

After uncrating the unit, select a level location for final placement. Install the legs or casters as shown below or, in the case of roll-in and roll-thru models, these must be sealed to the floor in accordance with local health codes.


R & A Series/G Series Supports ("Stem" type legs)

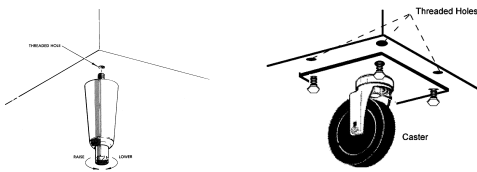

TE/TU/TS Series Supports




Compacts Supports ("Stem" type legs & casters)

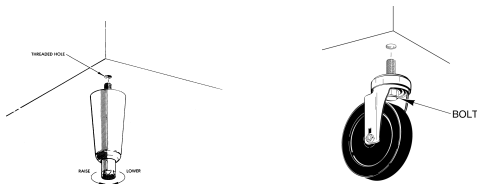

All models (except undercounters) should be installed to allow at least 12" of clear space above the unit. In all cases the louvers must be free of any obstruction which could prevent proper air-flow.

Most units are supplied with a cord and plug, which can simply be plugged into a dedicated appropriately sized outlet. For those requiring hard-wiring directly to the power supply, this should be done by only a qualified electrician.

NOTE: Some models (model numbers beginning with "UR" and single section dual-temps) require provision of a bottom mounted condensate evaporator. Follow instructions provided with part, along with this for installation.



II. Operation:

Most Traulsen equipment is plug and play, such as G Series & most Compacts. However, once power is supplied to the unit, some may require simple steps to get started using your Traulsen equipment, such as the:

R & A Series/TE Series/TU Series/TS Series Cabinets

Although fully operational the control will flash the cabinet temperature alternatively with the message ELE LOS (power loss). Press the alarm cancel button to cancel this message.

R & A Series Control




TE/TU/TS Series Control



Hot Food Holding Cabinets

Are shipped in the Off position. To begin use, first press the ON/OFF button , and then adjust to the desired operating temperature using the UP/DOWN buttons.

Hot Food Control



G Series/Compact Cabinets

Are fully operational and no action is required to start. Please note, most compacts are equipped with a electromechanical control.

Compact Cabinets (electromechanical)

The temperature is set at the factory but local conditions may necessitate slight adjustment. The temperature control is located in the front of the evaporator housing. To adjust, turn the adjustment screw with a screwdriver a small amount at a time; turning clockwise lowers the temperature. An "OFF" position is fully counterclockwise and interrupts power to the compressor and condenser fan only, not the entire refrigerator.

III. Control Basics:

Customer Access

To adjust any of the control's operating features, enter the customer access code. Use the code **0, A, 1** combined with the following: Press the **SET** button. The display will read **CUS** (Customer Access). Press the **SET** button. The display will show three zeros with the left zero flashing, Press the **SET** button. The display will show three zeros with the center zero flashing. Press the **DOWN ARROW** key to sequence through F, E, d, C, b, A, 9, 8, 7,...etc. When you reach A press **SET**. The display will show zero, A, zero with the right zero flashing. Press the **UP ARROW** key to sequence through 1, 2, 3, 4, 5, 6, 7, 8, 9, A, b,...etc. When you reach 1 press **SET**. The display will read **SP** (Thermostat Set Point). Press the **SET** button to view and again to exit. You are now ready to adjust the control. Listed below are the available parameters in the order they appear, using the down arrow key on the controller, you can use either the up or down arrow keys to scroll through the options.

Thermostat Set Point	Defrost Lockout 3
Thermostat Set Point Differential	Defrost Lockout 4
Temperature Scale	Dew Point Compensation Factor
Time (24-hour clock)	Room Temperature Offset
Date (month-day-year)	Audible Alarm Style
Daylight Savings	Cabinet Air Sensor Temp
Start Manual Defrost	Evaporator Coil Sensor
Defrost Lockout 1	Liquid Line Sensor
Defrost Lockout 2	

Defrost Lockout Feature

Defrost lockouts will allow the you to prevent defrost cycles from occurring for two hours during a designated time. Up to four can be set for any 24-hour period. Each of the lockout parameters covers 6-hours of the 24-hour clock. Note: The 24-hour clock must be set for this feature to operate at the correct time of day.

DL1/OFF	DL2/OFF	DL3/OFF	DL4/OFF
020 = 2:00 a.m.	080 = 8:00 a.m.	140 = 2:00 p.m.	200 = 8:00 p.m.
023 = 2:30 a.m.	083 = 8:30 a.m.	143 = 2:30 p.m.	203 = 8:30 p.m.
030 = 3:00 a.m.	090 = 9:00 a.m.	150 = 3:00 p.m.	210 = 9:00 p.m.
033 = 3:30 a.m.	093 = 9:30 a.m.	153 = 3:30 p.m.	213 = 9:30 p.m.
040 = 4:00 a.m.	100 = 10:00 a.m.	160 = 4:00 p.m.	220 = 10:00 p.m.
043 = 4:30 a.m.	103 = 10:30 a.m.	163 = 4:30 p.m.	223 = 10:30 p.m.
050 = 5:00 a.m.	110 = 11:00 a.m.	170 = 5:00 p.m.	230 = 11:00 p.m.
053 = 5:30 a.m.	113 = 11:30 a.m.	173 = 5:30 p.m.	233 = 11:30 p.m.
060 = 6:00 a.m.	120 = 12:00 p.m.	180 = 6:00 p.m.	240* = 12:00 a.m.
063 = 6:30 a.m.	123 = 12:30 p.m.	183 = 6:30 p.m.	243* = 12:30 a.m.
070 = 7:00 a.m.	130 = 1:00 p.m.	190 = 7:00 p.m.	010 = 1:00 a.m.
073 = 7:30 a.m.	133 = 1:30 p.m.	193 = 7:30 p.m.	013 = 1:30 a.m.
080 = 8:00 a.m.	140 = 2:00 p.m.	200 = 8:00 p.m.	020 = 2:00 a.m.

Defrost Lockout Feature (continued)

NOTE: First Enter Customer Access (see section III.)

When the control displays Thermostat Set Point, press the down arrow key until the control displays or . Press the set button . The display will show off. Press the arrow keys to set the start time. When the correct time is displayed, press the set button . You can press the up or down arrow keys to scroll to the next parameter or press the alarm cancel button to exit or leave inactive for 30 seconds.

Setting The Clock

The internal time clock must be set in order for the data storage memory to correctly log events and to allow any defrost lockout to occur at the correct time of day. If the clock is not set, the control assumes the time is 12 a.m. at the time power is supplied to the unit. The hours on a 24-hour time clock read the following way:

H01 = 1:00 a.m. H07 = 7:00 a.m. H13 = 1:00 p.m. H19 = 7:00 p.m.
 H02 = 2:00 a.m. H08 = 8:00 a.m. H14 = 2:00 p.m. H20 = 8:00 p.m.
 H03 = 3:00 a.m. H09 = 9:00 a.m. H15 = 3:00 p.m. H21 = 9:00 p.m.
 H04 = 4:00 a.m. H10 = 10:00 a.m. H16 = 4:00 p.m. H22 = 10:00 p.m.
 H05 = 5:00 a.m. H11 = 11:00 a.m. H17 = 5:00 p.m. H23 = 11:00 p.m.
 H06 = 6:00 a.m. H12 = 12:00 p.m. H18 = 6:00 p.m. H24 = 12:00 a.m.


NOTE: First Enter Customer Access (see section III.)






When the control displays Thermostat Set Point, press the down arrow key until the control display reads clock. Press the Set button . The display will show Hours. The right two numbers will be flashing. Use the arrow keys to set the hour. When the correct hour is displayed, press the Set button . The display will show minutes. The right two numbers will be flashing. Use the arrow keys to set the minutes. When the correct hour is displayed, press the Set button . The display will then read clock. You can use the up or down arrow keys to the next parameter or press the alarm cancel button to exit or leave inactive for 30 seconds.

Hot Food Holding Cabinet Operation

Hot Food Holding Cabinets differ from refrigerators and freezers in that they do not typically operate 24/7, and that there is a much broader range of safe storage temperatures to choose from (135-180°F). As a result these are regularly turned ON and OFF. To facilitate this Traulsen includes an ON/OFF button on their controls. This also includes a convenient Temperature Recall Feature. Upon being turned on each day, this automatically returns operation to the last previously set temperature.

Hot Food Holding Cabinet Operation (continued)

Turning the unit OFF/ON: After the temperature has been set, the customer can continuously turn the unit OFF and then back ON to the same temperature. To turn the unit on or off press the ON/OFF button .

Temperature Adjustment: Press the SET button  and the UP Arrow button  at the same time. The display will flash the current temperature setting or OFF (if the unit is turned off). Use the UP  or DOWN  Arrow buttons to adjust your desired temperature setting (temperature range is 140° thru 180°F, and OFF) then press the SET button . The display will go back to reading the cabinet temperature.

Important Alarm Events

Also, some R & A Series models can register alarm events on the control display such as:

- ELE LOS:** Indicates that the power supply had been interrupted.
- DOR OPN:** Indicates that a door has been left open.
- HI CAB:** Indicates that the cabinet air temperature is too high.
- LO CAB:** Indicates that the cabinet air temperature is too low.
- CLN FIL:** Indicates that the condenser coil requires cleaning.
- CAB SNR:** Indicates cabinet sensor has failed.
- COL SNR:** Indicates coil sensor has failed.
- DIS SNR:** Indicates liquid line sensor has failed.

IV. Defrost Cycles:

All **Upright Cabinets**, defrost cycles will occur every 8 hours for all refrigerators and every 4 hours for all freezers. All **TE & TU Series** defrost cycles occur every 2 1/2 hours. All **TS Series** defrost cycles occur every 3 hours and all **Compacts**, undercounter and prep table refrigerators, will occur every 6 hours.

Units equipped with an LED temperature display will indicate when a defrost cycle is in process.

V. GENERAL CARE:

WARNING: DISCONNECT ELECTRICAL POWER SUPPLY BEFORE CLEANING ANY PARTS OF THE UNIT.

All Traulsen equipment should be cleaned only with warm water, mild soap and a soft cloth. Apply with a dampened cloth and wipe in the direction of the metal grain.

Avoid the use of strong detergents and gritty, abrasive cleaners as they may tend to mar and scratch the surface. Do not use cleansers containing chlorine, this may promote metal corrosion.

Care should also be taken to avoid splashing the unit with water, containing chlorinated cleansers, when mopping the floor around the unit.

For stubborn odor spills, use baking soda and water (mixed to a 1 TBSP baking soda to 1 pint water ratio).

VI. ADJUSTING THE SHELVES:

Shelves Mounted On Pins

First select the desired location and remove the white plastic covers in the interior back and sides by rotating them counter-clockwise. Remove the shelf pins by rotating them counter-clockwise. Install the pins in the desired location by rotating them clockwise. Make sure the pin is securely tightened down. Do not over tighten. Slide the shelf into its new position, and replace the white plastic covers into the holes vacated by the shelf pins.

Shelves Mounted On Clips & Pilasters

Shelves and shelf clips are shipped with the unit. For each shelf, insert four (4) shelf clips into the pilaster slots at the same height. The shelf clips have a small projection on top which holds the shelf in position and prevents it from slipping forward. After installing shelf clips on pilasters, place shelves on clips.

VII. CLEANING THE CONDENSER:


WARNING: DISCONNECT ELECTRICAL POWER SUPPLY BEFORE CLEANING ANY PARTS OF THE UNIT.

This is the single most important thing you can do to promote long, efficient equipment life. For All **Upright Cabinets**, remove the two bottom screws securing the louver panel, then pivot this upwards allowing full access to the front facing condenser. For all **TE Series, TU Series & TS Series**, place hands under the louver panel and pull out and up to get louver panel off bracket of the unit. Contact factory service support for all **Compacts**.

R & A Series/G Series Louver




TE/TU/TS Series Louver



Vacuum or brush any dirt, lint or dust from the finned condenser coil, around the compressor and other cooling system parts as indicated. If significant dirt is clogging the condenser fins, use compressed air to blow this clear. When finished reverse the louver removal process as instructed above.

Condenser Coil



VIII. TROUBLE SHOOTING:

PROBLEM	POSSIBLE SOLUTION
1. Condensing unit fails to start.	a. Check if cord & plug has been disconnected.
2. Condensing unit operates for prolonged periods or continuously.	a. Are door(s) or drawer(s) closing properly? b. Dirty condenser or filter. Clean properly. c. Evaporator coils iced. Needs to defrost.
3. Food Compartment is too warm.	a. Check door(s) or drawer(s) and gasket(s) for proper seal. b. Check if a large quantity of warm food was recently added or the door was kept open for a long period of time. c. Microprocessor control setting is too high, readjust.
4. Food Compartment is too cold.	a. Check if a large quantity of very cold or frozen food has recently been added. Allow adequate time for the cabinet to recover its normal operating temperature. b. Adjust the microprocessor control to warmer setting, readjust.
5. Condensation on exterior surface.	a. Check door(s) or drawer(s) alignment & gaskets for proper seal. b. Condensation on the exterior surface of the unit is perfectly normal during periods of high humidity. c. Check perimeter heat setting and increase setting if <100.
6. Compressor hums & does not start.	a. Call for service.

IX. CONTACT/WARRANTY INFORMATION:

NOTE: Before making contact, please make sure you have model and serial number of unit available. Amp plate with information needed is located on the unit.



← Amp Plate

NOTE: You will be required to register for a login name and pass code to access our on-line information/registration.

Local Authorized Service Agent

1. Log onto www.traulsen.com
2. Select Contact Us/Dealer Directory (top right of screen)
3. Click on Service Directory tab
4. Select state by using the drop down box
5. Select Go

If local service agent is not satisfactory, you may contact Traulsen direct at (800) 825-8220 or (817) 740-6748 option 3 for Tech Support.

Replacement Parts

To purchase replacement parts for Traulsen and most Hobart refrigeration units, please contact our Ft. Worth facility by phone at (800) 825-8220 or (817) 740-6748 option 2 for parts.

Warranty

The warranties for your new Traulsen unit may be registered with us by contacting our Ft. Worth facility directly by phone (800) 825-8220 or (817) 740-6748 option 4 for warranty or you may register on-line.

1. Log onto www.traulsen.com
2. Select Contact Us/Dealer Directory (top right of screen)
3. Select Warranty Registration (lower right of screen)
4. Fill out information requested
5. Select Submit to complete unit warranty registration

Contact Us Direct

Traulsen
4401 Blue Mound Road Fort Worth, TX 76106
Phone: (800) 825-8220 or (817) 740-6748
Parts Fax: (817) 817-740-6748
Tech/Warranty Fax: (817) 740-6757

HOURS OF OPERATION:

Monday thru Friday 7:30 am - 4:30 pm CST



Quality Refrigeration

Traulsen
4401 Blue Moud Road Fort Worth, TX 76106
Phone (800) 825-8220 Fax (817) 740-6757
Website: www.traulsen.com

© 2011 Traulsen - All Rights Reserved

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>