




# ASSEMBLY INSTRUCTION FOR 29231-16

**Figure 1.**

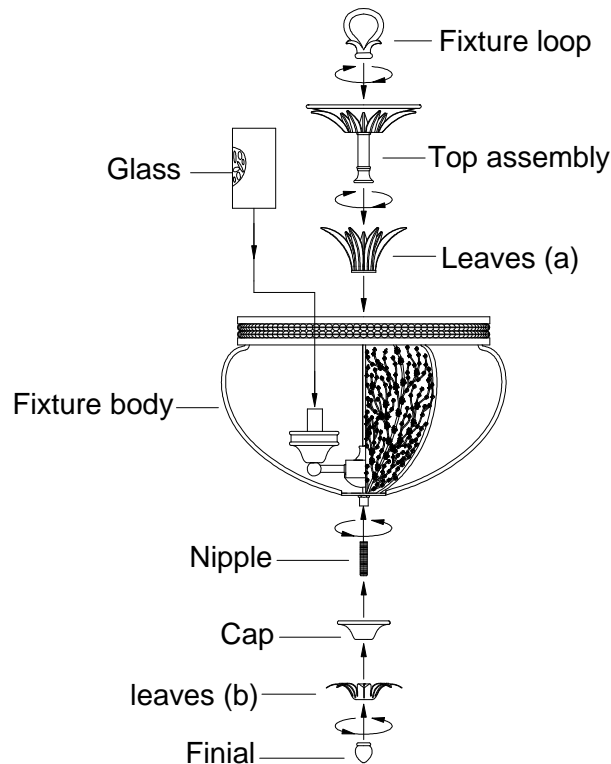

## **For chain-hung mounting:(refer to figure 1)**


1. Before beginning the assembly, carefully unpack and identify all parts referring to the illustration.
2. Unravel the supply power and ground wires and pass them through the center holes top assembly and fixture loop in turn.
3. Place leaves (a) over the protruding nipple from top of fixture body, then screw the bottom of top assembly onto the protruding nipple, screw fixture loop onto the protruding nipple at top of top assembly. Hands tighten until snug.
4. Thread the top end of nipple into the coupling at the bottom of fixture body. Hands tighten until snug.
5. Locate the cap and leaves (b) carefully, place them through the bottom end of nipple and secure with finial as shown in the illustrator.
6. Install proper bulbs (not provided) to each socket referring to the markings and labels on fixture for maximum wattage.
7. Place glass over each socket.
8. Restore power to the installation point ON. Retain this sheet for future reference.

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,  
CONSULT A LICENSED ELECTRICIAN!**



## ASSEMBLY INSTRUCTION FOR 29231-16

**Figure 2.**

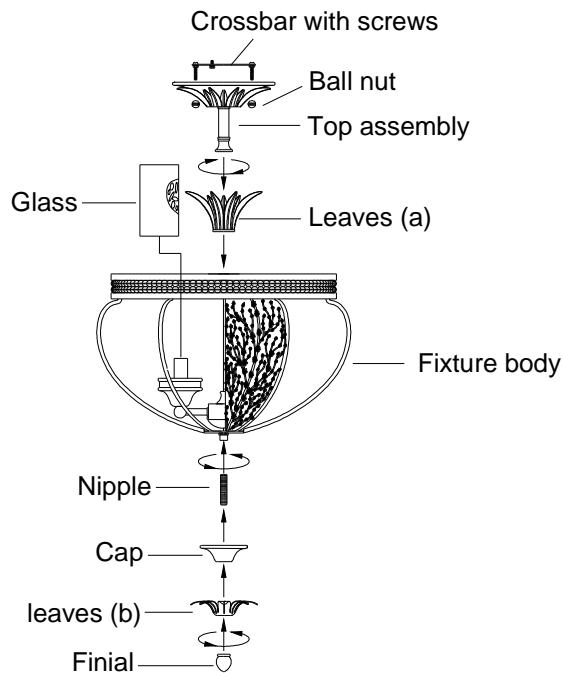

### **For direct ceiling mount:( refer to Figure 2.)**

1. Unravel the fixture supply and ground wires using wire cutters, trim the fixture supply and ground wires to approx. 6 inches in length from where wires exit top of fixture. Trim back wire jacket approx.3/4 inches.
2. With power to the installation point OFF, attach the crossbar with (2) mounting screws to ceiling mounted outlet box with (2) outlet box screws.
3. Make wires connections: (We recommend 2 people for this step). Position the fixture under the outlet box. Attach house ground wire to fixture ground wire. Proceed to attach both to the crossbar using ground screw. Using wire connectors connect the house white wire to the fixture supply wire (ribbed side); connect the house black (or red) wire to the fixture supply wire (smooth side). Wrap all connections with approved electrical tape.
4. With the connections properly made, align and pass the (2) mounting screws attached to crossbar through (2) mounting holes in canopy on top assembly. Locate (2) ball nuts and thread onto ends of mounting screws. Hands tighten until snug to secure fixture to ceiling. Be sure there are no trapped or pinched wires.
5. Thread the top end of nipple into the coupling at the bottom of fixture body. Hands tighten until snug.
6. Locate cap and leaves (b) carefully, place them through the bottom end of nipple and secure with finial as shown in the illustrator.
7. Install proper bulbs (not provided) to each socket referring to the markings and labels on fixture for maximum wattage.
8. Place glass over each socket.
9. Restore power to the installation point ON. Retain this sheet for future reference.

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,  
CONSULT A LICENSED ELECTRICIAN!**

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>