


1. Thread nipple into center hole of mounting strip about 4 complete turns. Lock in place with washer and hex nut. This nipple should extend long enough to protrud through the canopy when it is mounted.
2. Fasten mounting strip onto wall outlet box using two outlet box screws.
3. Connect the wires from the fixture to the power supply wires from outlet box.
 - A. Twist together white wire from the fixture with white wire from outlet box. Cover with wire connectors.
 - B. Twist together black wire from the fixture with black wire from outlet box. Cover with wire connectors.
 - C. Wrap the ground wires from fixture and the outlet box around the ground screw located on the mounting strip. Tighten the green ground screw to the mounting strip.
4. Pass the bracket through the nipple. Secure cap nut onto the nipple on the mounting strip until the fixture body is held firmly to the wall.
5. Install the bulb (not included) into socket. Do not use greater than 100-watt bulb.

NOTE: Carefully remove the fixture from the carton. Check that all parts shown in package parts 1 and parts 2 are included. Be carefully not to misplace any of the screws or wire connectors, which are needed for installing the fixture.

PACKAGE PART

Wire connector	2	Cap Nut	1
Green ground screw	1		
Outlet box screw	2		
Mounting strip	1		
3/8" Nut	1		
3/8" Nipple	1		
Washer	1		

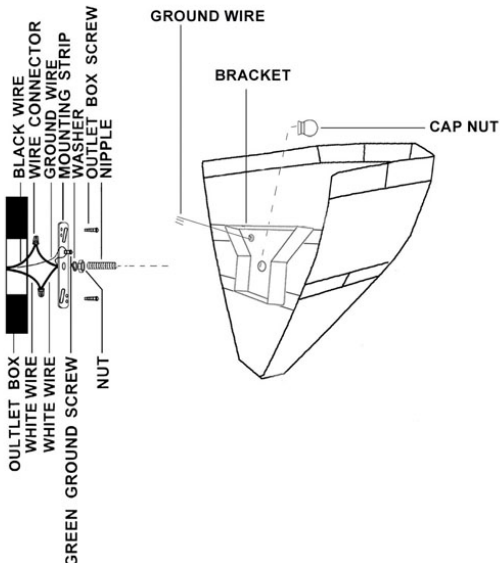

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>